

volume 1

linealight
COLLECTION


Light
up your
service,
easy!

linealight
COLLECTION


DOWNLIGHTS



MODOC
29




VOS | EVO
35




QUANTUM | EVO
37




WARP | EVO
39



EPITAX | EVO
41



QUANTUM
45



WARP
47



EPITAX
49



LORO
51




COB40
53



COB44
55




WOOFER
59




CELL
61



GYPSUM CELL
63



GYPSUM COLORING
65



GYPSUM
73



ILLUMINATOR
76



ONE TO ONE
81



OUTLOOK
83




BIRBA
85



STILO
87



CEILING



BATON
91




BIRBA
93




EMY
95




BOX
97



SATORI
99




ONE TO ONE
101




OUTLOOK
103



SINFONIA
105



CRUMB
107



OH!
109



OH! SMASH
111



GEMINI
113




GEMINI PAINT
115



HORIZON
117



STILO
119



DELFI
123



CRISTALBOLLA
127

PROJECTORS




JOINT
131



**GYPSUM
COLORING
POINT**
137



GOOSE
139



ETA
141




BART
143




BEEBO
145



DUCK
147



NAVATA OPTUS
149



BUBBLE
153

TRACK




OPTUS
157



MIC
161



ROLLIP35_T
163



TRACK SYSTEM
164

SYS
TEM




ROLLIP
170



INK
176



**NODE
SYSTEM**
190



**SINFONIA
SYSTEM**
206

SUSPENSIONS




FYLO+
218



TOUR SLIM
227



TOUR
229



POLO
233



BIRBA
235



OUTLOOK
237



SATORI
239



HALFPIPE
241




STRAIGHT
243



TU-O
249



TU-V
251



PERLA
253



SINFONIA
259




POE - POE PLUS
265




YO-YO
269



CREW
271




OH!
275






OH! SMASH
279




ARUBA
281

	ANTIGUA 283
	ANTILLE 285
	MIGUEL 287
	MORGANA 289
	DOGE 293
	HORIZON 297
	BASIN 299
	STILO 303
	DELFI 307
	CRISTALBOLLA 311

SURFACE (WALL & CEILING)

	ISIDE 317
	BOX 319
	TARA 323
	POLO 335
	CREW 339
	KIOO 343
	IGLOO 345
	TU-TOP 347
	ARUBA 349


WALL

	ANTIGUA 351
	DOGE 353
	BASIN 357
	BIRBA 363
	BART 365
	BEEBO 367
	DUCK 369
	SNAKE 371
	DUBLIGHT 373

	REGOLO 375
	METAL 381
	SKINNY 383
	HYPE 385
	GYPSUM PAINT 387
	BOX 389
	SATORI 393
	HALFPIPE 397
	STRAIGHT 399
	ANTILLE 401



GEMINI
403



GEMINI PAINT
407



JOINT
409



YO-YO
411



POE
413




ALBA
415



CURVÈ
417



PETIT
421



QUARA
423



VISSA
425



GYPSUM
427




BIBOK
435




ASPHO
437




NITUM
439



PICROL
443



GHILEA
445




ELIN
447



EYELET
449



FLOOR



HALFPIPE
453



POE
455



JOSHUA
457




OH!
459



OH! SMASH
461




ANTIGUA
463




DELFI
465



TABLE



CAMPING
469




DAMA
471



DUBCOLOR
473



GEMINI
475



SINFONIA
477

STEP LIGHTS

CEILING



ORMA
481



PORTIK
483




FYLO+ OUT
485



LIRA
487



OH!
491



OH! SMASH
493



VISION
495



PROJECTORS



EYELET65
499




PERISKOP
501



SHAKER
503



IRIS67
505



PROLAMP
507



VISION
509



CLIVO
511



SUSPENSIONS



LIRA
515




OH!
519



OH! SMASH
523


SURFACE (WALL & CEILING)



HORUS
526



BLANK
535



CHOBIN65
539



MYWHITE
541



SWITCH
549



BOND
551




STADIUM
553

WALL



FYLO+ OUT
557



CUBIT
559




LIRA
561



ALBA
563




STEP LIGHTS




OPTIWALL
567



ENVELOPE
569



QUARA
573



CLIP
577


INGROUND




CHIM
579



SAND
581



SUELO
585



ORMA
587



BERET
591



TEXO
593



ALCOR
595



ALCOR316
597



FOOTPAD
599

BOLLARDS



ASTROPEK
601




BUZZER
605




BOND PRO
607



BOND
609



PISTILLO
611



PEAK
613




DIRIGO CUT-OFF
615



OH!
619

FLOOR




OH! MARS
623



OH! SMASH
625



ROLLING SKY LANTERN
627



ROLLING SKY
629



BUTLER
633



LIRA
635



MARGE
637



ALIX
641



MAXI TUBE
643

INDUSTRIAL

UNDERWATER




MK68
647




SUB
649



RUBBER 3D PROTECTION
651




FLEX LIGHTS & PROFILES



RIBBON
657



SILICONE
663



PU_C PLUS
665




PROFILES
671



RUBBER
675



RUBBER_0
685



ELECTRONICS



CASAMBI
IN & OUT
MASTER
DIMMER
EMERGENCY
CABLES

INDOOR



DOWNLIGHT



CEILING



PROJECTORS



TRACK



**SYS
TEM**

SYSTEMS

SUSPENSIONS

SURFACE

WALL

STEP LIGHTS

MICRO SPOTLIGHTS

FLOOR

TABLE

OUTDOOR



CEILING



PROJECTORS



SUSPENSIONS

SURFACE

WALL

STEP LIGHTS



INGROUND



BOLLARD



FLOOR

INDUSTRIAL



UNDERWATER

INDOOR_OUTDOOR



**FLEX LIGHTS &
PROFILES**

FAMILY	INDOOR												OUTDOOR												IN.OU
																									
ALBA	-	-	-	-	-	-	-	-	-	415	-	-	-	-	-	-	563	-	-	-	-	-	-	-	-
ALCOR	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	595	-	-	-	-	-	-	-
ALCOR316	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	597	-	-	-	-	-	-	-
ALIX	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	641	-	-	-	-
ANTIGUA	-	-	-	-	-	-	283	351	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
ANTILLE	-	-	-	-	-	-	285	-	401	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
ARUBA	-	-	-	-	-	-	281	349	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
ASPHO	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	437	-	-	-	-
ASTROPEK	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	601	-	-	-	-	-	-
BART	-	-	-	143	-	-	-	-	-	365	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
BASIN	-	-	-	-	-	-	299	357	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
BATON	-	-	-	91	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
BEEBO	-	-	-	-	-	-	-	-	-	367	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
BERET	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	591	-	-	-	-	-	-
BIBOK	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
BIRBA	85	93	-	-	-	-	235	-	363	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
BLANK	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
BOND	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
BOND PRO	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
BOX	-	-	-	97	-	-	-	-	-	319	389	-	-	-	-	-	-	-	-	-	-	-	-	-	-
BUBBLE	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
BUTLER	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
BUZZER	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CAMPING	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CELL	61	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CHIM	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CHOBIN65	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CLIP	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CLIVO	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
COB40	53	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
COB44	55	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CREW	-	-	-	-	-	-	-	-	-	271	339	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CRISTALBOLLA	-	-	-	127	-	-	-	-	-	311	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CRUMB	-	-	-	107	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CUBIT	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
CURVÈ	-	-	-	-	-	-	-	-	-	-	417	-	-	-	-	-	-	-	-	-	-	-	-	-	-
DAMA	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	471	-
DELFI	-	-	-	-	-	-	-	-	-	307	-	-	-	-	-	-	-	-	-	-	-	-	-	465	-
DIRIGO	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
DOGE	-	-	-	-	-	-	-	-	-	293	353	-	-	-	-	-	-	-	-	-	-	-	-	-	-
DUBCOLOR	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	473
DUBLIGHT	-	-	-	-	-	-	-	-	-	-	-	373	-	-	-	-	-	-	-	-	-	-	-	-	-
DUCK	-	-	-	-	-	-	-	-	-	-	-	369	-	-	-	-	-	-	-	-	-	-	-	-	-
ELIN	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	447	-
EMY	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
ENVELOPE	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
EPITAX	49	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
EPITAX EVO	41	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
ETA	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
EYELET	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

FAMILY	INDOOR												OUTDOOR												IN_OU
																									
EYELET65	-	-	-	-	-	-	-	-	-	-	-	-	-	499	-	-	-	-	-	-	-	-	-	-	-
FLEXLIGHT PROFILES	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	671
FOOTPAD	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	599	-	-	-	-	-	-	-	-	-
FYLO+ / FYLO+ OUT	-	-	-	-	218	-	-	-	-	-	-	-	-	485	-	-	557	-	-	-	-	-	-	-	-
GEMINI	-	113	-	-	-	-	-	403	-	-	-	475	-	-	-	-	-	-	-	-	-	-	-	-	-
GEMINI PAINT	-	115	-	-	-	-	-	407	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
GHILEA	-	-	-	-	-	-	-	-	-	-	445	-	-	-	-	-	-	-	-	-	-	-	-	-	-
GOOSE	-	-	139	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
GYPSUM	73	-	-	-	-	-	-	-	427	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
GYPSUM CELL	63	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
GYPSUM COLORING	65	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
GYPSUM COLORING POINT	-	-	137	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
GYPSUM PAINT	-	-	-	-	-	-	-	387	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
HALFPIPE	-	-	-	-	-	241	-	397	-	-	453	-	-	-	-	-	-	-	-	-	-	-	-	-	-
HORIZON	-	117	-	-	-	297	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
HORUS	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	526	-	-	-	-	-	-	-	-	-
HYPE	-	-	-	-	-	-	-	385	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
IGLOO	-	-	-	-	-	-	345	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
ILLUMINATOR	76	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
INK	-	-	-	-	-	176	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
IRIS67	-	-	-	-	-	-	-	-	-	-	-	-	-	505	-	-	-	-	-	-	-	-	-	-	-
ISIDE	-	-	-	-	-	-	317	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
JOINT	-	131	-	-	-	-	-	409	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
JOSHUA	-	-	-	-	-	-	-	-	-	-	457	-	-	-	-	-	-	-	-	-	-	-	-	-	-
KIOO	-	-	-	-	-	-	343	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
LIRA	-	-	-	-	-	-	-	-	-	-	-	-	487	-	515	-	561	-	-	635	-	-	-	-	-
LORO	51	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
MARGE	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	637	-	-	-	-	-	-
MAXI TUBE	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	643	-	-	-	-	-
METAL	-	-	-	-	-	-	381	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
MIC	-	-	-	161	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
MIGUEL	-	-	-	-	-	287	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
MK68	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
MODOC	29	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
MORGANA	-	-	-	-	-	289	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
MYWHITE	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
NAVATA OPTUS	-	-	149	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
NITUM	-	-	-	-	-	-	-	-	-	-	439	-	-	-	-	-	-	-	-	-	-	-	-	-	-
NODE SYSTEM	-	-	-	-	190	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
OH!	-	109	-	-	-	275	-	-	-	-	459	-	491	-	519	-	-	-	619	-	-	-	-	-	-
OH! MARS	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	623	-	-	-	-	-	-
OH! SMASH	-	111	-	-	-	279	-	-	-	-	461	-	493	-	523	-	-	-	625	-	-	-	-	-	-
ONE TO ONE	81	101	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
OPTIWALL	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	567	-	-	-	-	-	-	-	-	-
OPTUS	-	-	-	157	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
ORMA	-	-	-	-	-	-	-	-	-	-	-	-	481	-	-	-	-	587	-	-	-	-	-	-	-
OUTLOOK	83	103	-	-	-	237	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
PEAK	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	613	-	-	-	-	-	-	-
PERISKOP	-	-	-	-	-	-	-	-	-	-	-	-	-	501	-	-	-	-	-	-	-	-	-	-	-
PERLA	-	-	-	-	-	253	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

[illegible]

LIGHT UP YOUR SERVICE,


EASY!

**Un catalogue, une application,
un système à 360°.**


Le système intégré Linealight Collection, dynamique et interactif, réunit des produits professionnels et décoratifs dans une expérience utilisateur vraiment intuitive, soutenue par un catalogue numérique accessible grâce à la nouvelle WebApp dédiée, avec des outils conçus pour faciliter la conception. Light Up Your Service? Easy!

**A catalogue, an app,
a 360° system.**

The dynamic and interactive Linealight Collection integrated system combines professional and decorative products in a truly intuitive user experience, supported by a digital catalogue accessible thanks to the new dedicated WebApp, with tools designed to facilitate design. Light Up Your Service? Easy!

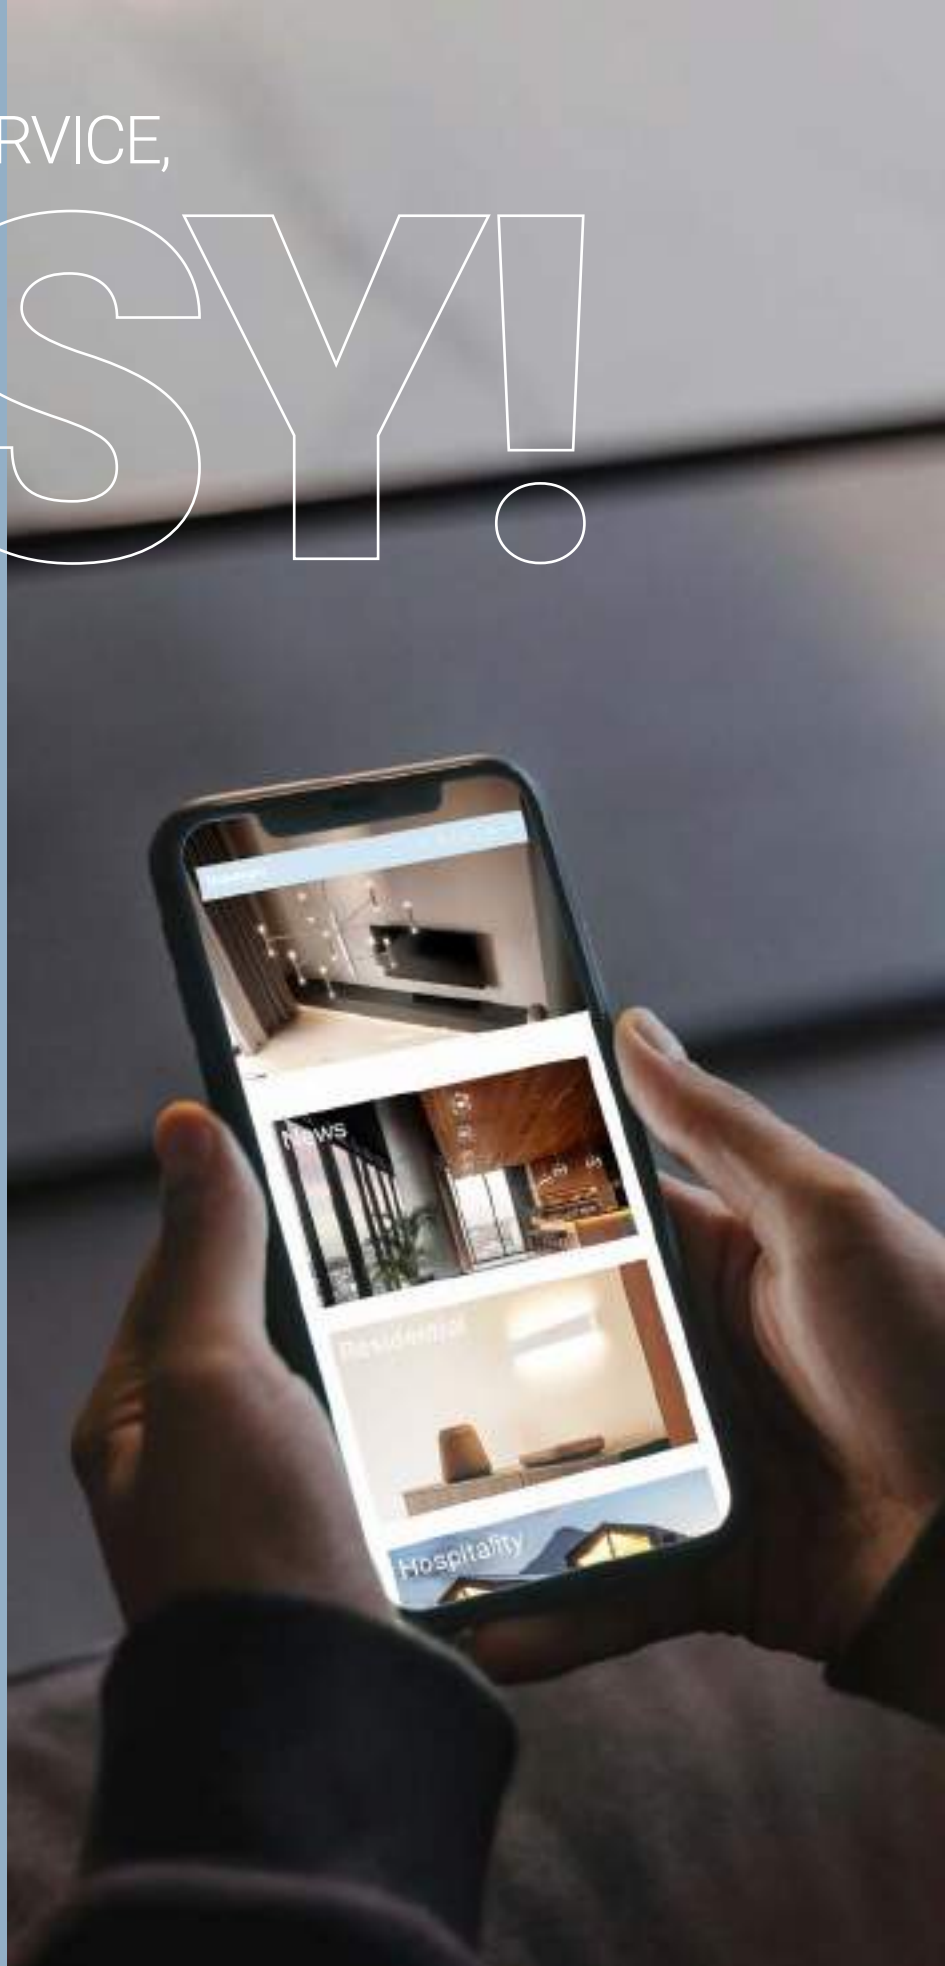

DISCOVER, CHOOSE AND BUY

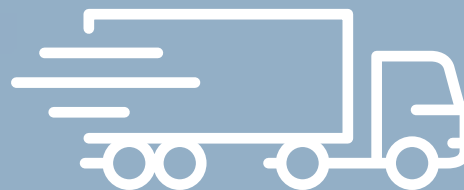

Fast delivery from 3 to 10 working days

LE SYSTÈME
LINEALIGHT
COLLECTION À
PORTÉE DE
CLIC

THE LINEALIGHT
COLLECTION
SYSTEM JUST A
CLICK AWAY

La WebApp créée spécialement pour le système intégré Linealight Collection offre une expérience simple, immédiate et intuitive. Grâce à une recherche rapide et à une mise en page graphique claire, vous pouvez découvrir, filtrer et sélectionner facilement les produits, tous disponibles avec une **livraison rapide de 3 à 10 jours ouvrables**, pour répondre à tous les besoins en peu de temps. Accédez à une vaste gamme de documents utiles, tels que des fiches techniques, des feuilles d'instructions, des images, des modèles 3D et des fichiers IESNA ou EULUMDAT. Avec le compte PRO (réservé aux clients Linea Light), il est possible de visualiser le prix et la disponibilité en temps réel, en complétant l'achat en quelques clics pour un processus rapide, sans surprises et toujours à portée de main.

*The WebApp created specifically for the integrated Linealight Collection system offers a simple, immediate and intuitive experience. Thanks to a quick search and a clear graphic layout, you can easily discover, filter and select products, all available with **fast delivery from 3 to 10 working days**, designed to meet every need in a short time. Access a wide range of useful documents, such as technical data sheets, instruction sheets, images, 3D models, and IESNA or EULUMDAT files. With the PRO account (reserved for Linea Light customers) you can view the price and stock in real time, completing the purchase in a few clicks for a fast process, without surprises and always at hand.*

linealightcollection.com



FROM QR CODE TO WEB APP



Scan QR CODE

Search bar



Select the product



Filter by technical features



Basic info and symbols


Images

Description

Technical features

Download section

Similar products

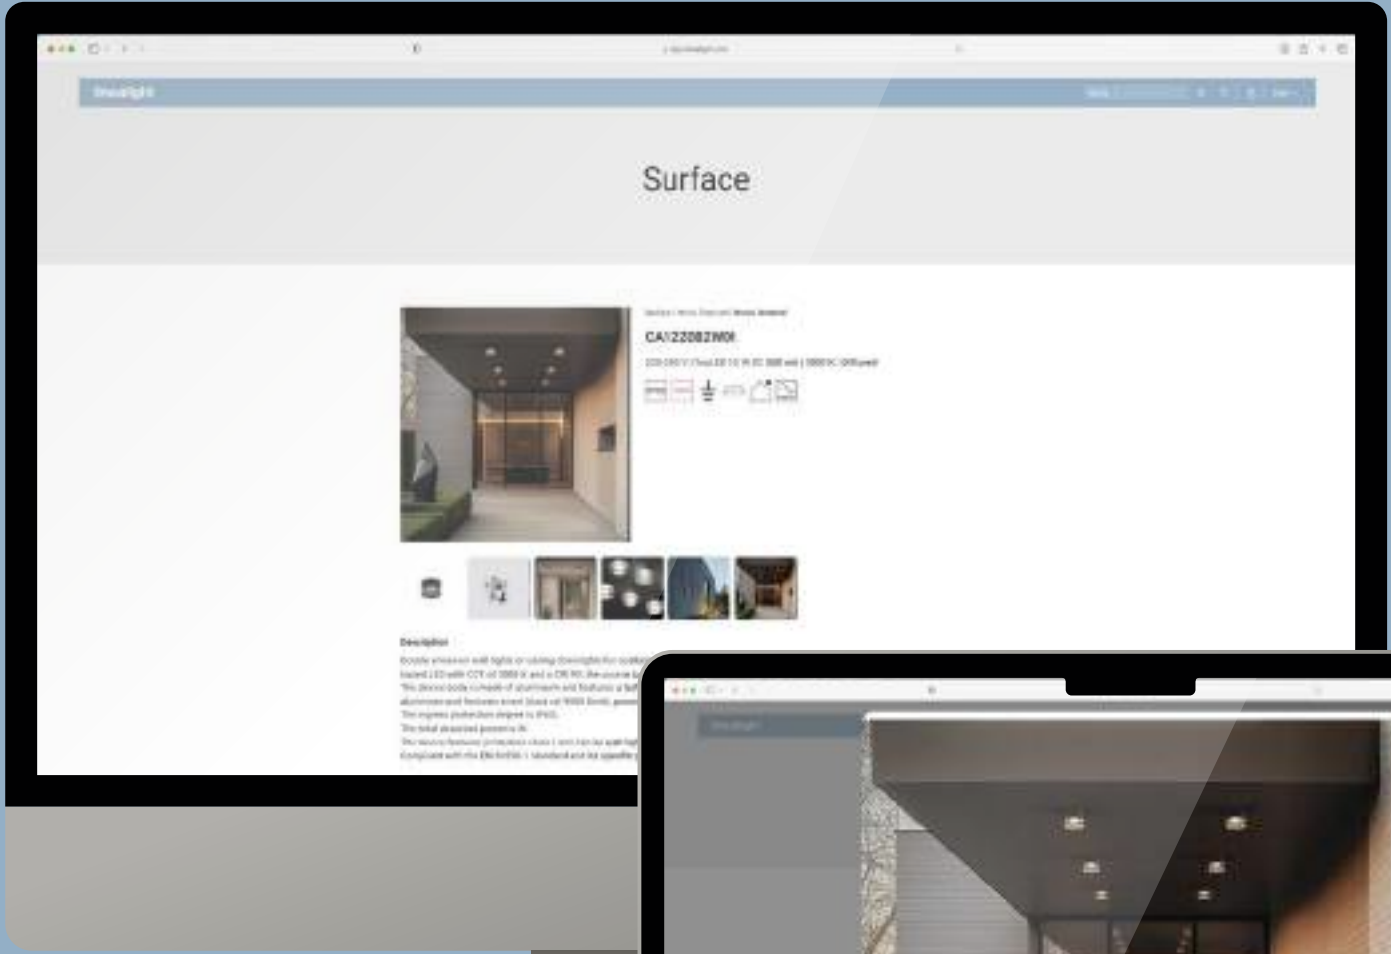


Available on
multiple devices
and platforms

ONE COLLECTION A THOUSAND PROJECTS

La collection la plus variée jamais lancée par Linea Light Group ! De nombreuses solutions techniques et décoratives, intérieures et extérieures, pour tous types de projets : résidentiels, hôtellerie, bars et restaurants, lieux de travail, commerces, grands espaces publics, paysages, urbains et bien plus encore. Tout ce dont vous avez besoin dans un seul catalogue, tout en stock et disponible avec une livraison rapide, pour commander immédiatement ce dont vous avez besoin et compléter votre projet ici et maintenant.

The most varied collection ever launched by Linea Light Group! Lots of technical and decorative solutions, indoor and outdoor, for every type of project: residential, hospitality, bar&restaurants, workplace, retail, large public spaces, landscape, urban and much more. Everything you need in a single catalogue, all in stock and available with fast delivery, so you can immediately order what you need and complete your project here and now.

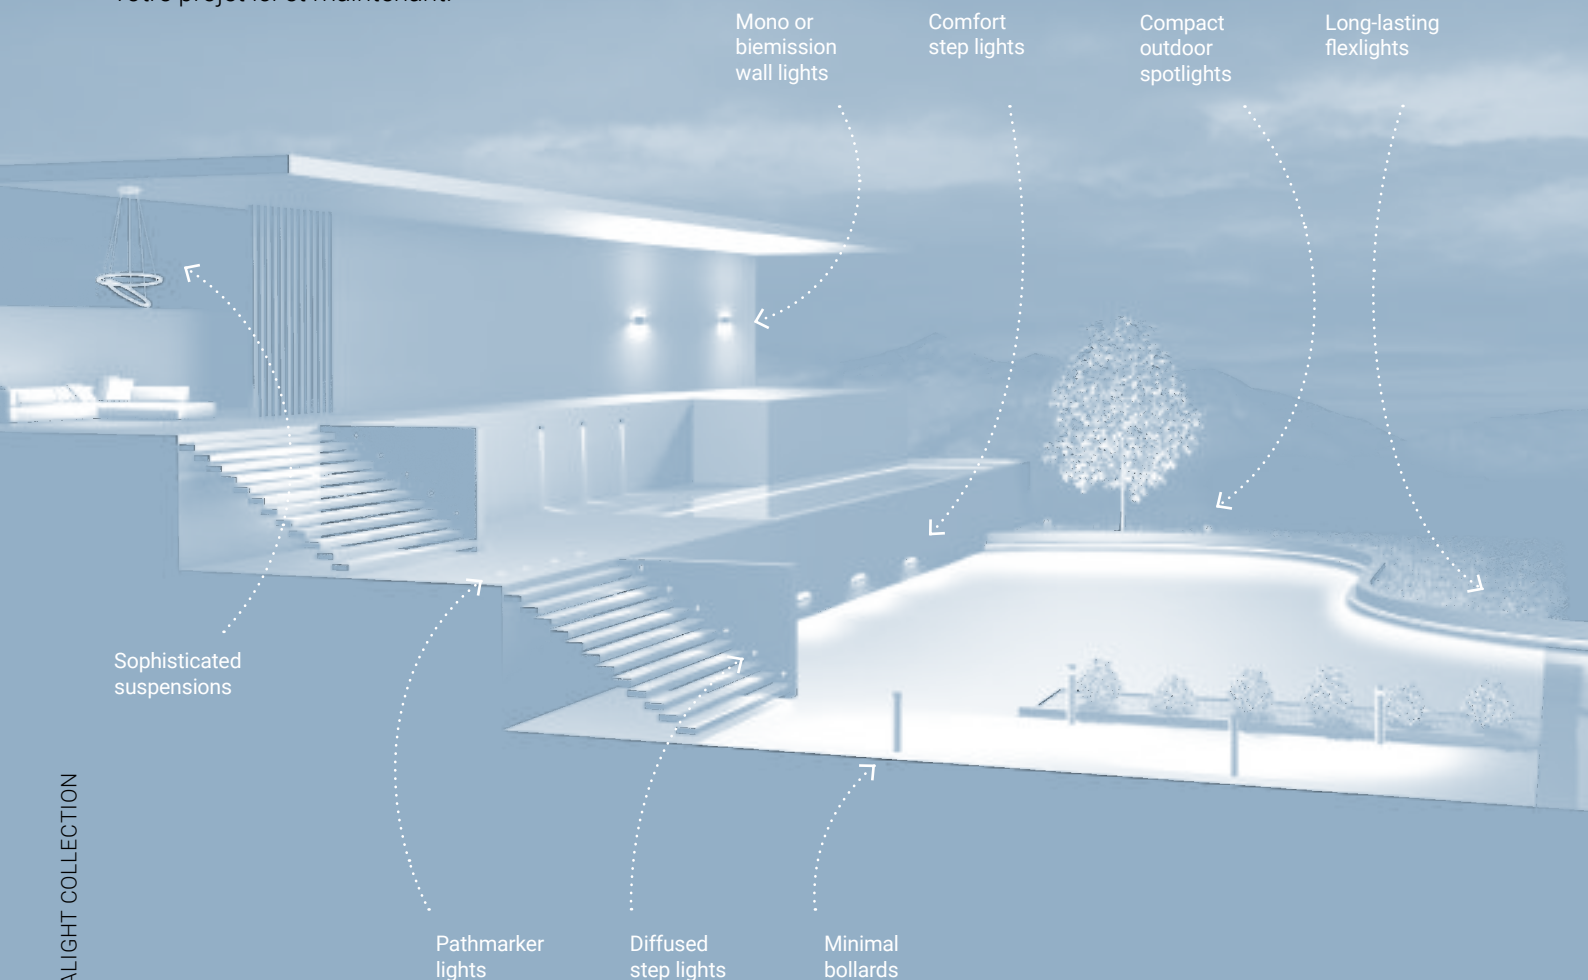

MIX&MATCH WITH CONSISTENCY

Découvrez les nouveautés et essayez des combinaisons inédites.

Design et performance se rejoignent pour créer des familles conçues pour interagir ensemble, dimmables, avec des températures de couleur cohérentes et des finitions fraîches pour des environnements contemporains. Chaque élément, bien que différent, s'harmonise avec les autres, offrant une liberté de composition sans sacrifier l'équilibre esthétique et la qualité de la lumière.

Discover the novelties and try out new combinations.

Design and performance come together to create families designed to interact with each other, dimmable, with consistent color temperatures and fresh finishes for contemporary environments. Each element, though different, harmoniously matches the others, offering compositional freedom without sacrificing aesthetic balance and light quality.

Finishes

Text white R9003

Text black R9005

Text peach R3012

Text petrol R6004

Text deep blue R5011





/01 RESIDENTIAL


Espace de vie au style contemporain.

Living area in contemporary style.



Lampadaire DELFI **(A)** à côté du canapé d'angle. Paire de suspensions CRISTALBOLLA **(B)** sur la table basse. Éclairage complémentaire pour le salon et le couloir avec des downlights WARP_R EVO **(C)**.

*Standing lamp DELFI **(A)** next to the corner sofa. Pair of CRISTALBOLLA **(B)** suspensions on the coffee table. Complementary lighting for living room and corridor with WARP_R EVO **(C)** downlights.*







/02 HALL

Établissement d'hébergement avec grande hall, espace détente et réception.

Hospitality structure with a large hall, relaxation area and reception.

Suspensions PERLA en versions P9 **(A)** et P12 **(B)** au-dessus de la table basse au centre de la zone de détente. Suspensions SINFONIA PUCCINI **(C)** au-dessus du comptoir de réception. Appliques de marche QUARA_R **(D)** le long du couloir. L'éclairage d'ambiance est complété par des profils encastrés FYLO+ DIRECT **(E)** avec des bandes RIBBON sur le mur de gauche et l'éclairage indirect par des bandes RIBBON PLUS dans la partie supérieure de la corniche du plafond.

*PERLA suspensions in P9 **(A)** and P12 **(B)** versions over the coffee table in the center of the relaxation area. SINFONIA PUCCINI **(C)** suspensions over the reception counter. QUARA_R **(D)** steplights along the corridor. The ambient lighting is completed by FYLO+ DIRECT **(E)** recessed profiles with RIBBON strips on the left wall and the indirect lighting through RIBBON PLUS strips in the upper part of the ceiling cove.*



(A)




(B)



(C)



(D)



(E)



/03 OFFICE

Environnement de travail avec bureau de direction et couloir.
Working environment with executive office and corridor.

Lampadaire HALFPIPE_FL **(A)** dirigé vers le mur pour intégrer indirectement l'éclairage du bureau. Suspension ROLLIP35_MP **(B)** au-dessus de la table de direction, avec diffuseur anti-éblouissement UGR<19. Pour l'éclairage du couloir et du mur en bois : système de suspension avec module linéaire diffus NODE SYSTEM_L **(C)** et modules avec projecteurs NODE SYSTEM_SP **(D)**.

Standing lamp HALFPIPE_FL **(A)** directed at the wall to indirectly integrate the office lighting. ROLLIP35_MP **(B)** suspension over the executive table, with anti-glare diffuser UGR<19. For corridor and wooden wall lighting: suspension system with diffused linear module NODE SYSTEM_L **(C)** and modules with projectors NODE SYSTEM_SP **(D)**.



/04 RETAIL

Boutique avec une zone d'entrée et un couloir avec une installation d'exposition.
Boutique with entrance area and corridor with a display setup.



Projecteurs MIC **(A)** montés sur un rail triphasé pour éclairer l'installation d'exposition et simultanément le couloir. Petite zone d'accueil à l'entrée éclairée par une paire de suspensions STILO **(B)**.

MIC projectors **(A)** mounted on a three-phase track to illuminate the exhibition setup and simultaneously the corridor. Small reception area at the entrance illuminated by a pair of STILO **(B)** suspensions.



/05 OUTDOOR

Contexte extérieur avec patio et zone de passage entourée d'îlots verts avec des plantes et des éléments naturels.
Outdoor environment with patio and walking area surrounded by green areas with plants and natural elements.

En face du mur à droite : uplight encastré ORMA (A). À gauche, lampe de sol ROLLING SKY LANTERN avec câble et prise shuko (B). Pour l'éclairage des zones vertes : projecteurs SHAKER (C) et bornes PISTILLO (D). Pour l'éclairage de la zone de passage : modules DIRIGO CUT-OFF (E) avec source de bande PU_C PLUS.

Facing the wall on the right: recessed uplight ORMA (A). On the left, floor lamp ROLLING SKY LANTERN with cable and Schuko plug (B). For green area lighting: SHAKER projectors (C) and PISTILLO bollards (D). For pathway lighting: DIRIGO CUT-OFF modules (E) with PU_C PLUS stripled source.




(A)





INDOOR

MODOC	29
EVO	32
VOS EVO	35
QUANTUM EVO	37
WARP EVO	39
EPITAX EVO	41
QUANTUM	45
WARP	47
EPITAX	49
LORO	51
COB40	53
COB44	55
WOOFER	59
CELL	61
GYPSUM CELL	63
GYPSUM COLORING	65
GYPSUM	73
ILLUMINATOR	76
ONE TO ONE	81
OUTLOOK	83
BIRBA	85
STILO	87



DOWNLIGHTS





Corps en aluminium, diffuseur en technopolymère blanc.


Aluminium body, white technopolymer diffuser.

MODOC



Modoc_R

powerLED CRI 90 | 630 mA | 2 W DC




Opt	2700K 227 lmS - 149 lmD
37°*	C00771WHMML
52°	C00771WHMWF

Opt	3000K 242 lmS - 168 lmD
37°*	C00771WHWML
52°	C00771WHWWF

Modoc_R

arrayLED CRI 90 | 500 mA | 6 W DC




Opt	2700K 814 lmS - 523 lmD
24°	C00579WHMFL
52°	C00579WHMWF

Opt	3000K 860 lmS - 542 lmD
24°	C00579WHWFL
52°	C00579WHWWF

Modoc_R

arrayLED CRI 90 | 300 mA | 10 W DC



Opt	2700K 1707 lmS - 1317 lmD
29°*	C00580WHMFL
53°**	C00580WHMWF

Opt	3000K 1787 lmS - 1379 lmD
29°*	C00580WHWFL
53°**	C00580WHWWF

Electronics

Modoc_R 2W

89147	ON/OFF - 1-2 art. - Ø 29
99376	ON/OFF - 3-6 art. - Ø 29
99105	ON/OFF - 6-12 art. - Ø 64
Converter + Driver 24V	
99710	24V DC Converter 0/1-10V 1-6 art. - Ø 29
99713	24V DC Converter DALI 1-6 art. - Ø 29
99374	Driver 24V DC - 75W - Ø 56
99331	Driver 24V DC - 150W - Ø 70

Modoc_R 6W

99377	ON/OFF - 1 art. - Ø 29
99106	ON/OFF - 2-3 art. - Ø 64
C-E100004	0/1-10V - 1 art. - Ø 31
C-E100005	DALI/PUSH - 1 art. - Ø 31
C-E100001	DALI/PUSH - 2-3 art. - Ø 54

Modoc_R 10W

99734	ON/OFF - 1 art. - Ø 48
99732	0/1-10V - 1 art. - Ø 48
83322	DALI/PUSH - 1 art. - Ø 48

Recessed casings

Modoc_R 2W / 6W / 10W

89373	For brickwork - 213x138x125
89374	For brickwork with power supply housing - 370x120

Accessories

Modoc_R 10W

C-F600002	Suction cup for removal protective screen
83382	Spot lens kit (20°)
83383	Flood lens kit (30°)
C-K400132	Medium Wide Flood lens kit (44°)
83384	Wide Flood lens kit (53°)
C-U300019	Elliptic filter
C-U300035	Transparent closing screen
C-U300036	Diffused closing screen

Finishes ☐ Painted white





Corps en aluminium, diffuseur en technopolymère blanc.


Aluminium body, white technopolymer diffuser.

MODOC



Modoc_R


arrayLED CRI 90 | 550 mA | 18 W DC



Opt	2700K 3090 lmS - 2477 lmD
31°*	C00581WHMML
54°**	C00581WHMWF
Opt	3000K 3129 lmS - 2528 lmD
31°*	C00581WHWML
54°**	C00581WHWWF

Modoc_R

arrayLED CRI 90 | 750 mA | 26 W DC



Opt	2700K 4096 lmS - 3081 lmD
25°*	C00582WHMFL
51°**	C00582WHMWF
Opt	3000K 4268 lmS - 3209 lmD
25°*	C00582WHWFL
51°**	C00582WHWWF

Electronics

Modoc_R 18W / 26W

C-E100033 ON/OFF - 1 art. - 50

C-E100034 DALI/PUSH - 1 art. - 50

Recessed casings

Modoc_R 18W / 26W

C-C100016 For brickwork to be completed with accessory C-C100020 382x342xh142

C-C100017 For brickwork to be completed with accessory C-C100020 687x382xh142

C-C100020 Grille for round hole

Accessories

Modoc_R 18W / 26W

C-F600002 Suction cup for removal protective screen

Modoc_R 18W

C-K400134 Flood lens kit (25°)

C-K400135 Medium Flood lens kit (30°)

C-K400136 Medium Wide Flood lens kit (44°)

C-K400148 Wide Flood lens kit (54°)

C-U300037 Transparent closing screen

C-U300038 Diffused closing screen

C-U300020 Elliptic Filter

Modoc_R 26W

C-K400138 Spot lens kit (19°)

C-K400139 Flood lens kit (27°)

C-K400140 Medium Wide Flood lens kit (40°)

C-K400141 Wide Flood lens kit (50°)

C-U300039 Transparent closing screen

C-U300040 Diffused closing screen

C-U300021 Elliptic Filter

Finishes ☐ Painted white

EVO LIGHT FOR TOMORROW



Linea Light Group a développé une série d'appareils contribuant à réduire l'impact environnemental, sans compromettre la qualité ou la fonctionnalité. Les downlights EVO sont des produits innovants, interchangeables, totalement recyclables et durables.

Linea Light Group designed a series of luminaires developed to help reduce environmental impact without compromising quality or functionality. EVO downlights are innovative, interchangeable, totally recyclable and sustainable.

CIRCULAR PRODUCT:

61% RECYCLED
98% RECYCLABLE
98% REPAIRABLE

SUSTAINABLE

Une philosophie d'entreprise bien établie, qui utilise un processus de production à faible impact environnemental.

A company philosophy which applies a low environmental impact production process.

RECYCLABLE


Les appareils EVO et toutes leurs composantes sont facilement démontables. À la fin de leur durée de vie, ils peuvent être recyclés ou éliminés dans des centres spécialisés.

EVO luminaires and all their components are easy to disassemble. They can be recycled or disposed to the dedicated centres at the end of their life.


INTERCHANGEABLE

Il est possible de remplacer facilement une pièce spécifique sans avoir à acheter un produit entièrement neuf. Cela réduit non seulement les coûts, mais aussi la quantité de déchets produits.

It is very easy to replace a specific part without having to buy a completely new product. This not only reduces costs but also the amount of waste produced.



WARP



QUANTUM




FIXED




WHITE



BLACK



4 W



9 W



NARROW
SPOT



SPOT
(UGR<16)



MEDIUM
FLOOD



MEDIUM
W.FLOOD

2700K
3000K
4000K

2200K
2700K
3000K
4000K



HONEYCOMB




ELLIPTIC FILTER



MODULAR LIGHTING FOR SUSTAINABLE PROJECTS


Chaque élément de la nouvelle série de downlights EVO a été conçu pour être monté et démonté sans l'utilisation d'outils, mais simplement par des mouvements mécaniques. Ce système innovant permet également de personnaliser son appareil avec de nombreuses combinaisons de design esthétique, d'optique, de CCT et de puissance.

Every element of the new series of Evo downlights has been designed to be assembled and disassembled without using any tools, but just with mechanical movements. This innovative system also allows you to customise your fixture with several combinations of aesthetics design, optics, colour light temperatures and powers.

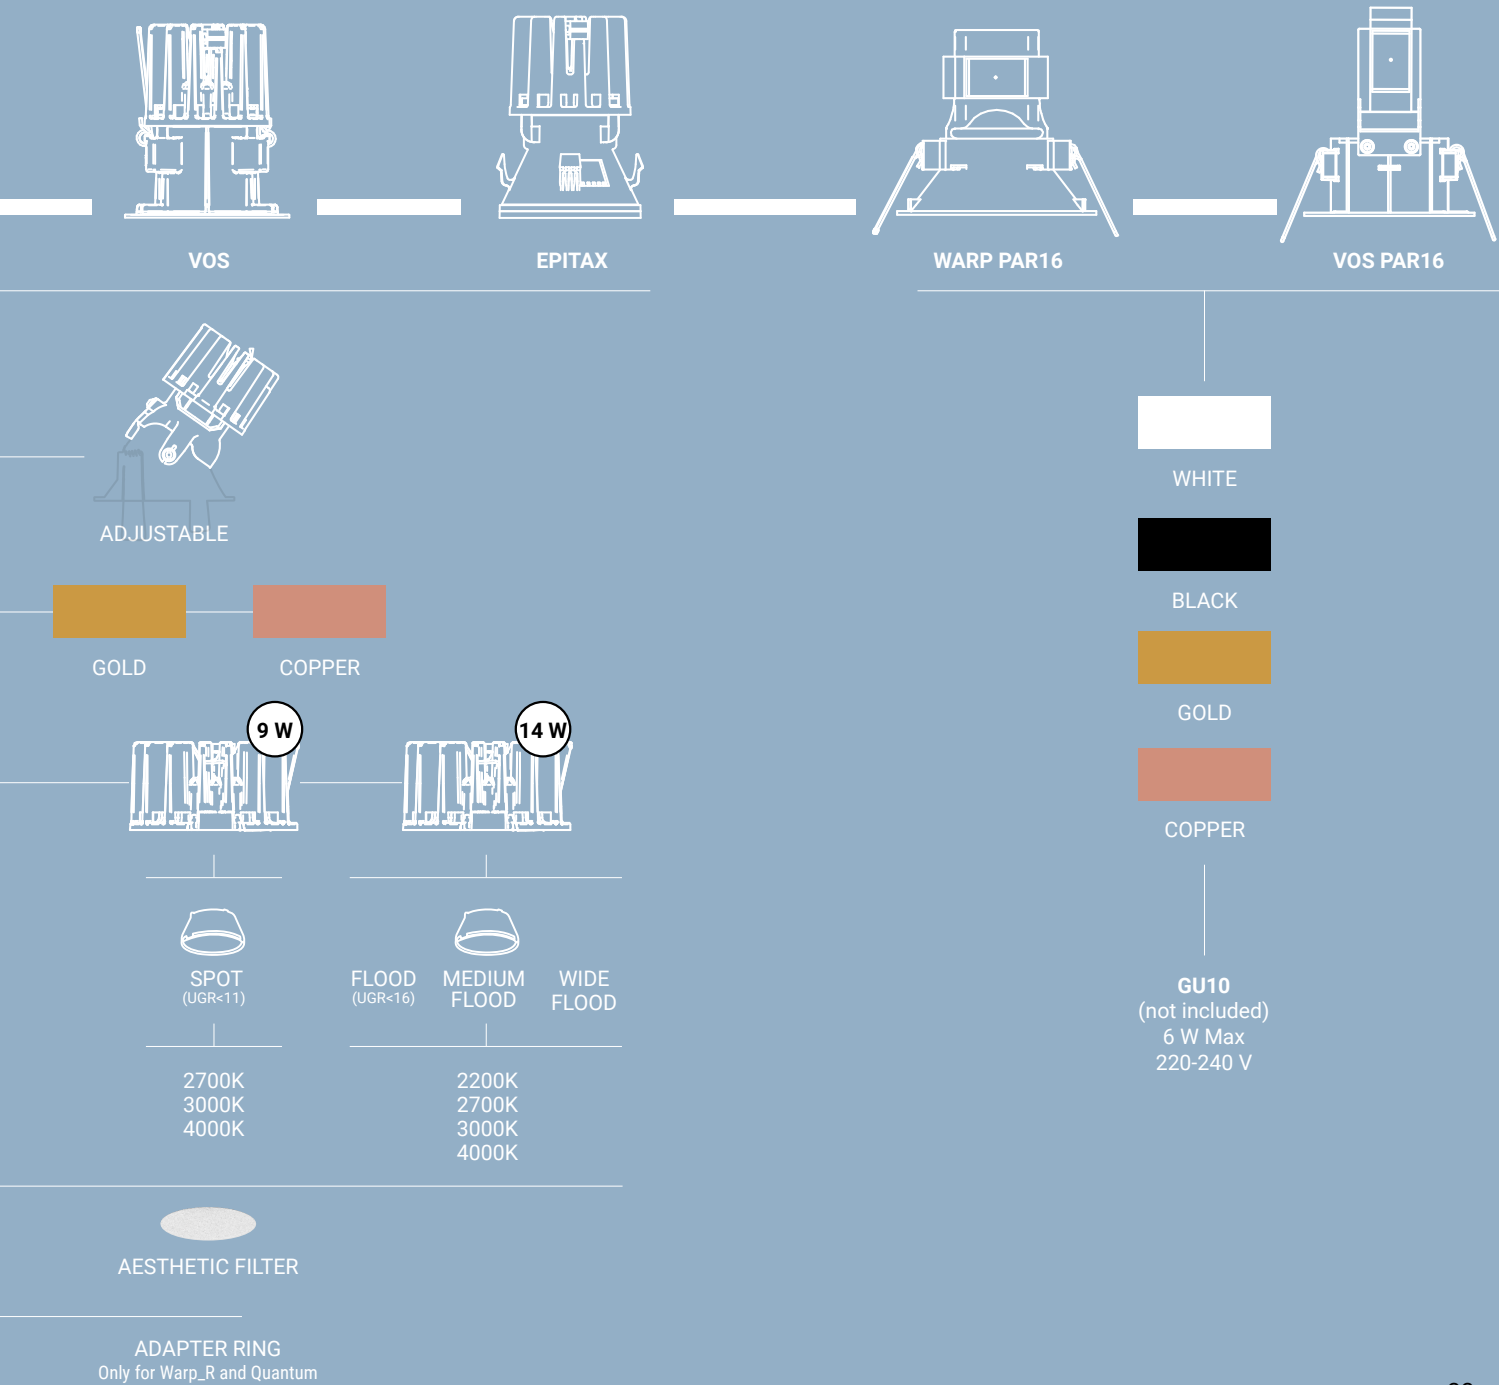




Vos_R EVO
arrayLED CRI 90 | 700 mA | 9 W DC



Opt	2700K 1059 lms - 664 lmD
30°*	77330M30
30°*	77331M30
42°**	77330M45
42°**	77331M45

Opt	3000K 1119 lms - 702 lmD
30°*	77330W30
30°*	77331W30
42°**	77330W45
42°**	77331W45



Vos_R EVO
arrayLED CRI 90 | 400 mA | 14 W DC



Opt	2700K 2214 lms - 1658 lmD
32°*	77334M30
32°*	77335M30
54°**	77334M50
54°**	77335M50

Opt	3000K 2318 lms - 1737 lmD
32°*	77334W30
32°*	77335W30
54°**	77334W50
54°**	77335W50

Vos_R Par16 EVO
220-240 V



GU10 Max 6 W - Ø 50 mm (not included)
C00755WHEZZ
C00755BBEZZ



Corps en aluminium, diffuseur en technopolymère blanc ou noir.


Aluminium body, white or black technopolymer diffuser.

VOS | EVO



Vos_RJ EVO

arrayLED CRI 90 | 700 mA | 9 W DC



Max inclination:
+20° with double panel
+35° with single panel




Opt	2700K 1059 lms - 584 lmD
28°	C00613WHMFL
28°	C00613BBMFL
40°	C00613WHMMW
40°	C00613BBMMW

Opt	3000K 1119 lms - 617 lmD
28°	C00613WHWFL
28°	C00613BBWFL
40°	C00613WHWMW
40°	C00613BBWMW

Finishes Painted white
 Painted black

Vos_RJ EVO

arrayLED CRI 90 | 400 mA | 14 W DC



Max inclination:
+20° with double panel
+30° with single panel



Opt	2700K 2214 lms - 1429 lmD
32°	C00640WHMML
32°	C00640BBMML
52°	C00640WHMMWF
52°	C00640BBMMWF

Opt	3000K 2318 lms - 1496 lmD
32°	C00640WHWML
32°	C00640BBWML
52°	C00640WHWMWF
52°	C00640BBWMWF

Electronics

Vos_R EVO 9W - Vos_RJ EVO 9W
99735 ON/OFF - 1 art. - Ø 48
99147 ON/OFF - 2-3 art. - Ø 64
99733 0/1-10V - 1 art. - Ø 48
C-E100012 DALI/PUSH - 1 art. - Ø 48
C-E100016 DALI/PUSH - 2-3 art. - Ø 54

Vos_R EVO 14W - Vos_RJ EVO 14W
99734 ON/OFF - 1 art. - Ø 48
99732 0/1-10V - 1 art. - Ø 48
83322 DALI/PUSH - 1 art. - Ø 48

Recessed casings

Vos_R EVO 9W / 14W
89373 For brickwork - 213x138x125
89374 For brickwork with power supply housing - 370x120

Vos_R EVO 9W - Vos_RJ EVO 9W
99849 For flush installation 77,5xh28 - Ø 48

Vos_R EVO 14W - Vos_RJ EVO 14W
83065 For flush installation 109xh12 - Ø 108

Interchangeable front elements
 page 42


Interchangeable components
 page 43



* gold Quantum EVO front element (page 42) required for installation as per image above

Quantum_R EVO


arrayLED CRI 90 | 700 mA | 9 W DC



Opt	2700K 1059 lmS - 753 lmD
☐ 31**	77322M30
☐ 46**	77322M45
Opt	3000K 1119 lmS - 796 lmD
☐ 31**	77322W30
☐ 46**	77322W45

Quantum_R EVO

arrayLED CRI 90 | 400 mA | 14 W DC



Opt	2700K 2214 lmS - 1799 lmD
☐ 32**	77326M30
☐ 54***	77326M50
Opt	3000K 2318 lmS - 1884 lmD
☐ 32**	77326W30
☐ 54***	77326W50



Corps en aluminium, diffuseur en technopolymère blanc ou noir.


Aluminium body, white technopolymer diffuser.

QUANTUM | EVO



Quantum_RJ EVO

arrayLED CRI 90 | 700 mA | 9 W DC



Max inclination:
+20°/+35°
+20° with double panel
+35° with single panel




Opt	2700K 1059 lmS - 678 lmD
30°	C00632WHMML
42°	C00632WHMMW

Opt	3000K 1119 lmS - 717 lmD
30°	C00632WHWML
42°	C00632WHWMW

Quantum_RJ EVO

arrayLED CRI 90 | 400 mA | 14 W DC



Max inclination:
+20°/+35°
+20° with double panel
+35° with single panel



Opt	2700K 2214 lmS - 1571 lmD
33°	C00644WHMML
54°	C00644WHMMW

Opt	3000K 2318 lmS - 1645 lmD
33°	C00644WHWML
54°	C00644WHWMW

Electronics

Quantum_R EVO 9W - Quantum_RJ EVO 9W

99735	ON/OFF - 1 art. - € 48
99147	ON/OFF - 2-3 art. - € 64
99733	0/1-10V - 1 art. - € 48
C-E100012	DALI/PUSH - 1 art. - € 48
C-E100016	DALI/PUSH - 2-3 art. - € 54

Quantum_R EVO 14 W - Quantum_RJ EVO 14 W

99734	ON/OFF - 1 art. - € 48
99732	0/1-10V - 1 art. - € 48
83322	DALI/PUSH - 1 art. - € 48

Recessed casings

Quantum_R EVO

89373	For brickwork - 213x138xh125
89374	For brickwork with power supply housing - 370xh120

Interchangeable front elements

page 42


Interchangeable components

page 43

Finishes ☐ Painted white




Warp_R EVO
arrayLED CRI 90 | 700 mA | 9 W DC



Opt	2700K 1059 lms - 775 lmD
31°*	77338M30
31°*	77339M30
46°**	77338M45
46°**	77339M45

Opt	3000K 1119 lms - 819 lmD
31°*	77338W30
31°*	77339W30
46°**	77338W45
46°**	77339W45


Warp_R EVO
arrayLED CRI 90 | 400 mA | 14 W DC



Opt	2700K 2214 lms - 1874 lmD
32°*	77342M30
32°*	77343M30
55°**	77342M50
55°**	77343M50

Opt	3000K 2318 lms - 1963 lmD
32°*	77342W30
32°*	77343W30
55°**	77342W50
55°**	77343W50

Warp_R Par16 EVO
220-240 V



	GU10 Max 6 W - Ø 50 mm (not included)
	C00754WHEZZ
	C00754BBEZZ



Corps en aluminium, diffuseur en technopolymère blanc ou noir.


Aluminium body, white or black technopolymer diffuser.

WARP | EVO



Warp_RJ EVO

arrayLED CRI 90 | 700 mA | 9 W DC



Max inclination:
+20° with double panel
+35° with single panel




Opt	2700K 1059 lms - 597 lmD
29°	C00258WHMML
29°	C00258BBMML
40°	C00258WHMMW
40°	C00258BBMMW

Opt	3000K 1119 lms - 631 lmD
29°	C00258WHWML
29°	C00258BBWML
40°	C00258WHWMW
40°	C00258BBWMW

Warp_RJ EVO

arrayLED CRI 90 | 400 mA | 14 W DC



Max inclination:
+20° with double panel
+35° with single panel



Opt	2700K 2214 lms - 1603 lmD
33°	C00636WHMML
33°	C00636BBMML
53°	C00636WHMMW
53°	C00636BBMMW

Opt	3000K 2318 lms - 1678 lmD
33°	C00636WHWML
33°	C00636BBWML
53°	C00636WHWMW
53°	C00636BBWMW

Electronics

Warp_R EVO 9W - Warp_RJ EVO 9W	
99735	ON/OFF - 1 art. - Ø 48
99147	ON/OFF - 2-3 art. - Ø 64
99733	0/1-10V - 1 art. - Ø 48
C-E100012	DALI/PUSH - 1 art. - Ø 48
C-E100016	DALI/PUSH - 2-3 art. - Ø 54

Warp_R EVO 14 W - Warp_RJ EVO 14 W	
99734	ON/OFF - 1 art. - Ø 48
99732	0/1-10V - 1 art. - Ø 48
83322	DALI/PUSH - 1 art. - Ø 48

Recessed casings

Warp_R EVO

89373	For brickwork - 213x138x125
89374	For brickwork with power supply housing - 370x120

Interchangeable front elements

page 42

Interchangeable components

page 43


Finishes

Painted white
Painted black



* gold Epitax EVO front element (page 42) required for installation as per image above

Epitax_R EVO
arrayLED CRI 90 | 700 mA | 9 W DC




Opt	2700K 1059 lmS - 742 lmD
30°	C00144WHMML
41°	C00144WHMMW

Opt	3000K 1119 lmS - 784 lmD
30°	C00144WHWML
41°	C00144WHWMW

Recessed casing needed: C-C100004

Epitax_R EVO
arrayLED CRI 90 | 400 mA | 14 W DC



Opt	2700K 2214 lmS - 1706 lmD
33°	C00371WHMML
55°	C00371WHMMWF

Opt	3000K 2318 lmS - 1786 lmD
33°	C00371WHWML
55°	C00371WHWMWF

Recessed casing needed: C-C100007




Corps en aluminium, diffuseur en technopolymère blanc.
Aluminium body, white technopolymer diffuser.

EPITAX | EVO



Epitax_RJ EVO

arrayLED CRI 90 | 700 mA | 9 W DC




Opt	2700K 1059 lmS - 714 lmD
30°	C00146WHMML
40°	C00146WHMMW

Opt	3000K 1119 lmS - 754 lmD
30°	C00146WHWML
40°	C00146WHWMW

Recessed casing needed: C-C100004

Epitax_RJ EVO

arrayLED CRI 90 | 400 mA | 14 W DC



Opt	2700K 2214 lmS - 1655 lmD
33°	C00373WHMML
54°	C00373WHMMWF

Opt	3000K 2318 lmS - 1733 lmD
33°	C00373WHWML
54°	C00373WHWMWF

Recessed casing needed: C-C100007

Electronics

Epitax_R EVO 9W - Epitax_RJ EVO 9W	
99735	ON/OFF - 1 art. - € 48
99147	ON/OFF - 2-3 art. - € 64
99733	0/1-10V - 1 art. - € 48
C-E100012	DALI/PUSH - 1 art. - € 48
C-E100016	DALI/PUSH - 2-3 art. - € 54

Epitax_R EVO 14W - Epitax_RJ EVO 14W	
99734	ON/OFF - 1 art. - € 48
99732	0/1-10V - 1 art. - € 48
83322	DALI/PUSH - 1 art. - € 48

Recessed casings

Epitax_R EVO 9W - Epitax_RJ EVO 9W	
C-C100004	For flush installation Ø118xh22 - € 68

Epitax_R EVO 14W - Epitax_RJ EVO 14W	
C-C100007	For flush installation Ø147xh22 - € 97

Interchangeable front elements

page 42

Interchangeable components

page 43

Interchangeable front elements

Vos EVO front elements for 4W - 9W LED modules Ø60

	 83365	Vos_R front kit Ø71
	 83366	Vos_R front kit Ø71
	 C-K400042	Vos_R front kit Ø71
	 C-K400043	Vos_R front kit Ø71
	 C-K400083	Quantum_RJ front kit Ø71
	 C-K400084	Quantum_RJ front kit Ø71
	 C-K400108	Quantum_RJ front kit Ø71
	 C-K400109	Quantum_RJ front kit Ø71

Quantum EVO front elements for 4W - 9W LED modules Ø60

	 83361	Quantum_R front kit Ø71
	 83362	Quantum_R front kit Ø71
	 C-K400038	Quantum_R front kit Ø71
	 C-K400039	Quantum_R front kit Ø71
	 C-K400087	Quantum_RJ front kit Ø71
	 C-K400088	Quantum_RJ front kit Ø71
	 C-K400110	Quantum_RJ front kit Ø71
	 C-K400111	Quantum_RJ front kit Ø71

Warp EVO front elements for 4W - 9W LED modules Ø60

	 83363	Warp_R front kit Ø71
	 83364	Warp_R front kit Ø71
	 C-K400040	Warp_R front kit Ø71
	 C-K400041	Warp_R front kit Ø71
	 C-K400081	Warp_RJ front kit Ø71
	 C-K400082	Warp_RJ front kit Ø71
	 C-K400028	Warp_RJ front kit Ø71
	 C-K400029	Warp_RJ front kit Ø71

Epitax EVO front elements for 4W - 9W LED modules Ø60

	 C-K400116	Epitax_R front kit Ø63
	 C-K400117	Epitax_R front kit Ø63
	 C-K400118	Epitax_R front kit Ø63
	 C-K400119	Epitax_R front kit Ø63
	 C-K400120	Epitax_RJ front kit Ø63
	 C-K400121	Epitax_RJ front kit Ø63
	 C-K400122	Epitax_RJ front kit Ø63
	 C-K400123	Epitax_RJ front kit Ø63

Vos EVO front elements for 9W - 14W LED modules Ø88

	 83377	Vos_R front kit Ø105
	 83378	Vos_R front kit Ø105
	 C-K400050	Vos_R front kit Ø105
	 C-K400051	Vos_R front kit Ø105
	 C-K400085	Quantum_RJ front kit Ø99
	 C-K400086	Quantum_RJ front kit Ø99
	 C-K400102	Quantum_RJ front kit Ø99
	 C-K400103	Quantum_RJ front kit Ø99

Quantum EVO front elements for 9W - 14W LED modules Ø88

	 83373	Quantum_R front kit Ø92
	 83374	Quantum_R front kit Ø92
	 C-K400046	Quantum_R front kit Ø92
	 C-K400047	Quantum_R front kit Ø92
	 C-K400089	Quantum_RJ front kit Ø99
	 C-K400090	Quantum_RJ front kit Ø99
	 C-K400104	Quantum_RJ front kit Ø99
	 C-K400105	Quantum_RJ front kit Ø99

Warp EVO front elements for 9W - 14W LED modules Ø88

	 83375	Warp_R front kit Ø99
	 83376	Warp_R front kit Ø99
	 C-K400048	Warp_R front kit Ø99
	 C-K400049	Warp_R front kit Ø99
	 C-K400091	Warp_RJ front kit Ø99
	 C-K400092	Warp_RJ front kit Ø99
	 C-K400114	Warp_RJ front kit Ø99
	 C-K400115	Warp_RJ front kit Ø99

Epitax EVO front elements for 9W - 14W LED modules Ø88

	 C-K400124	Epitax_R front kit Ø92
	 C-K400125	Epitax_R front kit Ø92
	 C-K400126	Epitax_R front kit Ø92
	 C-K400127	Epitax_R front kit Ø92
	 C-K400128	Epitax_RJ front kit Ø92
	 C-K400129	Epitax_RJ front kit Ø92
	 C-K400130	Epitax_RJ front kit Ø92
	 C-K400131	Epitax_RJ front kit Ø92

Interchangeable components between WARP, QUANTUM, VOS, EPITAX EVO

Optics kit for LED module Ø60



- 83370 Optics kit Spot (15°)
- 83371 Optics kit Medium Flood (30°)
- 83372 Optics kit Medium Flood (45°)

suitable for: 9W


Filters for LED module Ø60



- 83367 Honeycomb
- 83368 Elliptical filter
- 83369 Elliptical filter

suitable for: 4W - 9W

Adapter Ring Ø81



- 83393 Warp_R Ø 71 - Quantum_R Ø 71
- 83394 Warp_R Ø 71 - Quantum_R Ø 71
- C-K400044 Warp_R Ø 71 - Quantum_R Ø 71
- C-K400045 Warp_R Ø 71 - Quantum_R Ø 71

Optics kit for LED module Ø88



- 83382 Optics kit Flood (20°)
- 83383 Optics kit Medium Flood (30°)
- 83384 Optics kit Wide Flood (50°)

suitable for: 14W


Filters for LED module Ø88



- 83379 Honeycomb
- 83380 Elliptical filter
- 83381 Elliptical filter


suitable for: 9W - 14W

Adapter Ring Ø106



- 83391 Quantum_R Ø92
- 83392 Quantum_R Ø92
- C-K400054 Quantum_R Ø92
- C-K400055 Quantum_R Ø92

Adapter Ring Ø109



- 83395 Warp_R Ø99
- 83390 Warp_R Ø99
- C-K400052 Warp_R Ø99
- C-K400053 Warp_R Ø99







Corps en aluminium. Diffuseur en aluminium peint blanc texturé.

Aluminium body. Diffuser in white textured painted aluminium.

QUANTUM

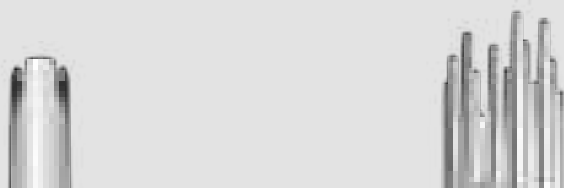


Quantum_R | V2
powerLED CRI 90
630 mA - 2 W DC | 1000 mA - 3 W DC



Opt	2W - 2700K 213 lmS - 66 lmD
	3W - 2700K 358 lmS - 119 lmD
25°	C01038WHMFL
45°	C01038WHMMW

Opt	2W - 3000K 213 lmS - 75 lmD
	3W - 3000K 402 lmS - 130 lmD
25°	C01038WHWFL
45°	C01038WHWMW

Quantum_R | V2
powerLED CRI 90
500 mA - 4,5 W DC | 700 mA - 6,3 W DC



Opt	4,5W - 2700K 544 lmS - 289 lmD
	6,3W - 2700K 715 lmS - 381 lmD
26°	C00048WHMFL
52°	C00048WHMMW

Opt	4,5W - 3000K 569 lmS - 302 lmD
	6,3W - 3000K 748 lmS - 398 lmD
26°	C00048WHWFL
52°	C00048WHWMW

Electronics

Quantum_R 2W

89147	ON/OFF - 1-2 art. - Ø 29
99376	ON/OFF - 3-6 art. - Ø 29
99105	ON/OFF - 6-12 art. - Ø 64
Converter + Driver 24V	
99710	24V DC Converter 0/1-10V
	1-6 art. - Ø 29
99713	24V DC Converter DALI
	1-6 art. - Ø 29
99374	Driver 24V DC 75W - Ø 56
99331	Driver 24V DC 150W - Ø 70

Quantum_R 3W

C-E100046	ON/OFF - 1-6 art. - Ø 48
C-E100047	DALI - 1-3 art. - Ø 40
C-E100033	ON/OFF - 4-12 art. - Ø 50
C-E100034	DALI/PUSH - 4-12 art. - Ø 50

Quantum_R 4,5W

89146	ON/OFF - 1 art. - Ø 29
99377	ON/OFF - 1-2 art. - Ø 64
C-E100004	0/1-10V - 1 art. - Ø 31
C-E100005	DALI/PUSH - 1 art. - Ø 31
C-E100001	DALI/PUSH - 1-2 art. - Ø 54

Quantum_R 6,3W

99735	ON/OFF - 1 art. - Ø 48
99147	ON/OFF - 2-3 art. - Ø 64
99733	0/1-10V - 1 art. - Ø 48
83323	DALI/PUSH - 1 art. - Ø 48
C-E100016	DALI/PUSH - 2-4 art. - Ø 54

Finishes ☐ Text white R9003







Corps en aluminium. Diffuseur en aluminium peint blanc texturé.

Aluminium body. Diffuser in white textured painted aluminium.

WARP

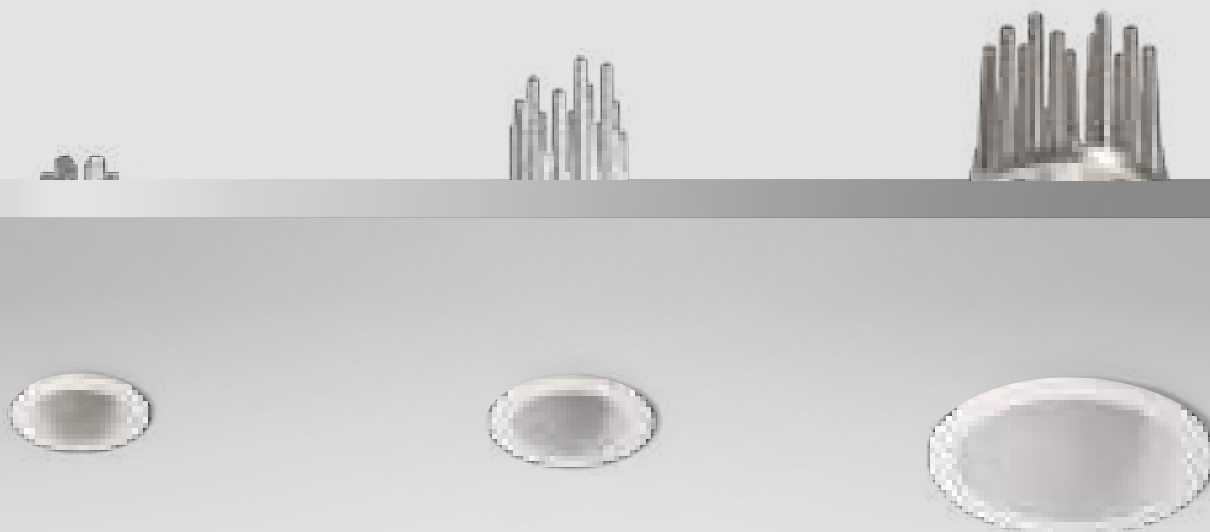


Warp_R | V2
powerLED CRI 90
630 mA - 2 W DC | 1000 mA - 3 W DC



Opt 2W - 2700K 199 lmS - 101 lmD
3W - 2700K 358 lmS - 149 lmD
25° **C01041WHMFL**

Opt 2W - 3000K 212 lmS - 108 lmD
3W - 3000K 402 lmS - 163 lmD
25° **C01041WHWFL**


Warp_R | V2
powerLED CRI 90
500 mA - 4,5 W DC | 700 mA - 6,3 W DC



Opt 4,5W - 2700K 544 lmS - 309 lmD
6,3W - 2700K 715 lmS - 407 lmD
28° **C00052WHMFL**
50° **C00052WHMWF**

Opt 4,5W - 3000K 569 lmS - 323 lmD
6,3W - 3000K 748 lmS - 425 lmD
28° **C00052WHWFL**
50° **C00052WHWWF**

Warp_R
powerLED CRI 90 | 800 mA | 10 W DC



Opt 2700K 960 lmS - 694 lmD
27°* **90762M30**
39° **90762M60**

Opt 3000K 1034 lmS - 747 lmD
27°* **90762W30**
39° **90762W60**

Electronics

Warp_R 2W

89147 ON/OFF - 1-2 art. - 29
99376 ON/OFF - 3-6 art. - 29
99105 ON/OFF - 6-12 art. - 64
Converter + Driver 24 V
99710 24V DC Converter 0/1-10V
1-6 art. - 29
99713 24V DC Converter DALI
1-6 art. - 29
99374 Driver 24V DC 75W - 56
99331 Driver 24V DC 150W - 70

Warp_R 3W

C-E100046 ON/OFF - 1-6 art. - 48
C-E100033 ON/OFF - 4-12 art. - 50
C-E100047 DALI - 1-3 art. - 40
C-E100034 DALI/PUSH - 4-12 art. - 50

Warp_R 4,5W

89146 ON/OFF - 1 art. - 29
99377 ON/OFF - 1-2 art. - 64
C-E100004 0/1-10V - 1 art. - 31
C-E100005 DALI/PUSH - 1 art. - 31
C-E100001 DALI/PUSH - 1-2 art. - 54

Warp_R 6,3W

99147 ON/OFF - 2-3 art. - 64
99735 ON/OFF - 1 art. - 48
99733 0/1-10V - 1 art. - 48
83323 DALI/PUSH - 1 art. - 48
C-E100016 DALI/PUSH - 2-4 art. - 54

Warp_R 10W


99135 ON/OFF - 2-3 art. - 64
99735 ON/OFF - 1 art. - 48
99733 0/1-10V - 1 art. - 48
C-E100013 DALI/PUSH - 1 art. - 31
99345 DALI/PUSH - 1-3 art. - 56

Finishes ☐ Text white R9003






Corps en aluminium. Diffuseur en aluminium peint blanc texturé.
Aluminium body. Diffuser in white textured painted aluminium.



Epitax peut être encastré à fleur ou
extrait en position semi-encastrée même
après l'installation.
*Epitax can be flush-mounted or extracted
to a semi-recessed position even after
installation.*

Epitax | V2
powerLED CRI 90
500 mA - 4,5 W DC | 700 mA - 6,3 W DC



Opt	4,5W - 2700K 544 lmS - 302 lmD
Opt	6,3W - 2700K 715 lmS - 397 lmD
28°	C00058WHMFL
51°	C00058WHMWF
Opt	4,5W - 3000K 569 lmS - 316 lmD
Opt	6,3W - 3000K 748 lmS - 416 lmD
28°	C00058WHWFL
51°	C00058WHWWF

Electronics

Epitax 4,5W	
89146	ON/OFF - 1 art. - € 29
99377	ON/OFF - 1-2 art. - € 64
C-E100004	0/1-10V - 1 art. - € 31
C-E100005	DALI/PUSH - 1 art. - € 31
C-E100001	DALI/PUSH - 1-2 art. - € 54

Epitax 6,3W	
99735	ON/OFF - 1 art. - € 48
99147	ON/OFF - 2-3 art. - € 64
99733	0/1-10V - 1 art. - € 48
83323	DALI/PUSH - 1 art. - € 48
C-E100016	DALI/PUSH - 2-4 art. - € 54

Recessed casings

C-C100006	For flush installation Ø50xh28 - € 40
98530	With flange - Ø48xh28 - € 40






Corps en aluminium. Diffuseur en aluminium peint blanc texturé.
Aluminium body. Diffuser in white textured painted aluminium



Loro_R
arrayLED CRI 90
220 mA - 8 W DC | 350 mA - 12,5 W DC



Opt	8W - 2700K 1098 lmS - 793 lmD 12,5W - 2700K 1644 lmS - 1394 lmD
23°	91749M30
46°	91749M60

Opt	8W - 3000K 1139 lmS - 822 lmD 12,5W - 3000K 1705 lmS - 1446 lmD
23°	91749W30
46°	91749W60

Electronics

Loro_R 8W	
99198	ON/OFF - 1 art. - ⌘ 48
99732	0/1-10V - 1 art. - ⌘ 48
83322	DALI/PUSH - 1 art. - ⌘ 48

Loro_R 12,5W	
99375	ON/OFF - 1 art. - ⌘ 29
99115	0/1-10V - 1 art. - ⌘ 56
83322	DALI/PUSH - 1 art. - ⌘ 48






Corps en aluminium. Diffuseur en aluminium peint blanc ou noir texturé.

Aluminium body and diffuser. White or black textured painted finish.

COB40



Cob40_R


arrayLED CRI 90 | 700 mA | 6,5 W DC



Opt	3000K 748 lmS - 606 lmD
21°*	C00174WHWFL
21°*	C00174BBWFL
54°	C00174WHWWF
54°	C00174BBWWF

Cob40_RJ

arrayLED CRI 90 | 700 mA | 6,5 W DC



Opt	3000K 748 lmS - 606 lmD
21°	C00176WHWFL
21°	C00176BBWFL
54°	C00176WHWWF
54°	C00176BBWWF

Electronics

Cob40_R - Cob40_RJ	
99735	ON/OFF - 1 art. - Ø 48
99147	ON/OFF - 2-3 art. - Ø 64
99733	0/1-10V - 1 art. - Ø 48
83323	DALI/PUSH - 1 art. - Ø 48
C-E100016	DALI/PUSH - 2-4 art. - Ø 54

Recessed casings

Cob40_R - Cob40_RJ	
89373	For brickwork - 213x138xh125
89374	For brickwork with power supply housing - 370xh120

Accessories


Cob40_R - Cob40_RJ	
99888	Ring
99889	Ring
99890	Ring
99899	Ring

Finishes	Text White R9003	Painted White	Painted copper
	Text Black R9005	Painted gold	Painted chrome



COB44_R

arrayLED CRI 90 | 700 mA | 6,5 W DC



Opt	2700K 715 lmS - 580 lmD
20°	C00177WHMFL
20°	C00177BBMFL
52°	C00177WHMWF
52°	C00177BBMWF

Opt	3000K 748 lmS - 607 lmD
20°	C00177WHWFL
20°	C00177BBWFL
52°	C00177WHWWF
52°	C00177BBWWF

Opt	4000K 805 lmS - 653 lmD
20°	C00177WHNFL
52°	C00177WHNWF



Corps en aluminium. Flange en polycarbonate blanc ou noir.


Aluminium body. White or black polycarbonate flange.

COB44



COB44_R

arrayLED CRI 90 | 300 mA | 11 W DC




Opt	2700K 1487 lmS - 909 lmD
21°	C00178WHMFL
21°	C00178BBMFL
52°	C00178WHMWF
52°	C00178BBMWF

Opt	3000K 1578 lmS - 965 lmD
21°	C00178WHWFL
21°	C00178BBWFL
52°	C00178WHWWF
52°	C00178BBWWF

Opt	4000K 1660 lmS - 1015 lmD
21°	C00178WHNFL
52°	C00178WHNWF

COB44_RJ

arrayLED CRI 90 | 700 mA | 6,5 W DC




Opt	2700K 715 lmS - 580 lmD
20°	C00179WHMFL
20°	C00179BBMFL
52°	C00179WHMWF
52°	C00179BBMWF

Opt	3000K 748 lmS - 607 lmD
20°	C00179WHWFL
20°	C00179BBWFL
52°	C00179WHWWF
52°	C00179BBWWF

Opt	4000K 805 lmS - 653 lmD
20°	C00179WHNFL
20°	C00179BBNFL
52°	C00179WHNWF
52°	C00179BBNWF

COB44_RJ

arrayLED CRI 90 | 300 mA | 11 W DC



Opt	2700K 1487 lmS - 909 lmD
21°	C00180WHMFL
21°	C00180BBMFL
52°	C00180WHMWF
52°	C00180BBMWF

Opt	3000K 1578 lmS - 965 lmD
21°	C00180WHWFL
21°	C00180BBWFL
52°	C00180WHWWF
52°	C00180BBWWF

Opt	4000K 1660 lmS - 1015 lmD
21°	C00180WHNFL
21°	C00180BBNFL
52°	C00180WHNWF
52°	C00180BBNWF

Electronics

COB44_R - RJ

99735	ON/OFF - 1 art. - Ø 48
99147	ON/OFF - 2-3 art. - Ø 64
99733	0/1-10V - 1 art. - Ø 48
83323	DALI/PUSH - 1 art. - Ø 48
C-E100016	DALI/PUSH - 2-4 art. - Ø 54

COB44_R - RJ

99734	ON/OFF - 1 art. - Ø 48
99732	0/1-10V - 1 art. - Ø 48
83322	DALI/PUSH - 1 art. - Ø 48

Finishes Painted white
 Painted black





Corps en aluminium. Flange en polycarbonate blanc ou noir.

Aluminium body. White or black polycarbonate flange.

COB44



COB44_Q

arrayLED CRI 90 | 700 mA | 6,5 W DC



Opt	3000K 748 lmS - 607 lmD
20°	C00181WHWFL
52°	C00181WHWWF

COB44_QJ

arrayLED CRI 90 | 700 mA | 6,5 W DC



Opt	3000K 748 lmS - 607 lmD
21°	C00183WHWFL
52°	C00183WHWWF

COB44_Q

arrayLED CRI 90 | 300 mA | 11 W DC



Opt	3000K 1578 lmS - 965 lmD
21°	C00182WHWFL
52°	C00182WHWWF

COB44_QJ

arrayLED CRI 90 | 300 mA | 11 W DC



Opt	3000K 1578 lmS - 965 lmD
21°	C00184WHWFL
52°	C00184WHWWF

Electronics

COB44_Q - QJ 6,5W

99735	ON/OFF - 1 art. - Ø 48
99147	ON/OFF - 2-3 art. - Ø 64
99733	0/1-10V - 1 art. - Ø 48
83323	DALI/PUSH - 1 art. - Ø 48
C-E100016	DALI/PUSH - 2-4 art. - Ø 54

COB44_Q - QJ 11W

99734	ON/OFF - 1 art. - Ø 48
99732	0/1-10V - 1 art. - Ø 48
83322	DALI/PUSH - 1 art. - Ø 48

Finishes Painted white
 Painted black







Corps en aluminium. Diffuseur en aluminium peint blanc texturé.

Aluminium body. Diffuser in white textured painted aluminium

WOOFER





Woofer_R | V2
arrayLED CRI 90 | 350 mA | 12,5 W DC





Opt	3000K 2235 lmS - 1620 lmD
62°	C00406WHWWF
Opt	4000K 2266 lmS - 1665 lmD
62°	C00406WHNWF

Woofer_R | V2
arrayLED CRI 90 | 500 mA | 18 W DC



Opt	3000K 2869 lmS - 2082 lmD
60°	C00407WHWWF
Opt	4000K 2982 lmS - 2173 lmD
60°	C00407WHNWF

Woofer_R | V2
arrayLED CRI 90 | 700 mA | 25 W DC



Opt	3000K 4007 lmS - 2869 lmD
57°	C00409WHWWF
Opt	4000K 4225 lmS - 3029 lmD
57°	C00409WHNWF

Electronics

Woofer_R 12,5W	
99375	ON/OFF - 1 art. - ⌚ 29
99115	0/1-10V - 1 art. - ⌚ 56
83322	DALI/PUSH - 1 art. - ⌚ 48

Woofer_R 18W	
99106	ON/OFF - 1 art. - ⌚ 64
99115	0/1-10V - 1 art. - ⌚ 56
C-E100001	DALI/PUSH - 1 art. - ⌚ 54

Woofer_R 25W	
99147	ON/OFF - 1 art. - ⌚ 64
83008	0/1-10V - DALI/PUSH - 1 art. - ⌚ 84
C-E100016	DALI/PUSH - 1 art. - ⌚ 54





CELL



Corps en aluminium peint blanc et compartiment optique en matériau plastique (Pom-C) blanc, ou corps en aluminium peint noir avec compartiment optique entièrement noir.

Aluminium body in white wrinkled painted finish with optical compartment in white plastic material (Pom-C), or black wrinkled painted aluminium body with total black optical compartment.



Cell



powerLED CRI 90 | 630 mA | 6 W DC



Opt	3000K 639 lmS - 557 lmD
33°	C00150WHWML
33°	C00150BBWML

Cell

powerLED CRI 90 | 630 mA | 12 W DC



Opt	3000K 1278 lmS - 1157 lmD
34°	C00152WHWML
34°	C00152BBWML

Electronics

Cell 6W	
99376	ON/OFF - 1-2 art. - Ø 29
99105	ON/OFF - 2-4 art. - Ø 64
99115	0/1-10V - 1-3 art. - Ø 56
C-E100001	DALI/PUSH - 2-4 art. - Ø 54

Cell 12W	
99129	ON/OFF - 1 art. - Ø 48
99105	ON/OFF - 1-2 art. - Ø 64
99115	0/1-10V - 1 art. - Ø 56
C-E100001	DALI/PUSH - 1-2 art. - Ø 54






Base en plâtre peinturable. Compartiment optique en matériau plastique (Pom-C) blanc ou noir.


Paintable plaster base. Optical compartment in white or black plastic material (Pom-C).

GYPSUM CELL



Gypsum Cell


powerLED CRI 90 | 630 mA | 6 W DC



Opt	3000K 636 lmS - 540 lmD
33°	64547W30
33°	64546W30

Gypsum Cell

powerLED CRI 90 | 630 mA | 12 W DC



Opt	3000K 1272 lmS - 1080 lmD
34°	64549W30
34°	64548W30

Electronics

Gypsum Cell 6 W

99376	ON/OFF - 1-2 art. - Ø 29
99105	ON/OFF - 2-4 art. - Ø 64
99115	0/1-10V - 1-3 art. - Ø 56
C-E100001	DALI/PUSH - 2-4 art. - Ø 54

Gypsum Cell 12 W

99129	ON/OFF - 1 art. - Ø 48
99105	ON/OFF - 1-2 art. - Ø 64
99115	0/1-10V - 1 art. - Ø 56
C-E100001	DALI/PUSH - 1-2 art. - Ø 54

Accessories

60830	Spacer 100x19 mm
-------	------------------

Finishes ☐ White Gypsum + ☐ Plastic white
☐ White Gypsum + ☒ Plastic black





Base en plâtre peinturable.
Anneaux interchangeables en ABS peint.

Paintable plaster base.
Interchangeable painted ABS rings.


GYPSUM COLORING



137




Gypsum Coloring_R1 | V2
powerLED CRI 90 | 220-240 V
6 W DC - 8 W AC



Opt 2700K 761 lmS - 555 lmD
 24° CA029AWHMFL
 42° CA029AWHMMW

Opt 3000K 794 lmS - 591 lmD
 24° CA029AWHWFL
 42° CA029AWHWMW


Gypsum Coloring_R1 | V2
powerLED CRI 90 | 220-240 V
9 W DC - 12 W AC



Opt 2700K 992 lmS - 793 lmD
 24° CA030AWHMFL
 42° CA030AWHMMW

Opt 3000K 1049 lmS - 843 lmD
 24° CA030AWHWFL
 42° CA030AWHWMW

Gypsum Coloring_R1 | V2
powerLED CRI 90 | 24 V
9 W DC



Opt 2700K 992 lmS - 768 lmD
 24° CA030JWHMFL
 42° CA030JWHMMW

Opt 3000K 1049 lmS - 817 lmD
 24° CA030JWHWFL
 42° CA030JWHWMW

Electronics

Gypsum Coloring_R1 9W 24V
KIT0097 DALI/0/1-10V/PUSH - 1-9 art. - 25


Accessories included

Screwdriver/extractor
 White round ring (1x)
 Black round ring (1x)
 Painted Gold round ring (1x)
 Painted Copper round ring (1x)



* Installation info

Gypsum Coloring_R1
 with included driver
 minimum space
 required



Finishes White Gypsum Painted white Painted gold
 Painted black Painted cCopper





Base en plâtre peinturable.
Anneaux interchangeables en ABS peint.

Paintable plaster base.
Interchangeable painted ABS rings.


GYPSUM COLORING



137




Gypsum Coloring_Q1 | V2
powerLED CRI 90 | 220-240 V
6 W DC - 8 W AC




Opt	2700K 761 lmS - 555 lmD
24°	CA031AWHMFL
42°	CA031AWHMMW
Opt	3000K 794 lmS - 591 lmD
24°	CA031AWHWFL
42°	CA031AWHWMW

Gypsum Coloring_Q1 | V2
powerLED CRI 90 | 220-240 V
9 W DC - 12 W AC



Opt	2700K 992 lmS - 793 lmD
24°	CA032AWHMFL
42°	CA032AWHMMW
Opt	3000K 1049 lmS - 843 lmD
24°	CA032AWHWFL
42°	CA032AWHWMW

Gypsum Coloring_Q1 | V2
powerLED CRI 90 | 24 V
9 W DC



Opt	2700K 992 lmS - 768 lmD
24°	CA032JWHMFL
42°	CA032JWHMMW
Opt	3000K 1049 lmS - 817 lmD
24°	CA032JWHWFL
42°	CA032JWHWMW

Electronics

Gypsum Coloring_Q1 9W 24V
KIT0097 DALI/0/1-10V/PUSH - 1-9 art. - Ⓢ 25


Accessories included

Screwdriver/extractor
 White square ring (1x)
 Black square ring (1x)
 Painted Gold square ring (1x)
 Painted Copper square ring (1x)



* Installation info

Gypsum Coloring_Q1
with included driver
minimum space
required



Finishes White Gypsum Painted white Painted black Painted gold Painted copper





Base en plâtre peinturable.
Anneaux interchangeables en ABS peint.

Paintable plaster base.
Interchangeable painted ABS rings.


GYPSUM COLORING



137



Gypsum Coloring_R2 | V2
powerLED CRI 90 | 220-240 V
13 W DC - 15 W AC

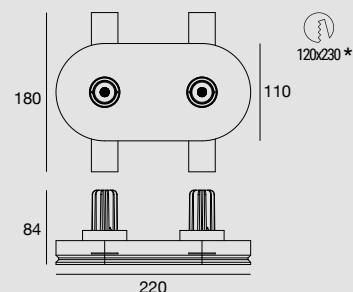

Opt	2700K 1522 lmS - 1142 lmD
24°	CA033AWHMFL
42°	CA033AWHMMW
Opt	3000K 1588 lmS - 1215 lmD
24°	CA033AWHWFL
42°	CA033AWHWMW


Accessories included

Screwdriver/extractor
 White round ring (2x)
 Black round ring (2x)
 Painted Gold round ring (2x)
 Painted Copper round ring (2x)



* Installation info

Gypsum Coloring_R2
with included
drivers - minimum
space required



Finishes White Gypsum Painted white Painted black Painted gold Painted cCopper






Base en plâtre peinturable.
Anneaux interchangeables en ABS peint.
*Paintable plaster base.
Interchangeable painted ABS rings.*


GYPSUM COLORING



137

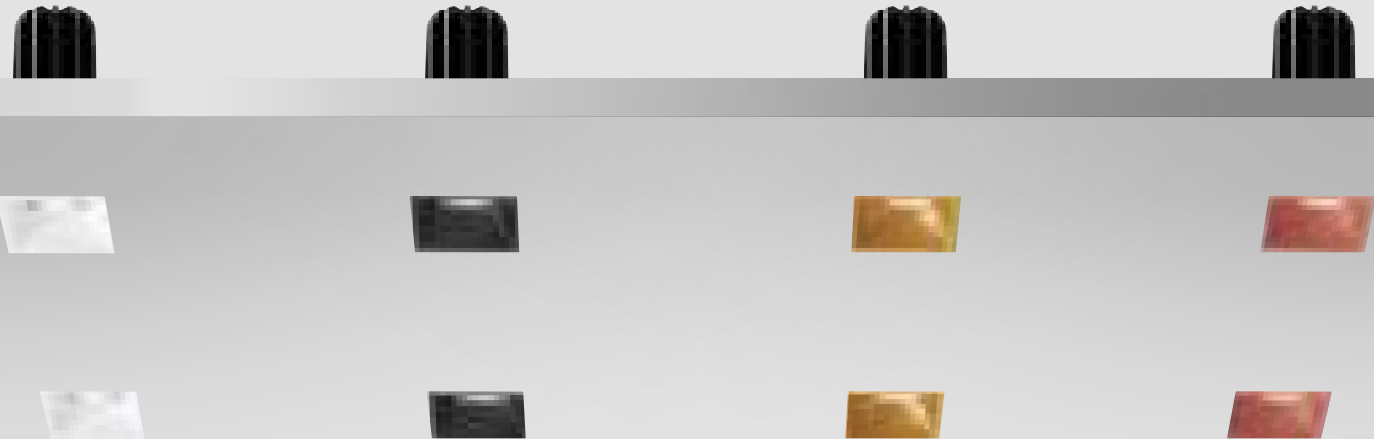

Gypsum Coloring_Q2 | V2
powerLED CRI 90 | 220-240 V
13 W DC - 15 W AC




Opt	2700K 1522 lmS - 1142 lmD
24°	CA034AWHMFL
42°	CA034AWHMMW
Opt	3000K 1588 lmS - 1215 lmD
24°	CA034AWHWFL
42°	CA034AWHMMW

Accessories included

- Screwdriver/extractor
- White square ring (2x)
 - Black square ring (2x)
 - Painted Gold square ring (2x)
 - Painted Copper square ring (2x)
-

*** Installation info**

Gypsum Coloring_Q2
with included
drivers - minimum
space required



Finishes

White Gypsum	Painted white	Painted gold
	Painted black	Painted copper





Base en plâtre peinturable.
Différentes variantes esthétiques disponibles.

Paintable plaster base.
Various aesthetic variants available.


GYPSUM



387 427

Gypsum_Eye


arrayLED CRI 90 | 7 W DC | 700 mA



Opt	2700K 715 lmS - 474 lmD
DI	8867M
	3000K 748 lmS - 511 lmD
DI	8867

Gypsum_0


arrayLED CRI 90 | 7 W DC | 700 mA



Opt	2700K 715 lmS - 422 lmD
DI	8861M
	3000K 748 lmS - 455 lmD
DI	8861

Gypsum_R

arrayLED CRI 90 | 7 W DC | 700 mA



Opt	2700K 715 lmS - 357 lmD
DI	8866M
	3000K 748 lmS - 385 lmD
DI	8866



GU10 Max 7 W LED Bulb
(not included)

8875

Electronics

Gypsum_Eye - Gypsum_0 - Gypsum_R	
99243	ON/OFF - 1 art. - € 44
99147	ON/OFF - 1-3 art. - € 64
99115	0/1-10V / PUSH - 1-3 art. - € 56
C-E100010	0/1-10V - 3-4 art. - € 31
C-E100011	DALI/PUSH - 3-4 art. - € 31

Accessories

Gypsum_Eye - Gypsum_0 - Gypsum_R	
60830	Spacer 100x19 mm
Gypsum_R	
60860	Glass





Base en plâtre peinturable.
Différentes variantes esthétiques disponibles.


Paintable plaster base.
Various aesthetic variants available.

GYPSUM



Gypsum_QD


arrayLED CRI 90 | 8 W DC | 220 mA



Opt	2700K 1157 lmS - 716 lmD
15°	63830M00
	3000K 1228 lmS - 765 lmD
15°	63830W00

Gypsum_QC

arrayLED CRI 90 | 7 W DC | 700 mA




Opt	2700K 715 lmS - 424 lmD
15°	8865M
	3000K 748 lmS - 456 lmD
15°	8865



	GU10 Max 7 W LED Bulb (not included)
	8876

Gypsum_QRD

arrayLED CRI 90 | 7 W DC | 700 mA



Opt	2700K 715 lmS - 424 lmD
15°	8870M
	3000K 748 lmS - 456 lmD
15°	8870



	GU10 Max 7 W LED Bulb (not included)
	8877

Electronics

Gypsum_QD

99198	ON/OFF - 1 art. - € 48
99732	0/1-10V / PUSH - 1 art. - € 48
83322	DALI/PUSH - 1 art. - € 48

Gypsum_QC - Gypsum_QRD

99243	ON/OFF - 1 art. - € 44
99147	ON/OFF - 1-3 art. - € 64
99115	0/1-10V / PUSH - 1-3 art. - € 56
C-E100010	0/1-10V - 3-4 art. - € 31
C-E100011	DALI/PUSH - 3-4 art. - € 31

Accessories


Gypsum_QD - Gypsum_QC - Gypsum_QRD	
60830	Spacer 100x19 mm

Gypsum_QC - Gypsum_QRD	
60840	Glass

ILLUMINATOR

Illuminator est une série d'encastrés pour faux plafond, disponibles en formats d'un, deux ou trois modules orientables. Les boîtiers encastrables orientables accueillent différents types d'appareils Illuminator, selon l'optique choisie.

Illuminator is a series of recessed ceiling luminaires, available in formats of one, two or three swivelling modules. The adjustable countercases accommodate various types of Illuminator luminaires, depending on the optics chosen.

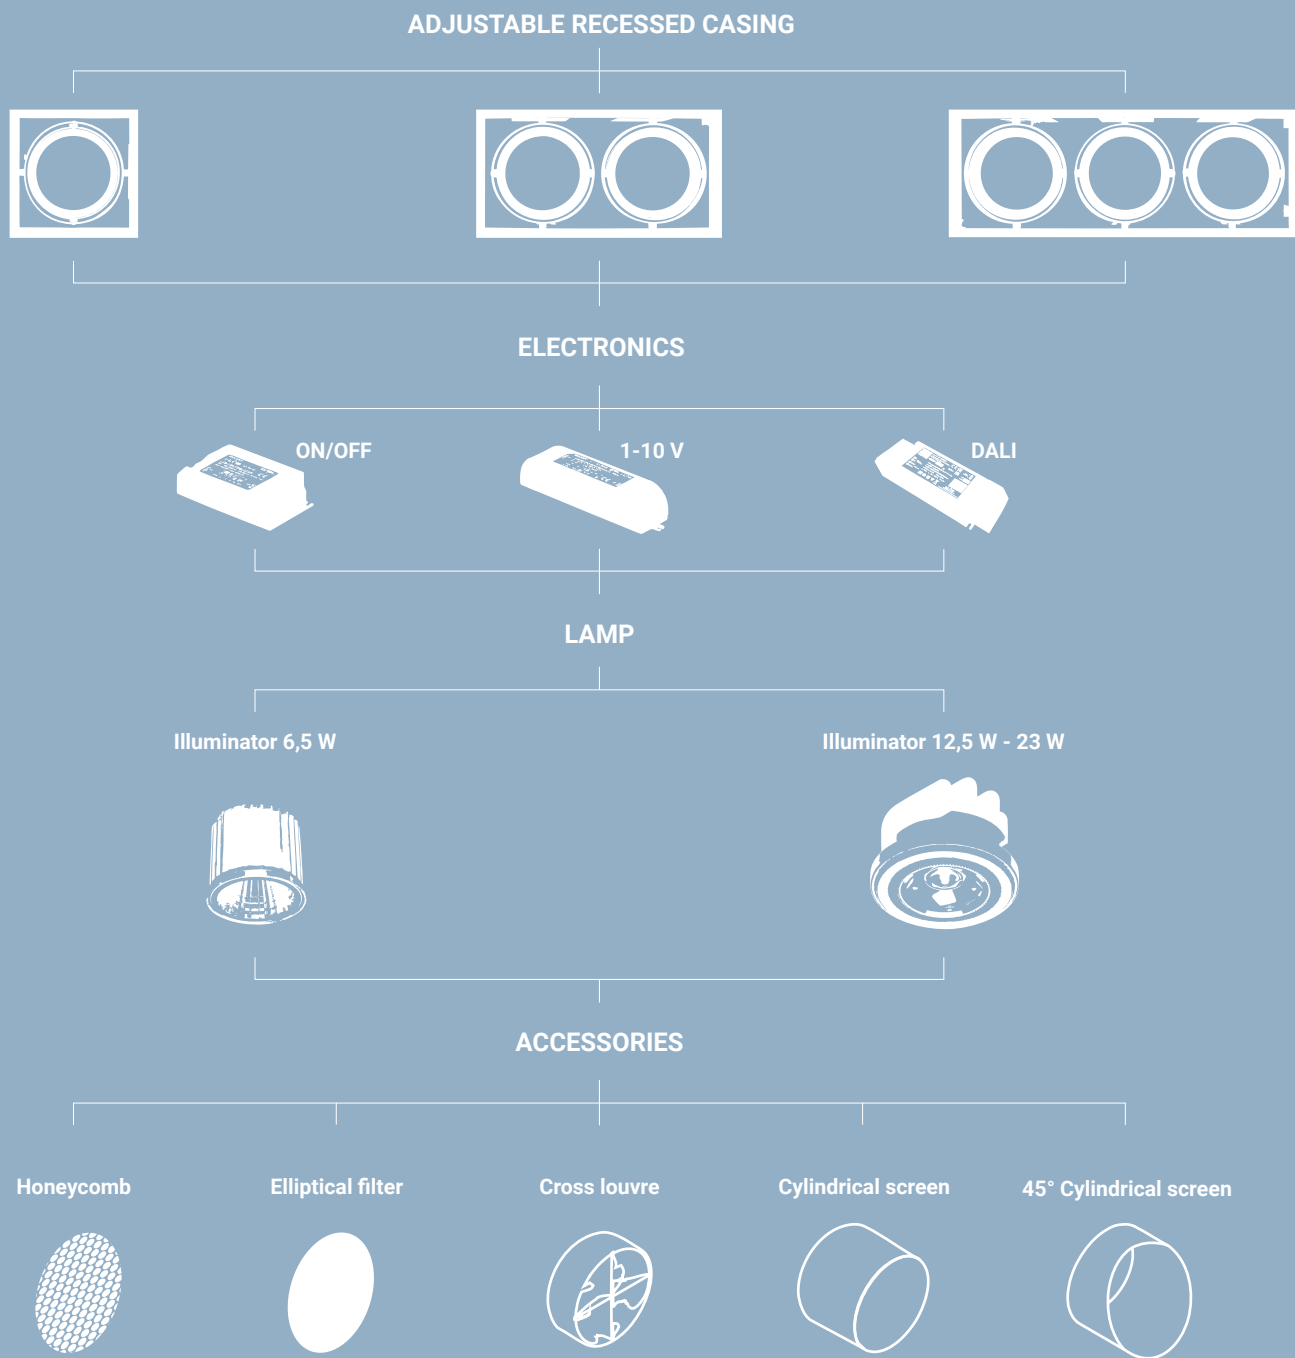



ILLUMINATOR

Case ad incasso in alluminio verniciato bianco o nero texturizzato.
Proiettore in alluminio.

*Recessed case in white or black textured painted aluminium.
Projector in aluminium.*



Illuminator


arrayLED | 700 mA | 6,5 W DC



Opt	3000K 748 lmS - 677 lmD
26°	80338W30
52°	80338W60

Illuminator


adjustable recessed casing



1 x lamp	
99485	
99488	

Illuminator


adjustable recessed casing



2 x lamp	
99486	
99489	

Illuminator

adjustable recessed casing



3 x lamp	
99487	
99490	

Electronics

99735	ON/OFF - 1 art. - Ø 48
99147	ON/OFF - 2-3 art. - Ø 64
99733	0/1-10V - 1 art. - Ø 48
83323	DALI/PUSH - 1 art. - Ø 48
C-E100016	DALI/PUSH - 2-4 art. - Ø 54

Accessories

99550	Honeycomb
99552	Elliptical filter
99554	Cylindrical screen

Finishes	Text white R9003	Anodised Aluminium
	Text black R9005	






Boîtier encastrable en aluminium peint blanc ou noir texturé.
Projecteur en aluminium peint blanc ou noir texturé.

*Recessed case in white or black textured painted aluminium.
Projector in white or black textured painted aluminium.*

ILLUMINATOR




Illuminator | V2
arrayLED CRI 90
350 mA - 12,5 W DC | 630 mA - 23 W DC




Opt	12,5W - 3000K 1837 lmS - 1488 lmD
	23W - 3000K 3384 lmS - 2750 lmD
39°	C00400WHWML
39°	C00400BBWML
50°	C00400WHWWF
50°	C00400BBWWF

Illuminator
adjustable recessed casing




2 x lamp	
99498	
99501	

Illuminator
adjustable recessed casing



1 x lamp	
99497	
99500	

Illuminator
adjustable recessed casing



3 x lamp	
99499	
99502	

Finishes Text white R9003
 Text black R9005

Electronics

Illuminator 12,5W	
99375	ON/OFF - 1 art. - ⌀ 29
99115	0/1-10V - 1 art. - ⌀ 56
83322	DALI/PUSH - 1 art. - ⌀ 54

Illuminator 23W	
99105	ON/OFF - 1 art. - ⌀ 64
99115	0/1-10V - 1 art. - ⌀ 56
C-E100001	DALI/PUSH - 1 art. - ⌀ 54

Accessories

C-U300007	Elliptical filter
C-U300008	Honeycomb
C-U300009	Spot lens kit (15°)
C-U300010	Medium Flood lens kit (30°)
C-U300011	Wide Flood lens kit (45°)
C-U300029	Cylindrical screen
C-U300030	45° Cylindrical screen
C-U300031	Cross louvre





Diffuseur en polyméthacrylate de méthyle sablé.
Monture en aluminium peint blanc texturé.

Sandblasted polymethylmethacrylate diffuser.
White textured painted aluminium frame.

ONE TO ONE




101



One to one_C

topLED CRI 90 | 8 W DC | 500 mA



Opt	2700K	1007 lmS - 763 lmD
DI		7619M
Opt	3000K	1082 lmS - 820 lmD
DI		7619

Electronics

KIT0064	PHASE-CUT - 1 art. - ⌀ 45
KIT0065	PHASE-CUT - 1-2 art. - ⌀ 49




Corps en aluminium peint blanc texturé.
Lentille en verre transparent.

*Body in white textured painted aluminium.
Lens in clear glass.*



OUTLOOK




103 237



Outlook_C

arrayLED CRI 90 | 500 mA | 9 W DC



Optical compartment
rotation: 360°
tilt: ±30°



Opt	2700K 1081 lmS - 763 lmD
DI	8470M
Opt	3000K 1162 lmS - 820 lmD
DI	8470

Electronics

KIT0064	PHASE-CUT - 1 art. - ⌀ 45
KIT0065	PHASE-CUT - 1-2 art. - ⌀ 49







Corps en laiton poli, aluminium poli ou aluminium peint blanc avec effet texturé. Flange en métal peint blanc texturé.

Body in polished brass, polished or white textured painted aluminium. White textured painted metal flange.

BIRBA



Birba_C
220-240 V



GU10 Max 7 W LED Bulb
(not included)



9451
9453
9454





Corps en aluminium peint texturé dans les couleurs blanc, noir, pêche, pétrole et bleu profond.

Textured painted aluminium body in white, black, peach, petrol and deep blue.


STILO



118 303

**Stilo_C**

topLED CRI 90 | 220-240 V
13 W DC - 15 W AC




Opt	2700K 1563 lmS - 1432 lmD
DI	CA064DWHMDI
DI	CA064DBBMDI
DI	CA064DBEMDI
DI	CA064DGBMDI
DI	CA064DLUMDI

Opt	3000K 1645 lmS - 1507 lmD
DI	CA064DWHWDI
DI	CA064DBBWDI
DI	CA064DBEWDI
DI	CA064DGBWDI
DI	CA064DLUWDI

Stilo_C

topLED CRI 90 | 220-240 V
21 W DC - 24 W AC




Opt	2700K 2654 lmS - 2420 lmD
DI	CA065DWHMDI
DI	CA065DBBMDI
DI	CA065DBEMDI
DI	CA065DGBMDI
DI	CA065DLUMDI

Opt	3000K 2794 lmS - 2547 lmD
DI	CA065DWHWDI
DI	CA065DBBWDI
DI	CA065DBEWDI
DI	CA065DGBWDI
DI	CA065DLUWDI

Stilo_C

topLED CRI 90 | 220-240 V
36 W DC - 40 W AC



Opt	2700K 4536 lmS - 4391 lmD
DI	CA066DWHMDI
DI	CA066DBBMDI
DI	CA066DBEMDI
DI	CA066DGBMDI
DI	CA066DLUMDI

Opt	3000K 4775 lmS - 4622 lmD
DI	CA066DWHWDI
DI	CA066DBBWDI
DI	CA066DBEWDI
DI	CA066DGBWDI
DI	CA066DLUWDI

* DIMMER REQUIRED. Find it in "Electronics".


Electronics

KIT0026 Phase-cut dimmer - 100 W
KIT0080 Phase-cut CASAMBI dim - 1 art.

Finishes Text white R9003 Text peach R3012 Text deep blue R5011
 Text black R9005 Text petrol R6004

INDOOR

BATON	91
BIRBA	93
EMY	95
BOX	97
SATORI	99
ONE TO ONE	101
OUTLOOK	103
SINFONIA	105
CRUMB	107
OH!	109
OH! SMASH	111
GEMINI	113
GEMINI PAINT	115
HORIZON	117
STILO	119
DELFI	123
CRISTALBOLLA	127
JOINT	131



CEILING






BATON

Corps en aluminium peint texturé blanc ou noir avec groupe optique interne assorti, ou noir avec intérieur en or brossé. Diffuseur en verre extra-clair transparent.

White or black textured painted aluminium body with matching interior light unit, or black with brushed gold interior. Transparent extra-clear glass diffuser.




Baton_R
arrayLED CRI 90 | 220-240 V
7,3 W DC - 9 W AC



Opt	3000K 1133 lmS - 765 lmD
55°	84581W50
55°	76084W50
55°	76085W50

Baton_Q
arrayLED CRI 90 | 220-240 V
7,3 W DC - 9 W AC




Opt	3000K 1133 lmS - 765 lmD
55°	84584W50
55°	76086W50
55°	76087W50





BIRBA



85 235 363

Corps en laiton poli, aluminium poli ou aluminium peint texturé blanc.

Body in polished brass, polished aluminium or textured white painted aluminium.



Birba_S
220-240 V



	GU10 Max 7 W LED Bulb (not included)
	9373
	9375
	9376

Birba_S
220-240 V



	GU10 Max 7 W LED Bulb (not included)
	9379
	9381
	9382

Birba_S
220-240 V



	GU10 Max 7 W LED Bulb (not included)
	9385
	9387
	9388






EMY


Corps en aluminium peint blanc. Diffuseur en PMMA microprismatique.

White painted aluminium body. Diffuser in microprismatic PMMA.

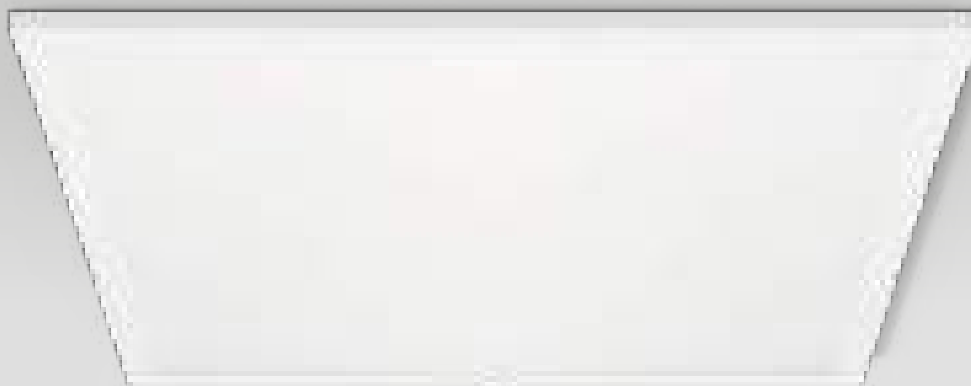

Emy | V2

topLED CRI 90 | 1200 mA | 40 W DC



Opt | 3000K 4400 lmS - 3569 lmD
 DI | **C01130WSWDI**

Opt | 4000K 4400 lmS - 4007 lmD
 DI | **C01130WSNDI**

Emy | V2

topLED CRI 90 | 1200 mA | 40 W DC



Opt | 3000K 4400 lmS - 4021 lmD
 DI | **C01131WSWDI**

Opt | 4000K 4400 lmS - 4024 lmD
 DI | **C01131WSNDI**

Emy | V2

topLED CRI 90 | 220-240 V AC | 40 W AC




Opt | 4000K 4400 lmS - OnReq lmD
 DI | **C01132WSNDI**


Quick installation

1) Raccordement du Driver au réseau électrique. 2) Installation en appui sur le cadre du faux plafond modulaire.

1) Connection of the Driver to the electrical mains. 2) Surface installation on the modular false ceiling frame.

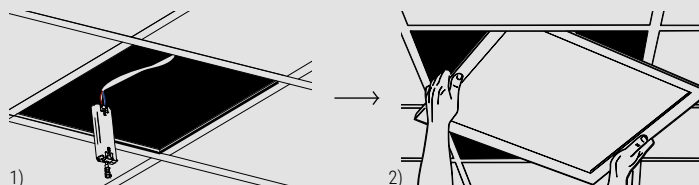

Surface Installation

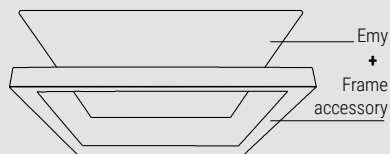

Electronics

Emy C01130 - Emy C01131
C-E100045 ON/OFF - 1 art. - 55
99971.02 DALI/PUSH - 1 art. - 56


Accessories

Emy C01130 - Emy C01131*
99584 Suspension cables 4 pc.
 Emy C01130 - Emy C01132
99556 Surface frame 600x600x50
 Emy C01131
99898 Surface frame 1200x300x70

*installation over 2.80 meters is recommended.
 Not suitable for Emy C01132WSNDI.


Finishes Painted white






Corps en aluminium peint texturé blanc.
Diffuseur en polyméthacrylate de méthyle satiné.

*White textured painted aluminium body.
Satin polymethylmethacrylate diffuser.*

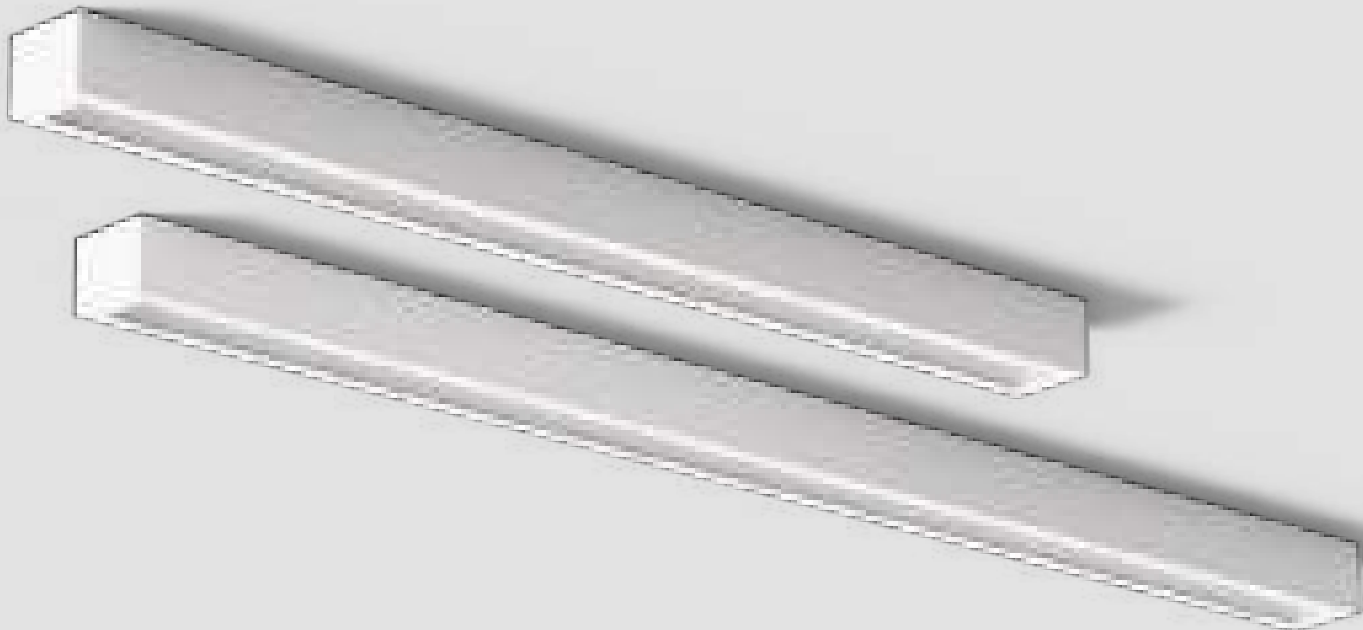

Box_SB
topLED CRI 80 | 220-240 V
18 W DC - 20 W AC



- Opt


3000K 2618 lmS - 1530 lmD
- ☐ DI

8259
- Opt

4000K 2879 lmS - 1750 lmD
- ☐ DI

8259N

Box_SB
topLED CRI 80 | 220-240 V
24 W DC - 26 W AC



- Opt

3000K 3490 lmS - 1995 lmD
- ☐ DI

8260
- Opt

4000K 3839 lmS - 2255 lmD
- ☐ DI

8260N

* DIMMER REQUIRED. Find it in "Electronics".


Electronics

- KIT0026

Phase-cut dimmer - 100 W
- KIT0080


Phase-cut CASAMBI dim - 1 art.





Corps en aluminium peint texturé blanc ou noir.
Diffuseur en polycarbonate opalin.

*White or black textured painted aluminium body.
Opal polycarbonate diffuser.*

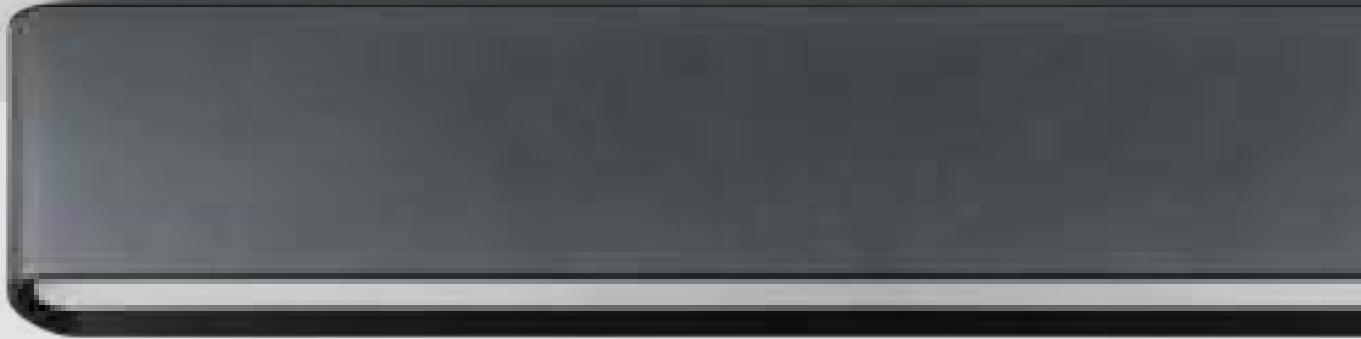

Satori_S

topLED CRI 90 | 220-240 V

24 W DC - 28 W AC

864

27

80



Opt	2700K 3933 lmS - 2288 lmD
DI	9189M
DI	9190M
Opt	3000K 4171 lmS - 2425 lmD
DI	9189
DI	9190

Satori_S

topLED CRI 90 | 220-240 V

36 W DC - 44 W AC

1144

27

80



Opt	2700K 5560 lmS - 3387 lmD
DI	9191M
DI	9192M
Opt	3000K 5868 lmS - 3590 lmD
DI	9191
DI	9192

Electronics

KIT0079 DALI CASAMBI dimmer - 1 art.





Diffuseur en polyméthacrylate de méthyle sablé.
Corps en aluminium peint texturé blanc.

*Sandblasted polymethylmethacrylate diffuser.
White textured painted aluminium body.*


ONE TO ONE



81



One to one_S
arrayLED CRI 80 | 220-240 V
8 W DC - 10 W AC



Opt	2700K 1007 lmS - 763 lmD
DI	7618M

Opt	3000K 1082 lmS - 820 lmD
DI	7618

* DIMMER REQUIRED. Find it in “Electronics”.

Electronics

KIT0026	Phase-cut dimmer - 100 W
KIT0080	Phase-cut CASAMBI dim - 1 art.



Corps en aluminium peint texturé blanc.
Diffuseur en verre transparent.

Body in white textured painted aluminium.
Diffuser in clear glass.




OUTLOOK



83 237



Outlook_S
arrayLED CRI 90 | 220-240 V
8 W DC - 11 W AC



Opt | 2700K 1007 lmS - 763 lmD
DI | **8472M**

Opt | 3000K 1082 lmS - 820 lmD
DI | **8472**

*** DIMMER REQUIRED.** Find it in "Electronics".

Electronics
KIT0026 Phase-cut dimmer - 100 W
KIT0080 Phase-cut CASAMBI dim - 1 art.





SINFONIA



206

261


477

Corps en aluminium peint texturé blanc ou noir, ou avec des finitions galvaniques chrome ou or brossé.
Diffuseur en polyméthacrylate de méthyle transparent.

*White or black textured painted aluminium body,
or in galvanic chrome or brushed gold finishes.
Transparent polymethylmethacrylate diffuser.*




Rossini_S | V2
topLED CRI 90 | 220-240 V
5 W DC - 7 W AC



Opt	2700K 640 lmS - 608 lmD
DI	CA146AWHMDI
DI	CA146ABBMDI
DI	CA146ACHMDI
DI	CA146AHGMDI

Opt	3000K 679 lmS - 645 lmD
DI	CA146AWHWDI
DI	CA146ABBWDI
DI	CA146ACHWDI
DI	CA146AHGWDI

Finishes Text white R9003 Polished (galvanic) chrome
 Text black R9005 Brushed gold

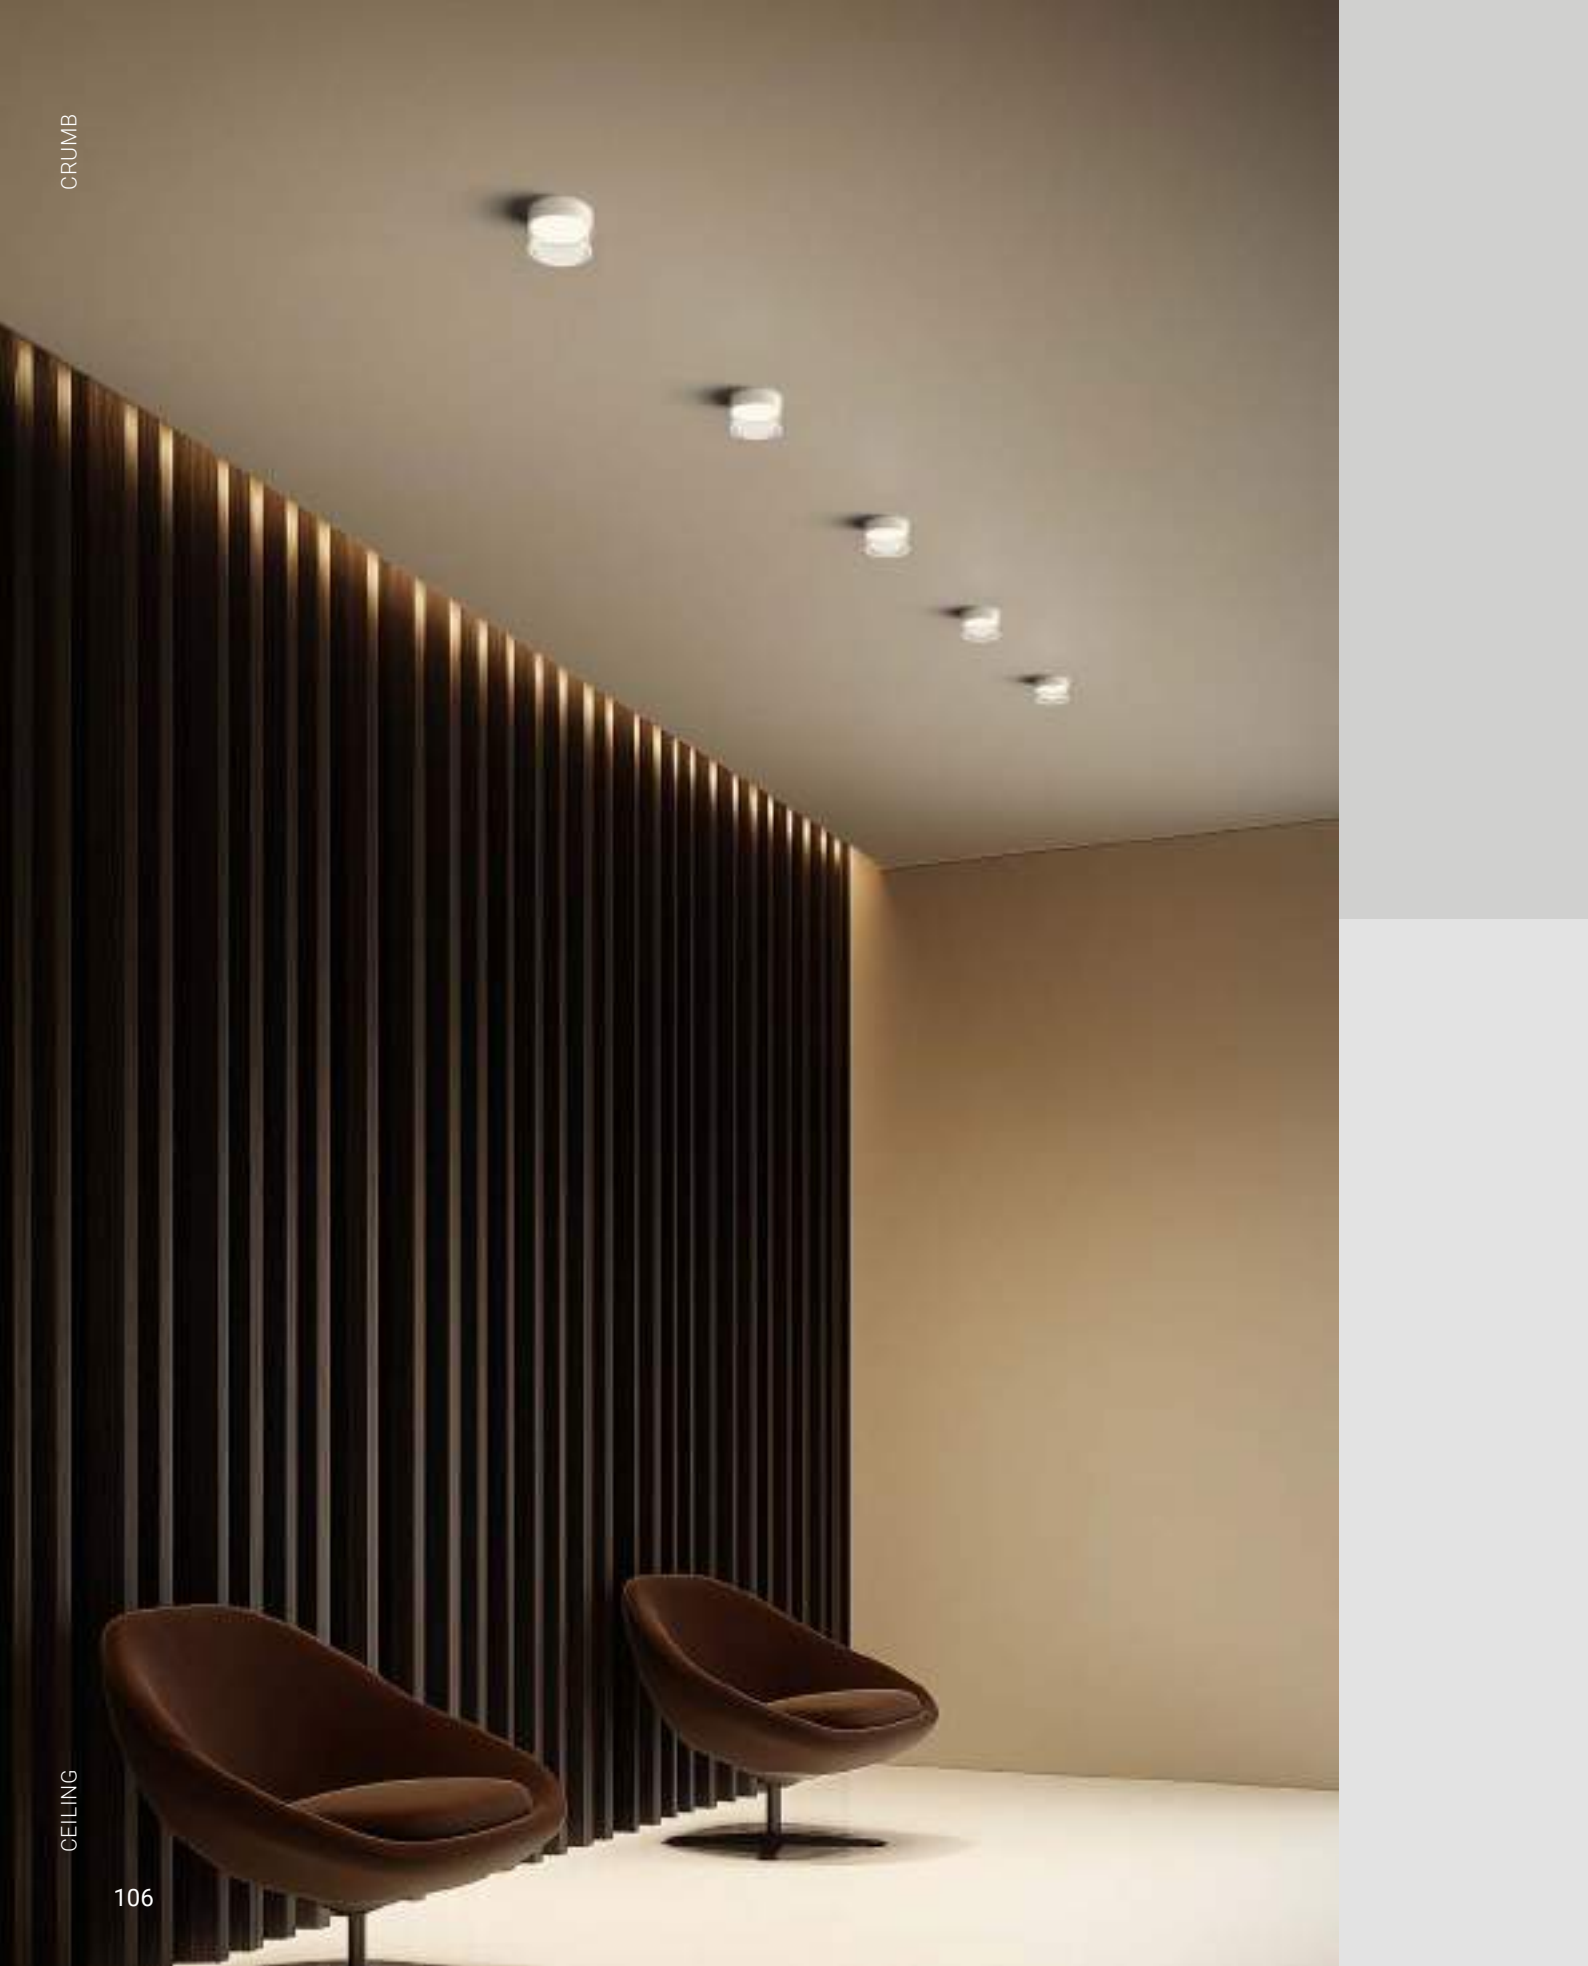



CRUMB



Corps en métal peint texturé blanc ou noir. Diffuseur en verre borosilicaté transparent ou fumé. Associations : blanc/transparent, noir/fumé.


White or black textured painted metal body.

Transparent or smoked borosilicate glass diffuser.

Combinations: white/transparent, black/smoked.

**Crumb**



topLED CRI 90 | 220-240 V
9 W DC - 10 W AC



Opt	3000K	1013 lmS - 516 lmD
□ DI	90281	
■ DI	90296	

Crumb

topLED CRI 90 | 220-240 V
13 W DC - 15 W AC



Opt	3000K	1653 lmS - 828 lmD
□ DI	90282	
■ DI	90297	

Finishes □ Text white R9003/transparent glass
■ Text black R9005/smoked glass






Diffuseur en polyéthylène.
Monture en polycarbonate blanc.

*Polyethylene diffuser.
White polycarbonate fixture.*

Oh!

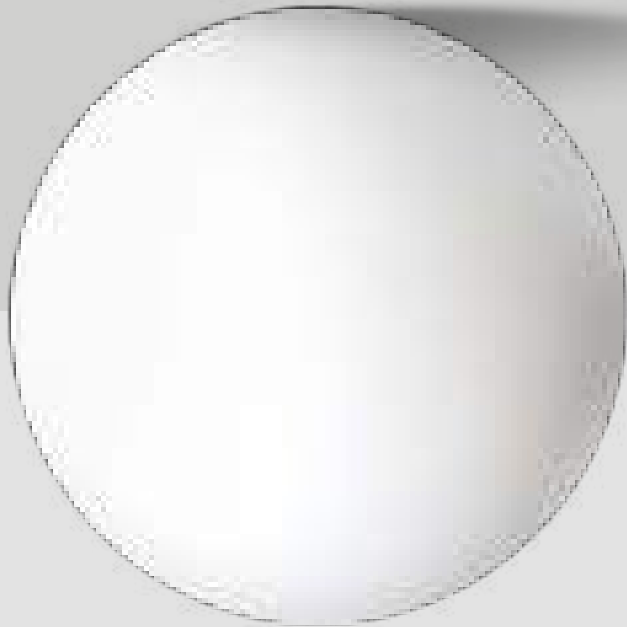

Oh!_S LED
topLED CRI 90 | 220-240 V
7 W DC - 8 W AC



Opt | 3000K 1022 lmS - 845 lmD
DI | **12131**

Oh!_S LED
topLED CRI 90 | 220-240 V
14 W DC - 15 W AC




Opt | 3000K 1930 lmS - 1585 lmD
DI | **12132**



Opt | 3000K 1930 lmS - 1584 lmD
DI | **CA130CPLWDI**

Oh!_S LED
topLED CRI 90 | 220-240 V
18 W DC - 20 W AC | ON-OFF
27 W DC - 28 W AC | DALI-PUSH



Opt | 3000K 2748 lmS - 2115 lmD
DI | **12133**



Opt | 3000K 4067 lmS - 3133 lmD
DI | **CA131CPLWDI**

Oh!_S E27
220-240 V



E27 1 x 30 W Max Halogen
(LED bulbs compatible)
DI | **12122**

Oh!_S E27
220-240 V



E27 1 x 46 W Max Halogen
(LED bulbs compatible)
DI | **12124**

Oh!_S E27
220-240 V



E27 1 x 46 W Max Halogen
(LED bulbs compatible)
DI | **12126**

Electronics

DALI versions
KIT0079 DALI CASAMBI dimmer - 1 art.







Diffuseur en polyéthylène.
Monture en polycarbonate blanc.

*Polyethylene diffuser.
White polycarbonate fixture.*

OH! SMASH




Oh! Smash_S E27
220-240 V



E27 1 x 30 W Max Halogen
(LED bulbs compatible)

12214

Oh! Smash_S E27
220-240 V



E27 1 x 46 W Max Halogen
(LED bulbs compatible)

12217






GEMINI





403 475

Corps en métal peint texturé blanc avec panneau en grès aux finitions noir grec et statuaire, ou en verre à effet bronze miroir. Monture en métal peint texturé blanc.

White textured painted metal body with stoneware panel in Nero Greco and statuary finishes, or in glass with mirrored bronze effect. White textured painted metal fixture.

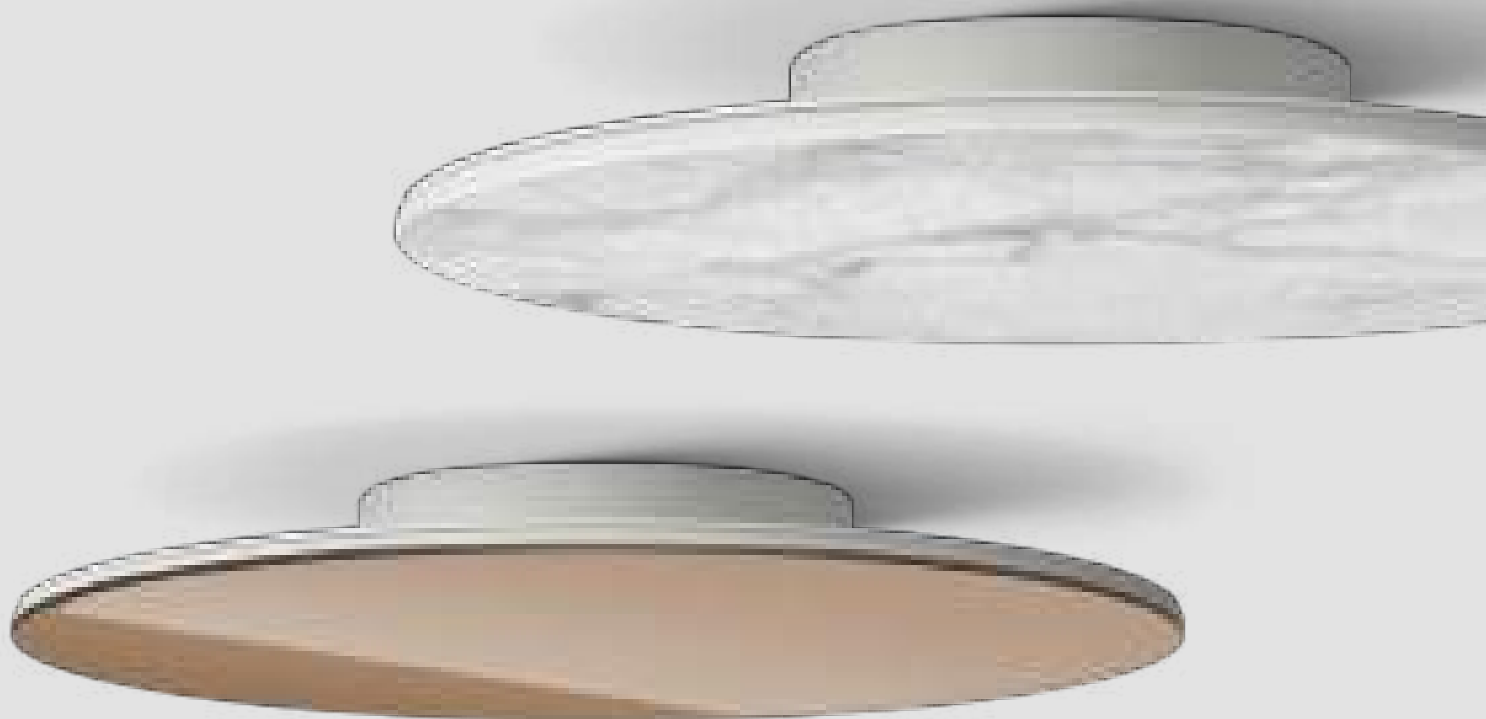**Gemini_S**

topLED CRI 90 | 220-240 V
24 W DC - 26 W AC



Opt | 2700K 2621 lmS - 1916 lmD

■ DI **9666M**
□ DI **9667M**
■ DI **9668M**

Opt | 3000K 2818 lmS - 2060 lmD

■ DI **9666**
□ DI **9667**
■ DI **9668**

Finishes ■ Nero Greco ■ Mirrored bronze
□ Statuary



Corps en métal peint texturé blanc avec
panneau en plâtre peint. Monture en métal
peint texturé blanc.


*White textured painted metal body with paintable
plaster panel. White textured painted metal fixture.*



GEMINI PAINT




407

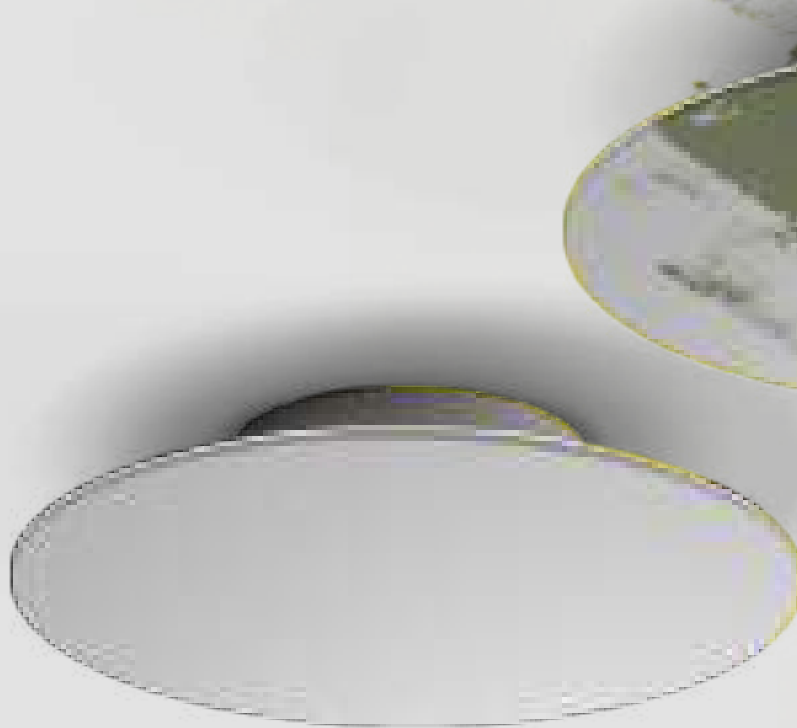

Gemini Paint _S

topLED CRI 90 | 220-240 V
24 W DC - 26 W AC



Opt | 2700K 2621 lmS - 1916 lmD
DI | **9930M**

Opt | 3000K 2818 lmS - 2060 lmD
DI | **9930**

Finishes ☐ White gypsum





HORIZON




297

Diffuseur en dôme de verre sérigraphié/sablé. Disque inférieur en métal avec finitions galvaniques or et chrome, ou peint texturé blanc. Monture en métal peint texturé blanc.

Dome-shaped diffuser in screen-printed/sand-blasted glass.
Metal lower disc in galvanic gold and chrome, or white textured painted.
White textured painted metal fixture.

**Horizon_S**


topLED CRI 90 | 220-240 V
29 W DC - 34 W AC



Opt	3000K	3652 lmS - 2270 lmD
DI	90285	
DI	90284	
DI	90283	


Finishes Satin glass + Text white 9003 Satin glass + Polished (galvanic) gold
 Satin glass + Polished (galvanic) chrome





A collection of six modern, minimalist lamps. Each lamp features a thin, vertical metal stand and a large, circular, flat shade. The shades are in various colors: two are white, two are dark blue, and two are a light, warm tone. The stands are also in different colors: one is silver, one is dark blue, and the others are in shades of brown and black. The lamps are arranged in a cluster, with some standing taller than others, creating a dynamic composition. The background is a plain, light gray.

119

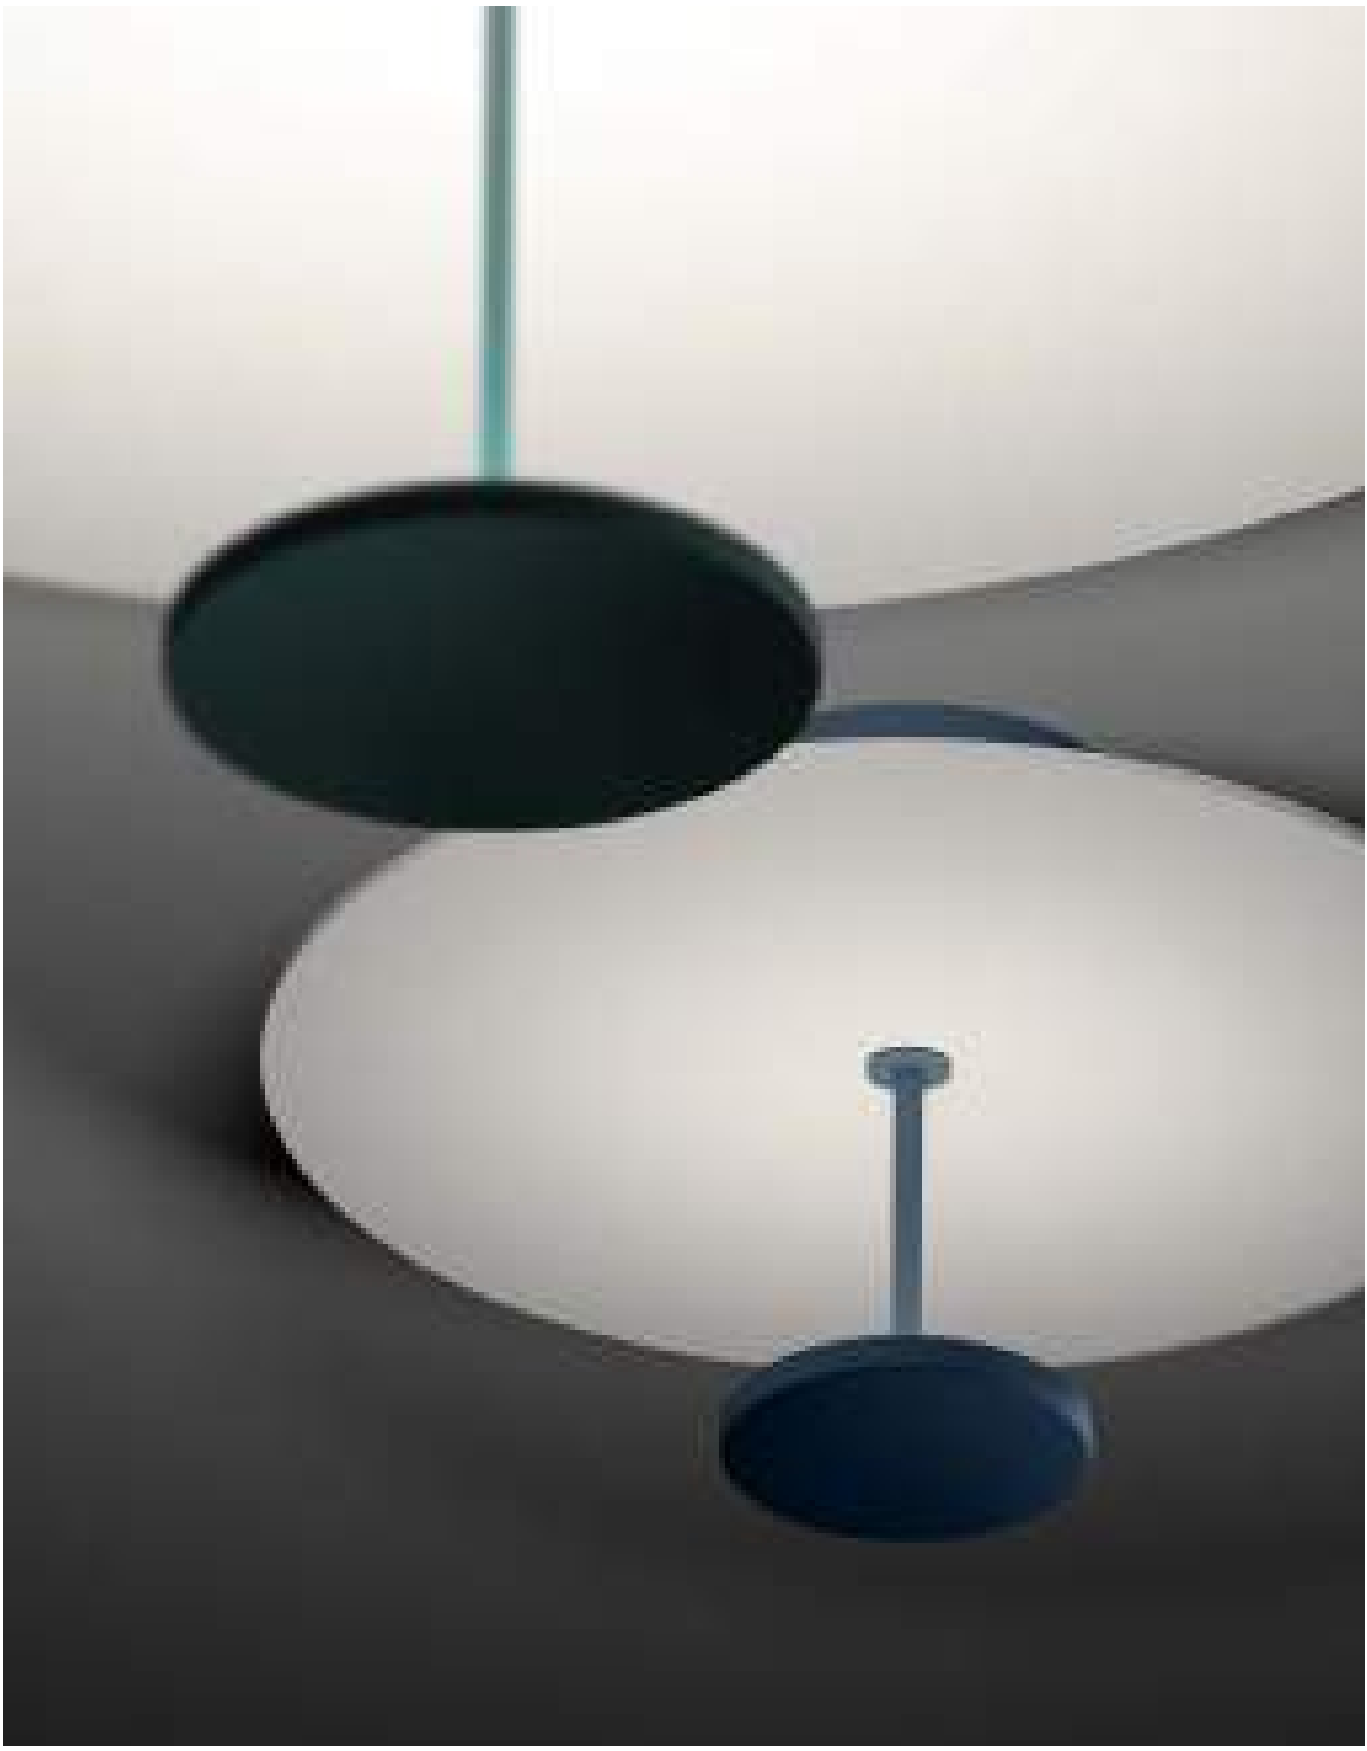







DELFI





307 465

Abat-jour en métal peint extérieurement dans les couleurs blanc, noir, pêche, pétrole et bleu profond, avec finition texturée. Intérieur peint blanc.

Metal lampshade externally painted in white, black, peach, petrol and deep blue, with textured finish. White painted interior.

**Delfi_S**


topLED CRI 90 | 220-240 V
13 W DC - 15 W AC



Opt	2700K 1532 lms - 1057 lmD
DI	CA051DWHMDI
DI	CA051DBBMDI
DI	CA051DBEMDI
DI	CA051DGBMDI
DI	CA051DLUMDI
Opt	3000K 1613 lms - 1113 lmD
DI	CA051DWHWDI
DI	CA051DBBWDI
DI	CA051DBEWDI
DI	CA051DGBWDI
DI	CA051DLUWDI

Delfi_S


topLED CRI 90 | 220-240 V
20 W DC - 22 W AC



Opt	2700K 2513 lms - 1811 lmD
DI	CA052DWHMDI
DI	CA052DBBMDI
DI	CA052DBEMDI
DI	CA052DGBMDI
DI	CA052DLUMDI
Opt	3000K 2645 lms - 1906 lmD
DI	CA052DWHWDI
DI	CA052DBBWDI
DI	CA052DBEWDI
DI	CA052DGBWDI
DI	CA052DLUWDI

Delfi_S

topLED CRI 90 | 220-240 V
32 W DC - 35 W AC



Opt	2700K 3892 lms - 2995 lmD
DI	CA053DWHMDI
DI	CA053DBBMDI
DI	CA053DBEMDI
DI	CA053DGBMDI
DI	CA053DLUMDI
Opt	3000K 4097 lms - 3153 lmD
DI	CA053DWHWDI
DI	CA053DBBWDI
DI	CA053DBEWDI
DI	CA053DGBWDI
DI	CA053DLUWDI

* DIMMER REQUIRED. Find it in "Electronics".

Electronics

KIT0026 Phase-cut dimmer - 100 W
KIT0080 Phase-cut CASAMBI dim - 1 art.

Finishes Text white R9003 Text peach R3012 Text deep blue R5011
 Text black R9005 Text petrol R6004









Monture et corps en aluminium peint texturé dans les couleurs blanc, noir, pêche, pétrole et bleu profond. Diffuseur en verre transparent.

Textured painted aluminium fixture and body in the colours white, black, peach, petrol and deep blue. Transparent glass diffuser.

CRISTALBOLLA





311



Cristalbolla_S

topLED CRI 90 | 220-240 V
10 W DC - 11 W AC




Opt	2700K 1338 lmS - 1127 lmD
DI	CA089DWHMDI
DI	CA089DBBMDI
DI	CA089DBEMDI
DI	CA089DGBMDI
DI	CA089DLUMDI

Opt	3000K 1408 lmS - 1186 lmD
DI	CA089DWHWDI
DI	CA089DBBWDI
DI	CA089DBEWDI
DI	CA089DGBWDI
DI	CA089DLUWDI

Cristalbolla_S

topLED CRI 90 | 220-240 V
17 W DC - 19 W AC




Opt	2700K 2282 lmS - 1871 lmD
DI	CA090DWHMDI
DI	CA090DBBMDI
DI	CA090DBEMDI
DI	CA090DGBMDI
DI	CA090DLUMDI

Opt	3000K 2402 lmS - 1969 lmD
DI	CA090DWHWDI
DI	CA090DBBWDI
DI	CA090DBEWDI
DI	CA090DGBWDI
DI	CA090DLUWDI

Cristalbolla_S

topLED CRI 90 | 220-240 V
23 W DC - 26 W AC



Opt	2700K 3065 lmS - 2314 lmD
DI	CA091DWHMDI
DI	CA091DBBMDI
DI	CA091DBEMDI
DI	CA091DGBMDI
DI	CA091DLUMDI

Opt	3000K 3226 lmS - 2436 lmD
DI	CA091DWHWDI
DI	CA091DBBWDI
DI	CA091DBEWDI
DI	CA091DGBWDI
DI	CA091DLUWDI

* DIMMER REQUIRED. Find it in "Electronics".

Electronics

KIT0026 Phase-cut dimmer - 100 W
KIT0080 Phase-cut CASAMBI dim - 1 art.

Finishes Text white R9003 Text peach R3012 Text deep blue R5011
 Text black R9005 Text petrol R6004










JOINT




409

Corps et monture en métal peint texturé blanc. Diffuseur en polyméthacrylate de méthyle opalin.

White textured painted metal body and fixture.
Opal polymethylmethacrylate diffuser.

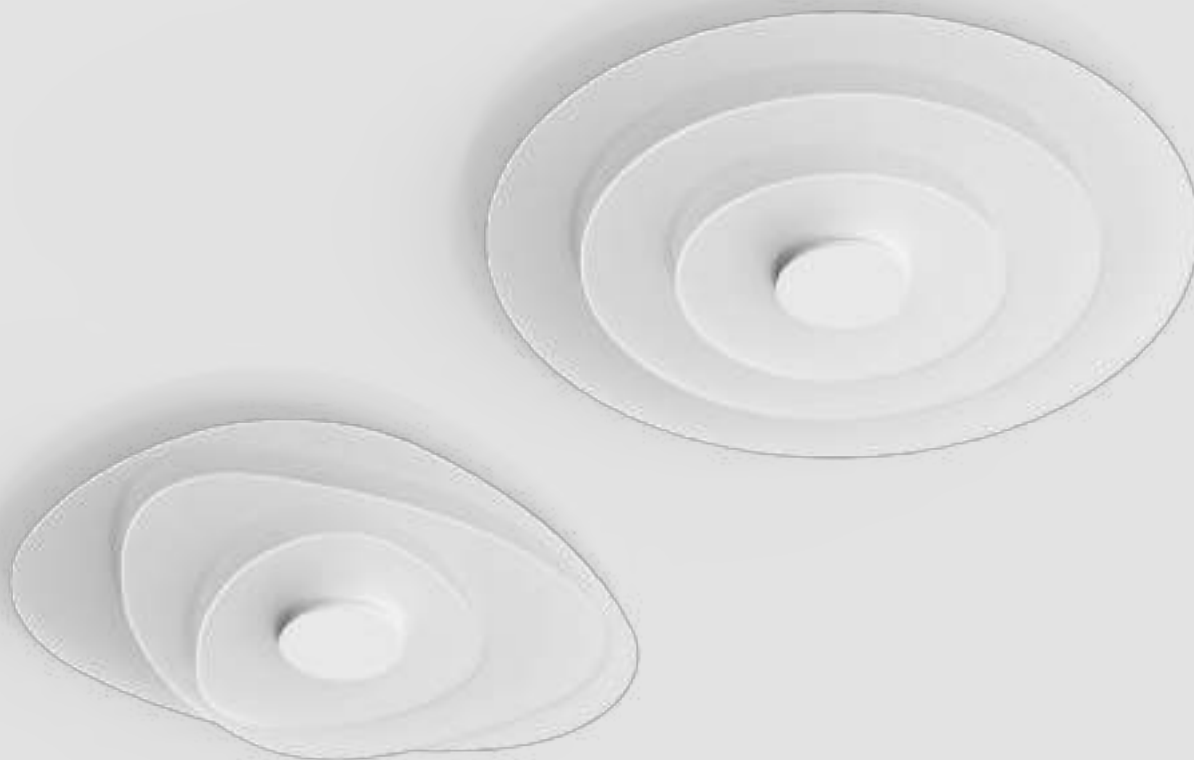**Joint_S**

topLED CRI 90 | 220-240 V
30 W DC - 32 W AC




Opt | 2700K 4086 lmS - 2110 lmD
DI | **CA095DWHMDI**

Opt | 3000K 4301 lmS - 2221 lmD
DI | **CA095DWHWDI**

Joint_S

topLED CRI 90 | 220-240 V
30 W DC - 32 W AC



Opt | 2700K 4086 lmS - 2110 lmD
DI | **CA097DWHMDI**


Opt | 3000K 4301 lmS - 2221 lmD
DI | **CA097DWHWDI**

* DIMMER REQUIRED. Find it in "Electronics".

Electronics

KIT0026 Phase-cut dimmer - 100 W
KIT0080 Phase-cut CASAMBI dim - 1 art.



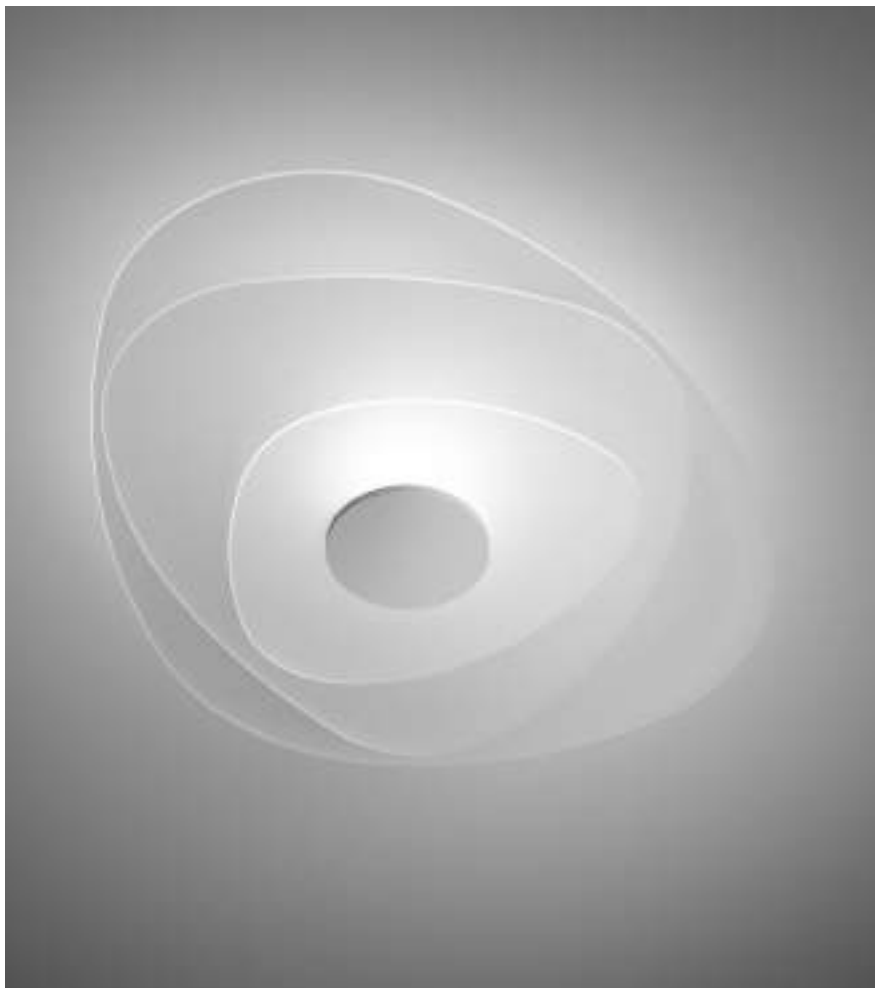

INDOOR

GYPSUM COLORING POINT	137
GOOSE	139
ETA	141
BART	143
BEEBO	145
DUCK	147
NAVATA OPTUS	149
BUBBLE	153



PROJECTORS






Base en plâtre peignable. Corps en aluminium
peint texturé blanc ou noir.
Anneaux interchangeables en ABS peint.

*Paintable plaster base. Body in white
or black textured painted aluminium.
Interchangeable painted ABS rings.*

GYPSUM COLORING POINT





65



Gypsum Coloring Point

powerLED CRI 90 | 220-240 V
9 W DC - 12 W AC





Opt	2700K 992 lmS - 555 lmD
24°	CA035AWHMFL
42°	CA035AWHMMW
24°	CA035ABBMFL
42°	CA035ABBMW

Opt	3000K 1049 lmS - 587 lmD
24°	CA035AWHWFL
42°	CA035AWHWMW
24°	CA035ABBWFL
42°	CA035ABBMW

Gypsum Coloring Point

powerLED CRI 90 | 24 V
9 W DC



Opt	2700K 992 lmS - 768 lmD
24°	CA035JWHMFL
42°	CA035JWHMMW
24°	CA035JBBMFL
42°	CA035JBBMW

Opt	3000K 1049 lmS - 817 lmD
24°	CA035JWWFL
42°	CA035JWHWMW
24°	CA035JBBWFL
42°	CA035JBBWMW

Electronics

Gypsum Coloring Focus 9W 24V
KIT0097 DALI/0/1-10V/PUSH - 1-10 art. - Ø 25

Accessories included

Honeycomb filter (1x)
White ring (1x)
Black ring (1x)
Painted gold ring (1x)
Painted copper ring (1x)



Finishes Text white R9003
 Text black R9005





GOOSE


Corps en aluminium peint texturé blanc ou noir.
Articulation en or ou nickel brossé.
Diffuseur en polyméthacrylate de méthyle transparent.

*Body in white or black textured painted aluminium.
Joint in brushed gold or nickel.
Diffuser in clear polymethylmethacrylate.*



Goose

powerLED CRI 90 | 220-240 V
8,5 W DC - 11 W AC



Opt	2700K 698 lmS - 593 lmD
28°	9727M
28°	9728M
28°	9730M
28°	9731M

Opt	2700K 750 lmS - 638 lmD
28°	9727
28°	9728
28°	9730
28°	9731

* DIMMER REQUIRED. Find it in "Electronics".

Electronics

KIT0026	Phase-cut dimmer - 100 W
KIT0080	Phase-cut CASAMBI dim - 1 art.

Finishes	Text white R9003/Brushed gold	Text white R9003/Brushed nickel
	Text black R9005/Brushed nickel	Text black R9005/Brushed gold






Corps en aluminium peint texturé blanc ou noir.
Diffuseur en polycarbonate transparent.

Body in white or black textured painted aluminium.
Diffuser in clear polycarbonate.



Eta_S
arrayLED CRI 90 | 198-264 V
9 W DC - 11 W AC



Opt	2700K 910 lmS - 796 lmD
15°	9908M
15°	9911M
Opt	3000K 958 lmS - 856 lmD
15°	9908
15°	9911
Opt	2700K 910 lmS - 796 lmD
36°	9909M
36°	9912M
Opt	3000K 958 lmS - 856 lmD
36°	9909
36°	9912
Opt	2700K 910 lmS - 796 lmD
60°	9910M
60°	9913M
Opt	3000K 958 lmS - 856 lmD
60°	9910
60°	9913

* DIMMER REQUIRED. Find it in "Electronics".

Electronics

KIT0026	Phase-cut dimmer - 100 W
KIT0080	Phase-cut CASAMBI dim - 1 art.

Finishes Text white R9003
 Text black R9005




Corps en aluminium peint texturé blanc ou noir.
Diffuseur en polycarbonate transparent.

*Body in white or black textured painted aluminium.
Diffuser in clear polycarbonate.*



Bart_S
arrayLED CRI 90 | 220-240 V
8 W DC - 11 W AC



Opt	3000K 1082 lms - 720 lmD
47°	8466
47°	8467

* DIMMER REQUIRED. Find it in "Electronics".

Electronics

KIT0026 Phase-cut dimmer - 100 W
KIT0080 Phase-cut CASAMBI dim - 1 art.





BEEBO




367

Tête en aluminium peint texturé blanc ou noir.
Corps en aluminium peint texturé blanc ou noir, ou en bois de
chêne. Diffuseur en polycarbonate transparent.

Head in white or black textured painted aluminium.
Body in white or black textured painted aluminium
or in oak wood. Diffuser in clear polycarbonate.



Beebo_S
arrayLED CRI 90 | 220-240 V
8 W DC - 11 W AC



Opt	3000K	1082 lms	820 lmD
47°	8460		
47°	8461		
47°	8462		


* DIMMER REQUIRED. Find it in "Electronics".

Electronics

- KIT0026** Phase-cut dimmer - 100 W
- KIT0080** Phase-cut CASAMBI dim - 1 art.

Accessories

- 8460 - 8461
KIT0028 Bracket for installation in pairs
on a single lighting point
(see diagram below)
- 8462
KIT0029 Bracket for installation in pairs
on a single lighting point
(see diagram below)







DUCK




369

Corps en aluminium peint texturé blanc ou noir. Sphère en métal avec finitions galvaniques or ou chrome.
Associations : blanc/chrome, noir/or.

White or black textured painted aluminium body.
Metal sphere in galvanic gold or chrome finish.
Combinations: white/chrome, black/gold.



Duck_S
powerLED CRI 90 | 220-240 V
8 W DC - 10 W AC



Opt	2700K 727 lmS - 463 lmD
□ 45°	9633M
■ 45°	9634M
Opt	3000K 782 lmS - 498 lmD
□ 45°	9633
■ 45°	9634

* DIMMER REQUIRED. Find it in "Electronics".

Electronics	
KIT0026	Phase-cut dimmer - 100 W
KIT0080	Phase-cut CASAMBI dim - 1 art.







Corps et bases en aluminium peint texturé avec
finition sable. Groupe optique noir.

Body and bases in textured aluminium
with sand finish. Black optical unit.

NAVATA OPTUS

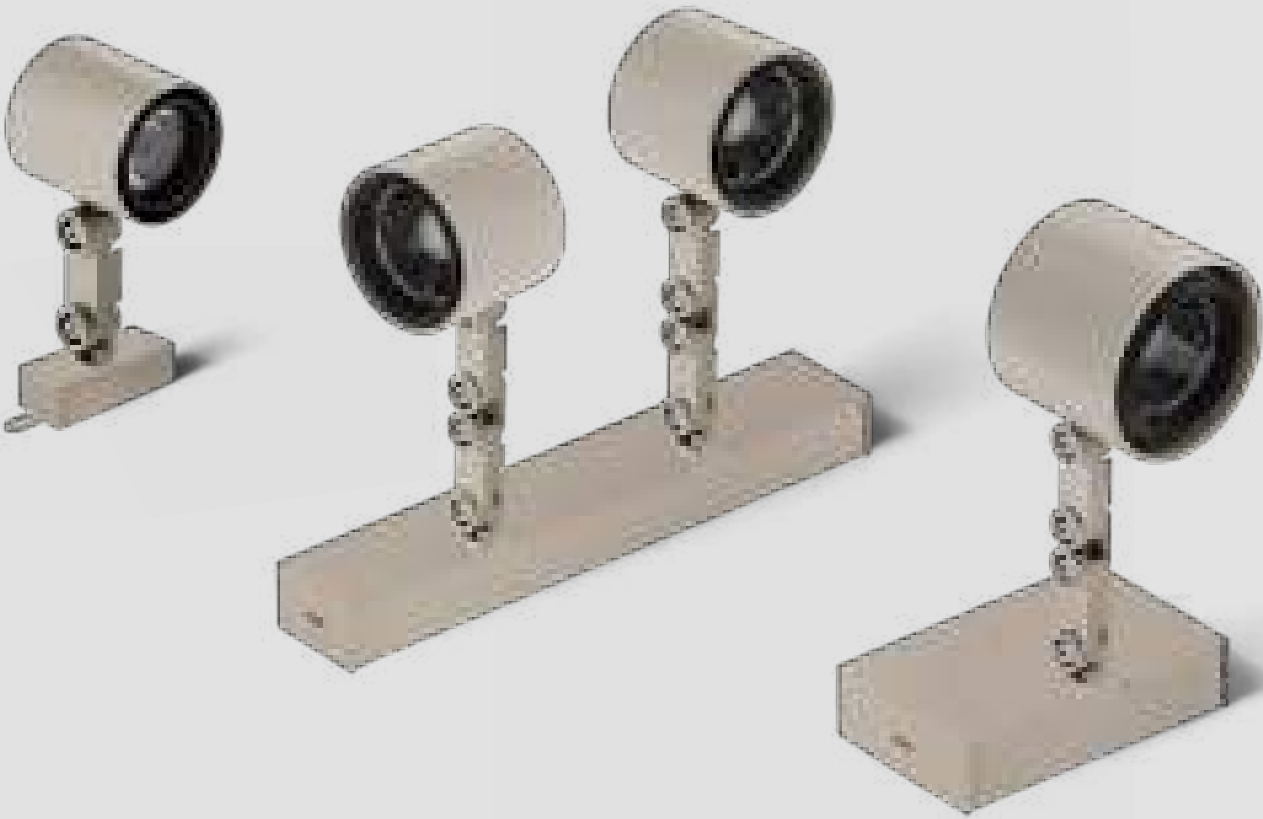


Navata_Optus
arrayLED CRI 90 Balance
450 mA | 16 W DC




Opt | 3000K 2572 lms - 1869 lmD
82903W30

Navata_Optus
arrayLED CRI 90 Balance
700 mA | 24 W DC



Opt | 3000K 3877 lms - 3106 lmD
82906W30

Navata_Optus
arrayLED CRI 90 Balance
950 mA | 34 W DC



Opt | 3000K 5019 lms - 4011 lmD
82909W30


Bases, electronics, optics & accessories
page 151

Finishes Text sand



Base

220-240 V AC | 300 mA | 1050 mA



From 8,5 to 38 W DC

83055


DALI2 - DALI PUSH

From 8,5 to 38 W DC

83054

Base

220-240 V AC | 300 mA | 1050 mA



From 8,5 to 38 W DC


83052

DALI2 - DALI PUSH

From 8,5 to 38 W DC

83051

Base



83242

To be completed with remote power pack

 * Le pilote présent dans l'appareil est conforme à la norme IEC 61347-2-13 annexe J, et peut donc être alimenté par des systèmes d'alimentation centralisée.

* The driver contained in the device complies with IEC 61347-2-13 annex J, and can therefore be powered by centralized power supply systems.

Electronics for Base 83242

Navata Optus 16 W DC

99734 ON/OFF - 1 art. - 64 48

C-E100001 DALI/PUSH - 1 art. - 64 54

Navata Optus 24 W DC

99112 ON/OFF - 1 art. - 64 64

C-E100016 DALI/PUSH - 1 art. - 64 54

Navata Optus 34 W DC

99146 ON/OFF - 1 art. - 64 64

99330 DALI/PUSH - 1 art. - 64 56

Finishes

 Text sand

 Transparent

 Smooth black

Optics & Accessories



-  **99827** Spot
-  **99828** Flood
-  **99829** Wide Flood

suitable for: Navata_Optus 16W

-  **99808** Spot
-  **99809** Flood
-  **99810** Wide Flood

suitable for: Navata_Optus 24W

 **C-U300015**

 **C-U300016**

 **C-U300017**

suitable for: Navata_Optus 34W



-  **99844** Focal Kit (min 16° / max 50°)


suitable for: Navata_Optus 16W

-  **99843** Focal Kit (min 16° / max 42°)

suitable for: Navata_Optus 24W

-  **C-U300034** Focal Kit (min 16° / max 42°)

suitable for: Navata_Optus 34W



-  **99841** Honeycomb (a) with fixing ring (b)

suitable for: Focal kit 99844

-  **99842** Honeycomb (a) with fixing ring (b)

suitable for: Focal kit 99843

-  **C-U300014** Honeycomb (a) without fixing ring (b)

suitable for: Focal kit C-U300034





BUBBLE

Base en plâtre peintable.


Corps en aluminium peint texturé blanc ou noir.

Paintable plaster base.

Body in white or black textured painted aluminium.




Bubble
arrayLED CRI 90 | 6 W DC | 24 V



Opt	2700K 696 lmS - 643 lmD
15°	9786M
15°	9787M
34°	9788M
34°	9789M
62°	9790M
62°	9791M

Opt	3000K 733 lmS - 677 lmD
15°	9786
15°	9787
34°	9788
34°	9789
62°	9790
62°	9791

Bubble
arrayLED CRI 90 | 9 W DC | 24 V



Opt	2700K 945 lmS - 781 lmD
15°	9792M
15°	9793M
34°	9794M
34°	9795M
62°	9796M
62°	9797M

Opt	3000K 995 lmS - 822 lmD
15°	9792
15°	9793
34°	9794
34°	9795
62°	9796
62°	9797

Electronics

Bubble 6W

KIT0097 DALI/0/1-10V/PUSH - 1-13 art. - Ø 25

Bubble 9W

KIT0097 DALI/0/1-10V/PUSH - 1-10 art. - Ø 25

Finishes Text white R9003
 Text black R9005

INDOOR

OPTUS	157
MIC	161
ROLLIP35_T	163
TRACK SYSTEM	164



TRACK





OPTUS




Corps en aluminium peint texturé blanc ou noir.
Groupe optique noir.

Body in white or black textured painted aluminium.
Black optical unit.




Optus_T | V2
arrayLED CRI 90 | 220-240 V
10 W DC - 12 W AC



Opt	3000K 1892 lmS - 1321 lmD
35°	C00997WHWML
35°	C00997BBWML
52°	C00997WHWWF
52°	C00997BBWWF

Optus_T | V2
arrayLED CRI 90 | 220-240 V
24 W DC - 27 W AC



Opt	3000K 3877 lmS - 3361 lmD
24°	C00440WHWFL
24°	C00440BBWFL
48°	C00440WHWWF
48°	C00440BBWWF

Opt	4000K 4030 lmS - 3429 lmD
24°	C00440WHNFL
24°	C00440BBNFL
48°	C00440WHNWF
48°	C00440BBNWF



Optics & Accessories



- C-U300009 Spot
- C-U300012 Flood
- C-U300010 Wide Flood

suitable for: Optus_T V2 16W

- C-U300015 Spot
- C-U300016 Flood
- C-U300017 Wide Flood

suitable for: Optus_T V2 24W



- 83347 Focal Kit (min 16° / max 42°)

suitable for: Optus_T V2 10W

- C-U300034 Focal Kit (min 16° / max 42°)

suitable for: Optus_T V2 16W - Optus_T V2 24W



- C-U300008 Honeycomb

suitable for: Optus_T V2 16W

- C-U300014 Honeycomb

suitable for: Optus_T V2 24W / Focal kit C-U300034



- C-U300031 Cross louvre

suitable for: Optus_T V2 16W - Optus_T V2 24W



- C-U300030 45° Cylindrical screen

suitable for: Optus_T V2 16W - Optus_T V2 24W



- C-U300007 Elliptical filter

suitable for: Optus_T V2 16W



- C-U300013 Elliptical filter

suitable for: Optus_T V2 24W



- C-U300029 Cylindrical screen

suitable for: Optus_T V2 16W - Optus_T V2 24W







Corps en aluminium peint texturé blanc ou noir.
Body in white or black textured painted aluminium.



Mic
powerLED CRI 90 | 220-240 V
25 W DC - 27 W AC



Opt	3000K 3400 lmS - 3253 lmD
24°	C00973WHWFL
24°	C00973BBWFL
49°	C00973WHWWF
49°	C00973BBWWF

Accessories

C-U100005	Flood lens
C-U100006	Medium Flood lens
C-U100007	Wide Flood lens

Finishes Text white R9003
 Text black R9005



Corps en aluminium peint texturé blanc ou noir.
Diffuseur en polycarbonate opalin.



*White or black textured painted aluminium
body. Opal polycarbonate diffuser.*

ROLLIP35_T

**SYS
TEM**
170

Rollip35_T

topLED CRI 90 | 220-240 V
25 W DC - 27,5 W AC





Opt | 3000K 3802 lms - 2850 lmd

DI | C00880WHWDI
DI | C00880BBWDI



Finishes Text white R9003
 Text black R9005

Plan view from above

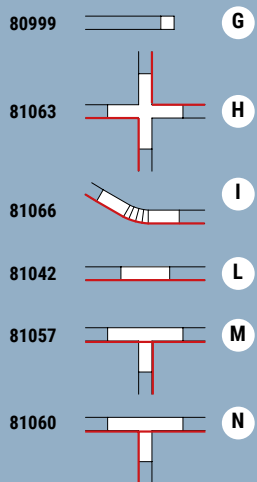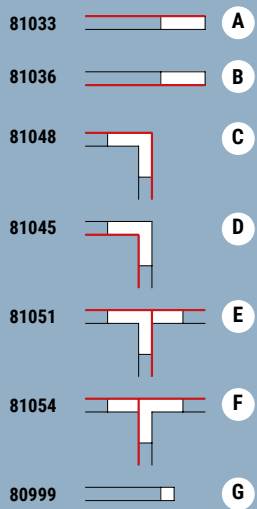

Land line 

The "H", "I" and "L" accessories can be used in both directions.

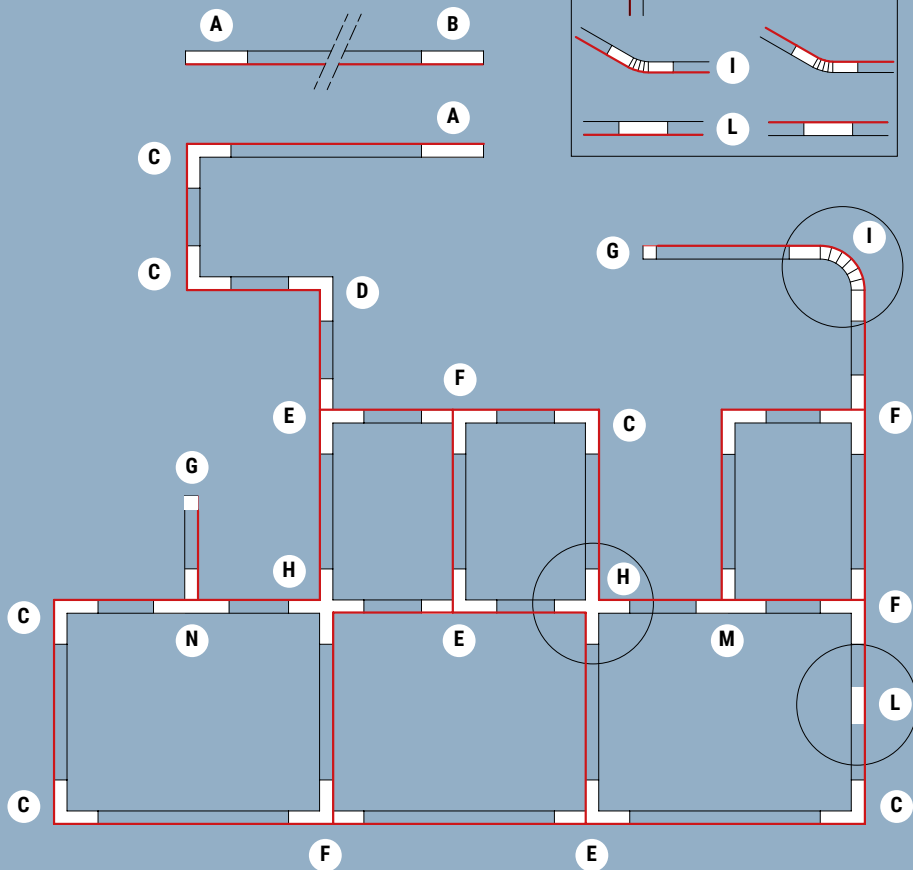


Profil en aluminium peint texturé blanc ou noir.
Composants de jonction en matériau plastique blanc ou noir.

Body in white or black textured painted aluminium.
Joining components in white or black plastic materials.


TRACK SYSTEM




Axonometric view



Plan view




Track system |
Three-phase track + DALI



M	
1	83336
1	83339
2	83337
2	83340
3	83338
3	83341

Track system |
Recessed three-phase track + DALI



M	
1	80990
1	80993
2	80991
2	80994
3	80992
3	80995


Head power supply



Power

DX	81033
DX	81034
SX	81036
SX	81037

Internal electrical joint




81039
81040

Central joint




81042
81043

L-shaped joint



INT	81045
INT	81046
EXT	81048
EXT	81049

Flexible joint




81066
81067

X-shaped joint



81063
81064

T-shaped joint



EXT

SX	81051
SX	81052
DX	81054
DX	81055

T-shaped joint



INT


SX	81057
SX	81058
DX	81060
DX	81061

Sealing cap | Ceiling/Suspension



80999
81000

Sealing cap | Recessed




81002
81003

Suspension



M	
1,5	81012
1,5	81014
5	81013
5	81015

Suspension with adjustment devices



M	
1,5	81006
1,5	81008
5	81007
5	81009


Finishes Text white R9003 Smooth white
 Text black R9005 Smooth black



Rigid suspension




Power supply head cover



X-shaped joint cover



Power supply head gasket



Conductor cutting pliers



Composants de jonction en matériau plastique blanc ou noir.

Joining components in white or black plastic materials.

TRACK SYSTEM



Tensioner clip for rigid suspension




81018
81019

Ceiling-mounted fixing bracket




81086
81087
81088

Stiffening bracket



81024
81025
81026

Central joint cover




81072
81073

L-shaped joint cover



81075
81076

T-shaped joint cover




81078
81079

Three-phase track cover



83249
83250

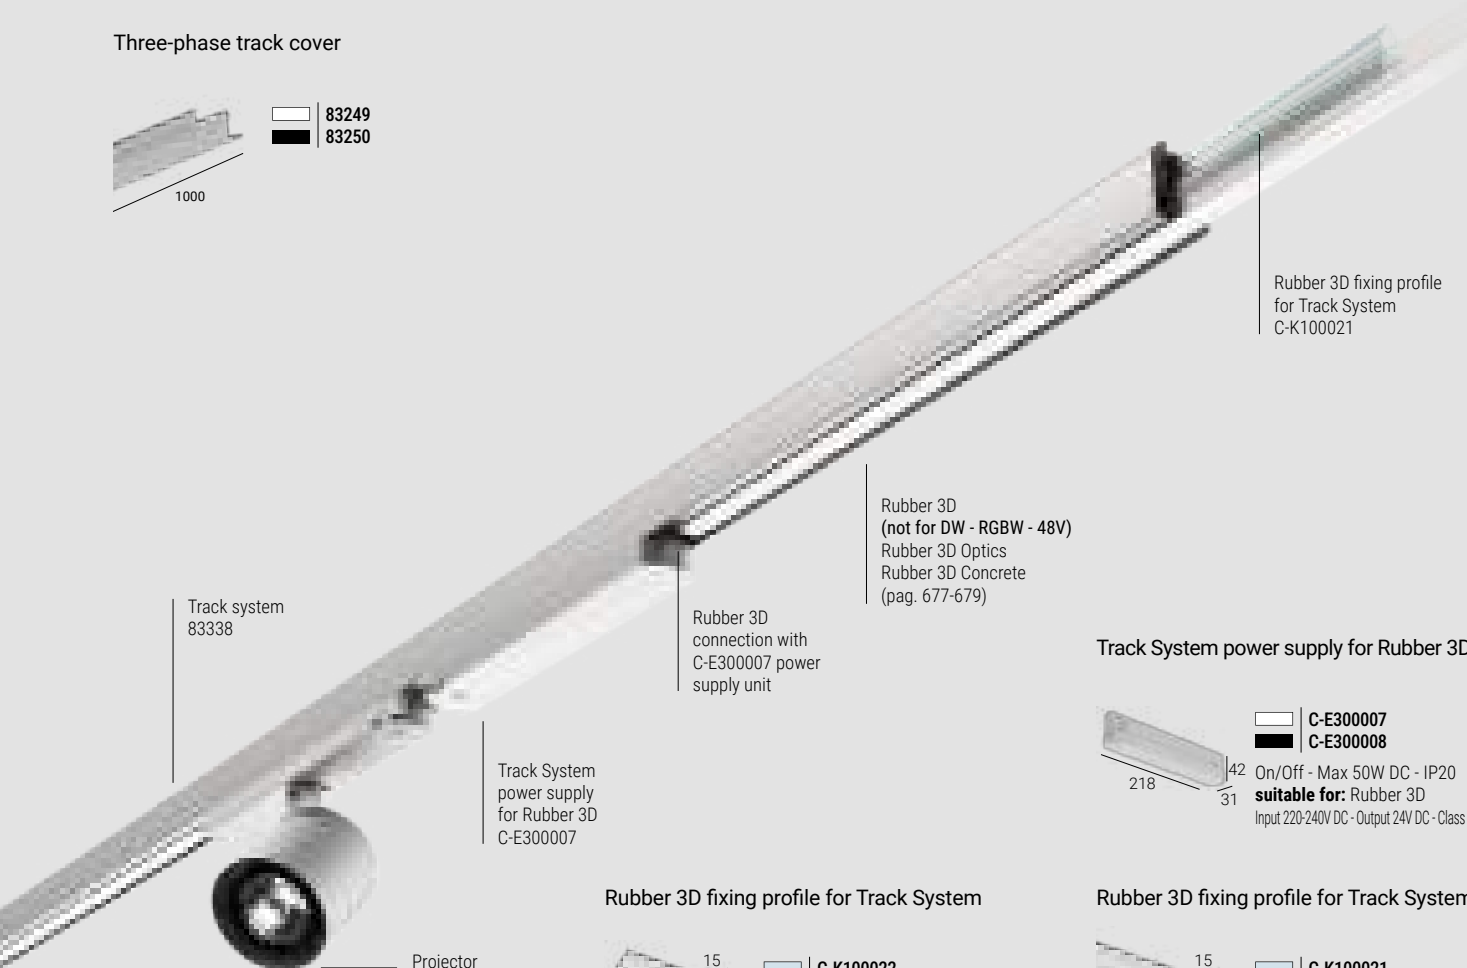


Track System power supply for Rubber 3D




C-E300007
C-E300008
On/Off - Max 50W DC - IP20
suitable for: Rubber 3D
Input 220-240V DC - Output 24V DC - Class 2

Rubber 3D fixing profile for Track System



C-K100022
100 mm - 27 mm - 15 mm
suitable for: Rubber 3D

Rubber 3D fixing profile for Track System



C-K100021
2000 mm - 27 mm - 15 mm
suitable for: Rubber 3D

Finishes Smooth white Smooth black Transparent


INDOOR

ROLLIP	170
INK	176
NODE SYSTEM	190
SINFONIA SYSTEM	206
FYLO+	218



SYSTEMS

ROLLIP

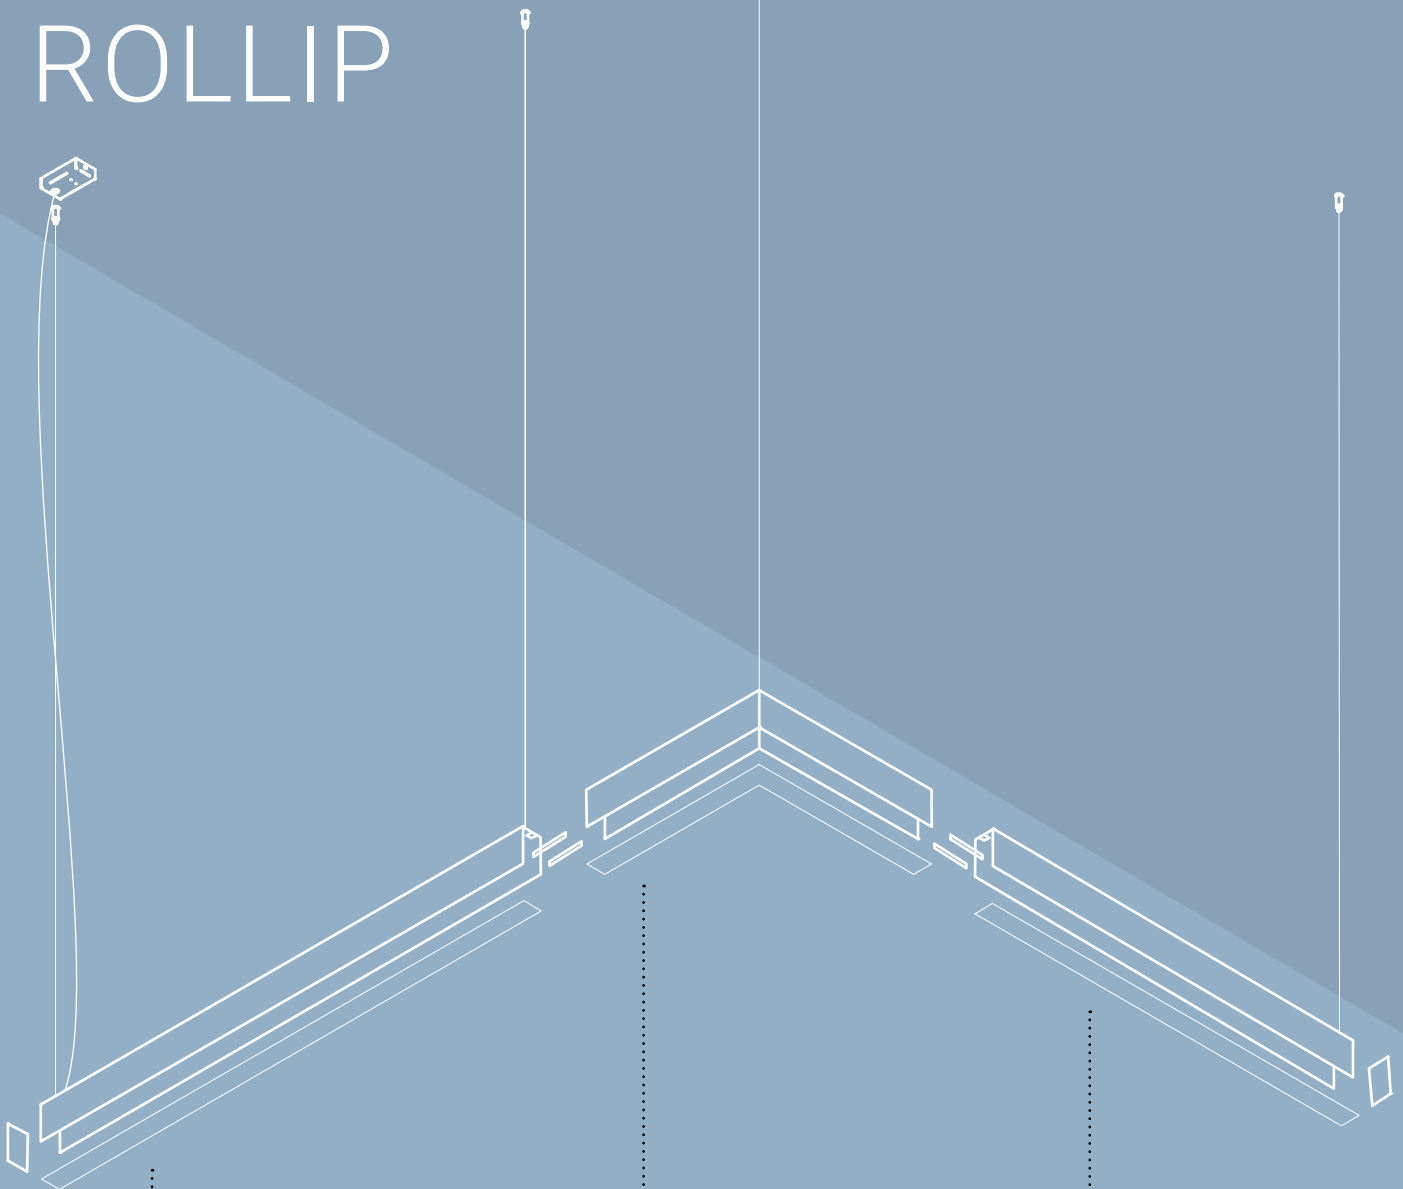

Suspended linear module (first)

Premier module à intégrer toujours avec 1 kit d'alimentation et 2 kits de suspension (un pour chaque extrémité).

First module always to be integrated with the power supply kit and 2 suspension kits (one at each end).

Suspended angular module

Kit de suspension inclus.

Suspension kit included.

Suspended linear module

À intégrer toujours avec au moins 1 kit de suspension à installer à une des extrémités.

Always to be integrated with the power supply kit and 2 suspension kits, to be installed at one of the ends.

ROLLIP_MP

Rollip permet une créativité maximale en matière de design, mettant la performance d'éclairage et la polyvalence d'installation au service de l'architecture. Un système complet conçu pour les environnements professionnels, avec des modules encastrés et suspendus de différentes longueurs et des diffuseurs opales, asymétriques ou UGR<19.


Rollip allows maximum design creativity, putting lighting performance and installation versatility at the service of architecture. A complete system designed for professional environments, with recessed and suspended modules in different lengths and opal, asymmetric or UGR<19 diffusers.

ROLLIP_MC

Roll diffuser

Permet de réaliser des lignes continues sans interruption jusqu'à 20 mètres en une seule et simple opération de montage.

It allows to obtain continuous lines measuring up to 20 metres in a single, simple assembly operation.

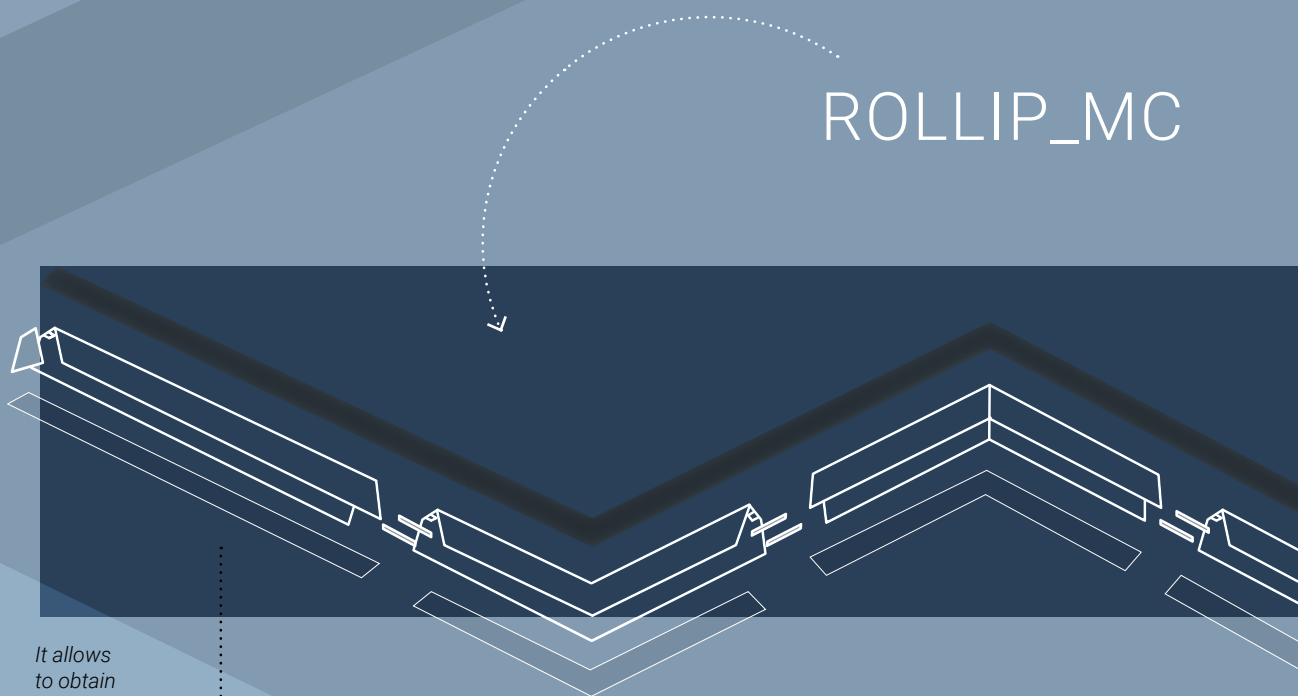





Corps en aluminium peint texturé blanc.
Diffuseurs en polycarbonate.


Body in white textured painted aluminium.
Polycarbonate diffusers.

ROLLIP



163

Rollip35_MC | V2 topLED | 48 V DC

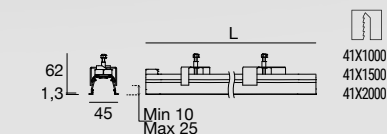


L 1000 mm - CRI 90 - 13 W DC
Opt 3000K 1759 lmS - 1367 lmD
- **C00187WHWZZ**

L 1500 mm - CRI 90 - 19,5 W DC
Opt 3000K 2639 lmS - 2050 lmD
- **C00188WHWZZ**

L 2000 mm - CRI 90 - 26 W DC
Opt 3000K 3518 lmS - 2733 lmD
- **C00189WHWZZ**

Joining kit included.
Delivered lumens measured with opal diffuser.


Rollip35_MC | V2 Corner | topLED | 48 V DC

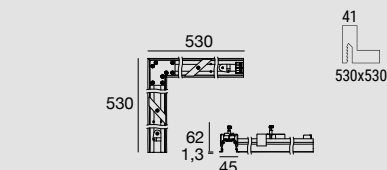

Corner L 530x530 mm - CRI 90 - 13 W DC
Opt 3000K 1759 lmS - 1367 lmD
- **C00191WHWZZ**

The composition with the angular module does not guarantee the IP54 index of protection.
Delivered lumens measured with opal diffuser.

Rollip60_MC | V2 topLED | 48 V DC

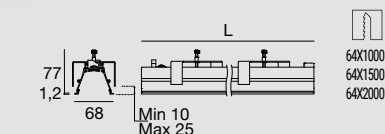


L 1000 mm - CRI 90 - 13 W DC
Opt 3000K 1759 lmS - 1570 lmD
- **C00247WHWZZ**

L 1500 mm - CRI 90 - 19,5 W DC
Opt 3000K 2639 lmS - 2355 lmD
- **C00248WHWZZ**

L 2000 mm - CRI 90 - 26 W DC
Opt 3000K 3518 lmS - 3140 lmD
- **C00249WHWZZ**

Joining kit included.
Delivered lumens measured with opal diffuser.

Rollip60_MC | V2 Corner | topLED | 48 V DC

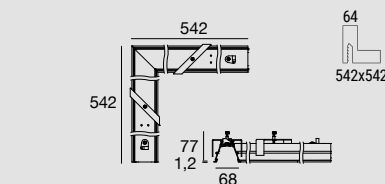

Corner L 542x542 mm - CRI 90 - 13 W DC
Opt 3000K 1759 lmS - 1570 lmD
- **C00251WHWZZ**

The composition with the angular module does not guarantee the IP54 index of protection.
Delivered lumens measured with opal diffuser.

Electronics

Rollip35_MC - Rollip60_MC | Corner
C-E300009 ON/OFF - 75W CV 48V - Φ 49
C-E300010 ON/OFF - 150W CV 48V - Φ 49
99784 ON/OFF - 150W CV 48V - Φ 80
99785 ON/OFF - 240W CV 48V - Φ 81
C-E400003 DALI/PUSH - 150W CV 48V - Φ 77

Components

Rollip35_MC | Roller diffuser
C-U200032 Asymmetric - 1,5 m
C-U200033 Asymmetric - 2 m
C-U200034 Asymmetric - 3 m
C-U200006 Asymmetric - 5 m
C-U200007 Asymmetric - 10 m
C-U200029 Opaline - 1,5 m
C-U200030 Opaline - 2 m
C-U200031 Opaline - 3 m
C-U200002 Opaline - 5 m
C-U200003 Opaline - 10 m
C-U200004 Opaline - 20 m

Rollip35_MC | Caps kit and Template
C-V400004 2 x Caps kit
C-V200001 2 x Template

Rollip60_MC | Roller diffuser
C-U200038 Asymmetric - 1,5 m
C-U200039 Asymmetric - 2 m
C-U200040 Asymmetric - 3 m
C-U200012 Asymmetric - 5 m
C-U200013 Asymmetric - 10 m
C-U200041 Opaline - 1,5 m
C-U200042 Opaline - 2 m
C-U200043 Opaline - 3 m
C-U200008 Opaline - 5 m
C-U200009 Opaline - 10 m
C-U200010 Opaline - 20 m
C-U200044 UGR<19 anti-glaring - 1,5 m
C-U200045 UGR<19 anti-glaring - 2 m
C-U200046 UGR<19 anti-glaring - 3 m
C-U200014 UGR<19 anti-glaring - 5 m
C-U200015 UGR<19 anti-glaring - 10 m

Rollip60_MC | Caps kit and Template
C-V400008 2 x Caps kit
C-V200003 2 x Template

Finishes Text white R9003
 Opaline polycarbonate





ROLLIP




163

Corps en aluminium peint texturé blanc.
Diffuseurs en polycarbonate.

Body in white textured painted aluminium.
Polycarbonate diffusers.

Rollip35_MP | V2 | double-emission topLED | 220-240 V AC



L 1500 mm - CRI 90 - 34,5 W DC - 38 W AC **

Opt 3000K 5456 lmS - 4372 lmD

— C00832WHWDZ

L 2000 mm - CRI 90 - 46 W DC - 50 W AC **


Opt 3000K 7270 lmS - 5830 lmD

— C00833WHWDZ


Joining kit included.

Delivered lumens measured with opal diffuser.

Rollip35_MP | V2 | double-emission topLED | 220-240 V AC



Non-electrifiable module




Corner L 528x528 mm - CRI 90 - 23 W DC - 25 W AC

Opt 3000K 3635 lmS - 2914 lmD

— C00834WHWDZ

Delivered lumens measured with opal diffuser.

Rollip60_MP | V2 | double-emission topLED | 220-240 V AC



L 1500 mm - CRI 90 - 34,5 W DC - 38 W AC **

Opt 3000K 5453 lmS - 4506 lmD

— C00844WHWDZ

L 2000 mm - CRI 90 - 46 W DC - 50 W AC **


Opt 3000K 7270 lmS - 6008 lmD

— C00845WHWDZ


Joining kit included.

Delivered lumens measured with opal diffuser.

Rollip60_MP | V2 | double-emission topLED | 220-240 V AC



Non-electrifiable module



Corner L 528x528 mm - CRI 90 - 23 W DC - 25 W AC

Opt 3000K 3635 lmS - 3004 lmD

— C00846WHWDZ

Delivered lumens measured with opal diffuser.

Electronics

Rollip35_MP | Rollip60_MP

64660 DALI 2 - DALI PUSH
power supply kit (+ canopy)

Components

Rollip35_MP | Roller diffuser

- C-U200032 Asymmetric - 1,5 m
- C-U200033 Asymmetric - 2 m
- C-U200034 Asymmetric - 3 m
- C-U200006 Asymmetric - 5 m
- C-U200007 Asymmetric - 10 m
- C-U200029 Opaline - 1,5 m
- C-U200030 Opaline - 2 m
- C-U200031 Opaline - 3 m
- C-U200002 Opaline - 5 m
- C-U200003 Opaline - 10 m
- C-U200004 Opaline - 20 m
- C-U200035 UGR<19 anti-glaring - 1,5 m
- C-U200036 UGR<19 anti-glaring - 2 m
- C-U200037 UGR<19 anti-glaring - 3 m
- C-U200026 UGR<19 anti-glaring - 5 m
- C-U200027 UGR<19 anti-glaring - 10 m

Rollip35_MP | Caps kit and Suspension kit

- C-V400015 2 x Caps kit
- C-F100003 Suspension kit

Rollip60_MP | Roller diffuser

- C-U200038 Asymmetric - 1,5 m
- C-U200039 Asymmetric - 2 m
- C-U200040 Asymmetric - 3 m
- C-U200012 Asymmetric - 5 m
- C-U200013 Asymmetric - 10 m
- C-U200041 Opaline - 1,5 m
- C-U200042 Opaline - 2 m
- C-U200043 Opaline - 3 m
- C-U200008 Opaline - 5 m
- C-U200009 Opaline - 10 m
- C-U200010 Opaline - 20 m
- C-U200044 UGR<19 anti-glaring - 1,5 m
- C-U200045 UGR<19 anti-glaring - 2 m
- C-U200046 UGR<19 anti-glaring - 3 m
- C-U200014 UGR<19 anti-glaring - 5 m
- C-U200015 UGR<19 anti-glaring - 10 m

Rollip60_MP | Caps kit and Suspension kit

- C-V400017 2 x Caps kit
- C-F100003 Suspension kit - 2 m max



*Le pilote présent dans l'appareil est conforme à la norme IEC 61347-2-13 annexe J, et peut donc être alimenté par des systèmes d'alimentation centralisée.

** Premier module toujours à intégrer avec kit alimentation. Tous les modules linéaires doivent être complétés par au moins un kit de suspension à installer à l'une des extrémités.

* The driver contained in the device complies with IEC 61347-2-13 annex J, and can therefore be powered by centralized power supply systems.

** First module always to be integrated with the power supply kit and 2 suspension kits. All the linear modules are to be completed with at least one suspension kit, to be installed at one of the ends. Suspension kit already included in the corner module.

Finishes

- Text white R9003
- Opaline polycarbonate

INK

Ink revisite le concept de l'appareil d'éclairage, le démonte et le remonte. La lumière devient tendue ou une ligne qui se déroule entre le mur et le plafond, permettant de couvrir et d'éclairer de grandes distances. Le câble fonctionne également comme conducteur, sur lequel il est possible de fixer différents éléments lumineux.

Ink revises the concept of the luminaire, disassembling and reassembling it. The light becomes a reworked cable system or a line that winds between the wall and the ceiling, allows you to cover and illuminate large distances. The cable also acts as a conductor on which it is possible to hook various lighting elements.

Wall/ceiling system

Après avoir fixé le profilé extrudé, le câble conducteur en caoutchouc peut être accroché et recouvrir n'importe quel mur.

After attaching the extruded profile, the rubber conductor cable can clip on and cover any wall.

Remote or visible power supply

En positionnant le driver à distance, vous pouvez partir d'une boîte de dérivation en utilisant le capot approprié. Sinon, la gamme propose le driver externe, enfermé dans un élégant boîtier, raccordable à tout point lumineux.

By positioning the power supply remotely, you can start from a junction box using the cover provided. Otherwise, the range offers the external power supply, enclosed in an elegant case, which can be connected to any light point.

Caps and fittings


Le bouchon de fermeture complète le système, tandis que les raccords en L, T ou X peuvent prolonger le parcours avec diverses ramifications.

The end cap completes the system, while the L, T or X fittings can extend the route with various branches.

Cable system

Sur le câble tendu, le conducteur permet l'insertion de la bande LED pour l'éclairage indirect des espaces. La base flexible permet la rotation et l'inclinaison du câble.

When tensioned wall-to-wall, the conductor cable provides for the insertion of the LED strip for indirect lighting. The flexible base allows rotation and tilting of the cable.

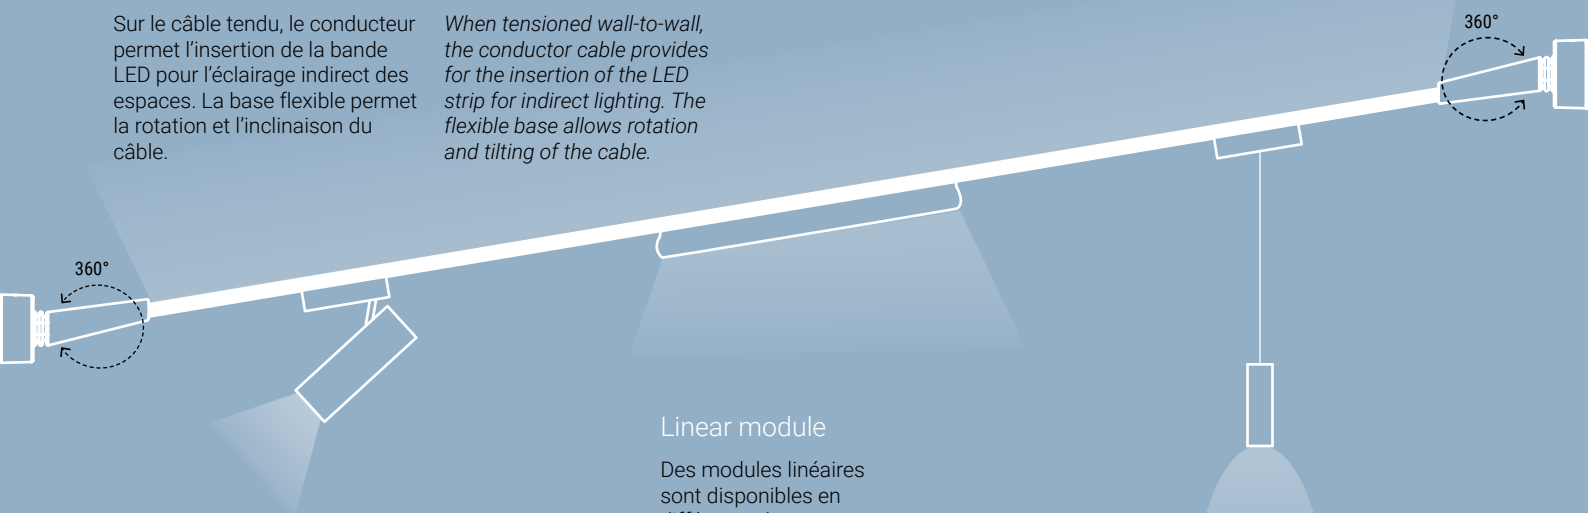

Projector

La gamme propose des projecteurs orientables dans quatre puissances différentes, même avec une optique de mise au point.

The range offers adjustable projectors in four different powers, also with focus optics.

Linear module

Des modules linéaires sont disponibles en différentes longueurs, avec une émission diffuse ou UGR<19, également suspendus.

Linear modules in various lengths with diffuse or UGR<19 emission are available, also as pendant modules.

Suspension

La suspension cylindrique combine forme et fonctionnalité, esthétique raffinée et éclairage ciblé.

The cylindrical pendant combines form and function, refined aesthetics and punctual lighting.



Les connecteurs à broches s'enfoncent dans le câble conducteur, alimentant le module d'éclairage. Une fois l'emplacement choisi, il suffit **a)** de l'insérer dans le câble en appliquant une légère pression, **b)** de fermer l'écrou de sécurité.

*The pin plugs fit into the conductor cable, powering the light module. Once you have chosen where to place the article, simply **a)** insert it into the cable by applying light pressure, **b)** close the grub screw.*






Câble conducteur en caoutchouc thermoplastique blanc ou noir.
Profilé en aluminium anodisé noir.
Cache du boîtier du driver en métal peint texturé blanc ou noir.
Boîte de dérivation en polycarbonate blanc ou noir.

*Conductive cable in white or black thermoplastic rubber.
Extruded in black anodised aluminium.
Driver housing cover in white or black textured painted metal.
Junction box in white or black polycarbonate.*




Ink system
Cable



L	
5+1 m	83412
5+1 m	81410
10+1 m	83413
10+1 m	81411
1 m *	83414
1 m *	84016

* Only for surface mounting

Ink system
Wall / ceiling extruded



	81430	Kit 2 x
	81426	Kit 5 x

Ink system
ON/OFF driver with cover | 220-240 V AC



L		
470	83415	120 W
470	81413	120 W
470	83416	180 W
470	81414	180 W

Canopy for wall or ceiling installation

The canopy allows for the possibility to feed Ink from both sides.




L		
465	83429	120 W
465	83428	120 W
510	83431	180 W
510	83430	180 W

2m cable included

The canopy allows for the possibility to feed Ink from both sides.

Ink system
Junction box



	83417
	81424

Remote driver required



Electronics

Remote ON/OFF driver | 220-240 V AC
81416 300 mm - 120 W - Output 24V DC
81417 345 mm - 180 W - Output 24 V DC

Accessories

81427 Cable shear
84010 Kit 3 brackets x 2 profiles
84011 Kit 3 brackets x 5 profiles


Finishes Text white R9003
 Text black R9005






Accessoires de jonction pour câble
connecteur en polycarbonate blanc ou noir.

*Cable connector accessories in white
or black polycarbonate.*

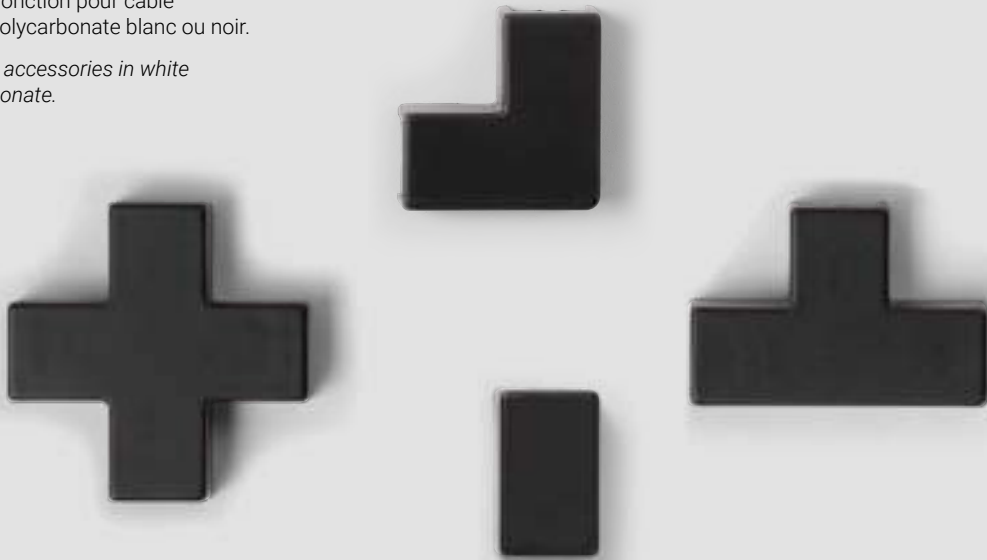


Ink system
Cross fitting




White	83418
Black	81418

Ink system
L-shaped fitting



White	83419
Black	81419

Ink system
T-shaped fitting




White	83420
Black	81420

Ink system
Wall / ceiling sealing cap



White	83421
Black	81421

Ink system
Clips for curves



White	83422	2x kit
Black	84017	2x kit






INK
SYS
TEM


Bande LED en polyuréthane blanc. Capot pour câble tendu traversant le plâtre en métal peint texturé blanc ou noir. Câble de support en acier. Fixation murale articulée pour câble tendu avec base en polycarbonate et embout flexible en caoutchouc, en blanc ou noir.

StripLED in white polyurethane. Cover for through cable on plasterboard in white or black textured painted metal. Steel support cable. Swivel wall fixing for cable installation with polycarbonate base and flexible rubber element, in white or black.



Ink system

Swivel wall fixing




White	83424	2x kit
Black	81423	2x kit



Ink system


Cardboard fixing



White	83423	2x kit
Black	81422	2x kit

Ink system

Steel support and cable





White	83425	
Black	81425	
White	83427	*
Black	83426	*

* Le support traversant permet la continuité du module réglette.
 * The pass-through support allows the continuity of the strip module.

Ink system

LED Strip CRI 90 | 24 V DC



H 6,2 mm - for white cable

L 1000 - Hi-Flux 12,6 W/m DC

Opt 2700K 1435 lmS - 1081 lmD

DI C0060MDI01019

Opt 3000K 1510 lmS - 1138 lmD

DI C0060WDI01019

L 2500 - Hi-Flux 12,6 W/m DC

Opt 2700K 3588 lmS - 2703 lmD

DI C0060MDI02519

Opt 3000K 3777 lmS - 2845 lmD

DI C0060WDI02519

L 5000 - Hi-Flux 12,6 W/m DC

Opt 2700K 7166 lmS - 5405 lmD

DI C0060MDI05019

Opt 3000K 7544 lmS - 5690 lmD

DI C0060WDI05019

H 3 mm - for black cable

L 1000 - Hi-Flux 12,6 W/m DC

Opt 2700K 1435 lmS - 1081 lmD

DI 82949M00

Opt 3000K 1510 lmS - 1138 lmD

DI 82949W00

L 2500 - Hi-Flux 12,6 W/m DC

Opt 2700K 3588 lmS - 2703 lmD

DI 82950M00

Opt 3000K 3777 lmS - 2845 lmD

DI 82950W00

L 5000 - Hi-Flux 12,6 W/m DC

Opt 2700K 7166 lmS - 5405 lmD

DI 82951M00

Opt 3000K 7544 lmS - 5690 lmD

DI 82951W00

Finishes Smooth white
 Smooth black





Modules linéaires en aluminium peint texturé blanc ou noir.
 Diffuseurs en polyméthacrylate de méthyle opale.

*Linear modules in white or black textured painted aluminium.
 Opal polymethylmethacrylate diffusers.*

Ink system

Diffused linear module | CRI 90
 24 V DC



L 320 - 11 W DC

Opt	2700K 988 lmS - 619 lmD
DI	77582M00
DI	83943M00

Opt	3000K 1040 lmS - 652 lmD
DI	77582W00
DI	83943W00

L 620 - 22 W

Opt	2700K 1976 lmS - 1283 lmD
DI	77583M00
DI	83944M00

Opt	3000K 2081 lmS - 1350 lmD
DI	77583W00
DI	83944W00


L 920 - 33 W

Opt	2700K 2964 lmS - 1886 lmD
DI	77584M00
DI	83945M00

Opt	3000K 3120 lmS - 1985 lmD
DI	77584W00
DI	83945W00

Ink system_L UGR

Anti-glaring linear module | CRI 90
 24 V DC



L 300 - 7 W DC

Opt	2700K 609 lmS - 247 lmD
DI	77585M30
DI	82918M30

Opt	3000K 641 lmS - 260 lmD
DI	77585W30
DI	82918W30


L 600 - 14 W

Opt	2700K 1217 lmS - 494 lmD
DI	77586M30
DI	82920M30

Opt	3000K 1282 lmS - 520 lmD
DI	77586W30
DI	82920W30

Ink system_L

Linear module | CRI 90
 24 V DC



L 300 - 11 W DC

Opt	2700K 988 lmS - 376 lmD
DI	77587M00
DI	82914M00

Opt	3000K 1040 lmS - 396 lmD
DI	77587W00
DI	82914W00

L 600 - 22 W

Opt	2700K 1976 lmS - 751 lmD
DI	77588M00
DI	82916M00

Opt	3000K 2081 lmS - 791 lmD
DI	77588W00
DI	82916W00


Finishes Text white R9003
 Text black R9005






Modules suspendus en aluminium peint texturé blanc ou noir.

Pendant modules in white or black textured painted aluminium.

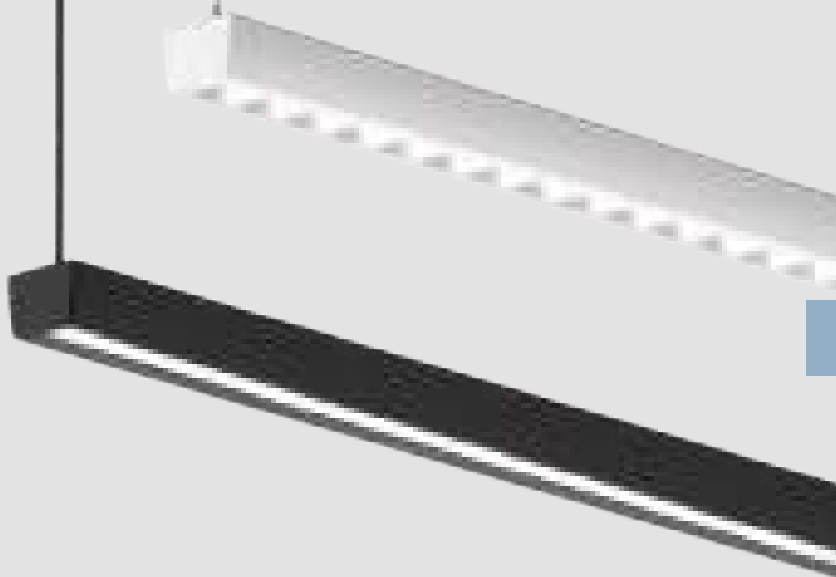

Ink system_LP UGR

Anti-glaring linear Suspension | CRI 90
24 V DC



L 300 - 7 W DC

Opt 2700K 742 lmS - 260 lmD
 33x37° **77589M30**
 33x37° **82932M30**

Opt 3000K 781 lmS - 274 lmD
 33x37° **77589W30**
 33x37° **82932W30**


L 600 - 14 W

Opt 2700K 990 lmS - 334 lmD
 33x37° **77590M30**
 33x37° **82944M30**

Opt 3000K 1042 lmS - 352 lmD
 33x37° **77590W30**
 33x37° **82944W30**

Ink system_LP

Linear Suspension | CRI 90
24 V DC



L 900 - 11 W DC

Opt 2700K 1978 lmS - 702 lmD
 DI **77591M00**
 DI **82928M00**

Opt 3000K 2082 lmS - 739 lmD
 DI **77591W00**
 DI **82928W00**


L 1200 - 29 W

Opt 2700K 2607 lmS - 902 lmD
 DI **77592M00**
 DI **82930M00**

Opt 3000K 2744 lmS - 950 lmD
 DI **77592W00**
 DI **82930W00**

Ink system_P

Suspension | CRI 90
24 V DC




L 104 - 6 W DC

Opt 2700K 674 lmS - 445 lmD
 47° **77593M45**
 47° **82926M45**


Opt 3000K 709 lmS - 468 lmD
 47° **77593W45**
 47° **82926W45**

Finishes Text white R9003
 Text black R9005

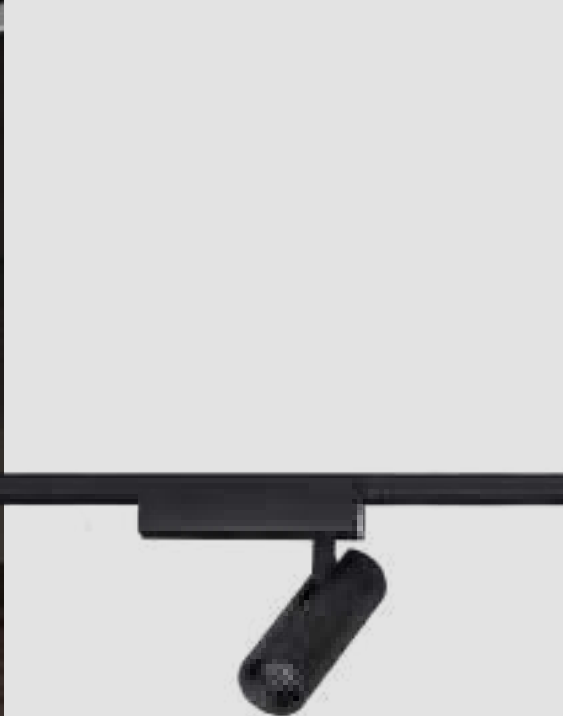

Ink system_SP

Projector | CRI 90 | 24 V DC - 6 W DC



L 104


Opt	2700K 674 lmS - 418 lmD
	77594M10
	82922M10
	77594M30
	82922M30
	77594M45
	82922M45

Opt	3000K 709 lmS - 441 lmD
	77594W10
	82922W10
	77594W30
	82922W30
	77594W45
	82922W45




Projecteurs en aluminium peint texturé blanc ou noir.

Projectors in white or black textured painted aluminium.



Ink system_SP

Projector | CRI 90 | 24 V DC - 10 W DC




L 104

Opt	2700K 1015 lmS - 630 lmD
31°	77595M30
31°	83946M30
42°	77595M45
42°	83946M45

Opt	3000K 1068 lmS - 663 lmD
31°	77595W30
31°	83946W30
42°	77595W45
42°	83946W45

Ink system_SP Focus

Projector | CRI 90 | 24 V DC - 12 W DC




L 104

Opt	2700K 1173 lmS - 1063 lmD
16-35°	77596M85
16-35°	83947M85

Opt	3000K 1234 lmS - 1119 lmD
16-35°	77596W85
16-35°	83947W85

Ink system_SP

Projector | CRI 90 | 24 V DC - 22 W DC



L 114

Opt	2700K 2407 lmS - 1877 lmD
21°	77597M20
21°	83948M20
31°	77597M35
31°	83948M35
62°	77597M60
62°	83948M60

Opt	3000K 2534 lmS - 1977 lmD
21°	77597W20
21°	83948W20
31°	77597W35
31°	83948W35
62°	77597W60
62°	83948W60

Finishes Text white R9003
 Text black R9005

NODE SYSTEM





Discover more



La caractéristique distinctive de Node System réside dans sa liberté de mouvement absolue, avec la possibilité de tourner à 360 degrés et de s'orienter dans n'importe quelle direction, sans aucune contrainte. La conduction électrique et la transmission du signal DALI sont assurées par les révolutionnaires Pogo Pin, des contacts à ressort de précision qui garantissent une transmission stable et ininterrompue.

The distinctive feature of the Node System lies in the absolute freedom of movement, with the ability to rotate 360 degrees and orient itself in any direction, without any constraints. Electrical current and the DALI signal transmission are managed by the revolutionary Pogo Pin, precision spring contacts that ensure stable and uninterrupted transmission.

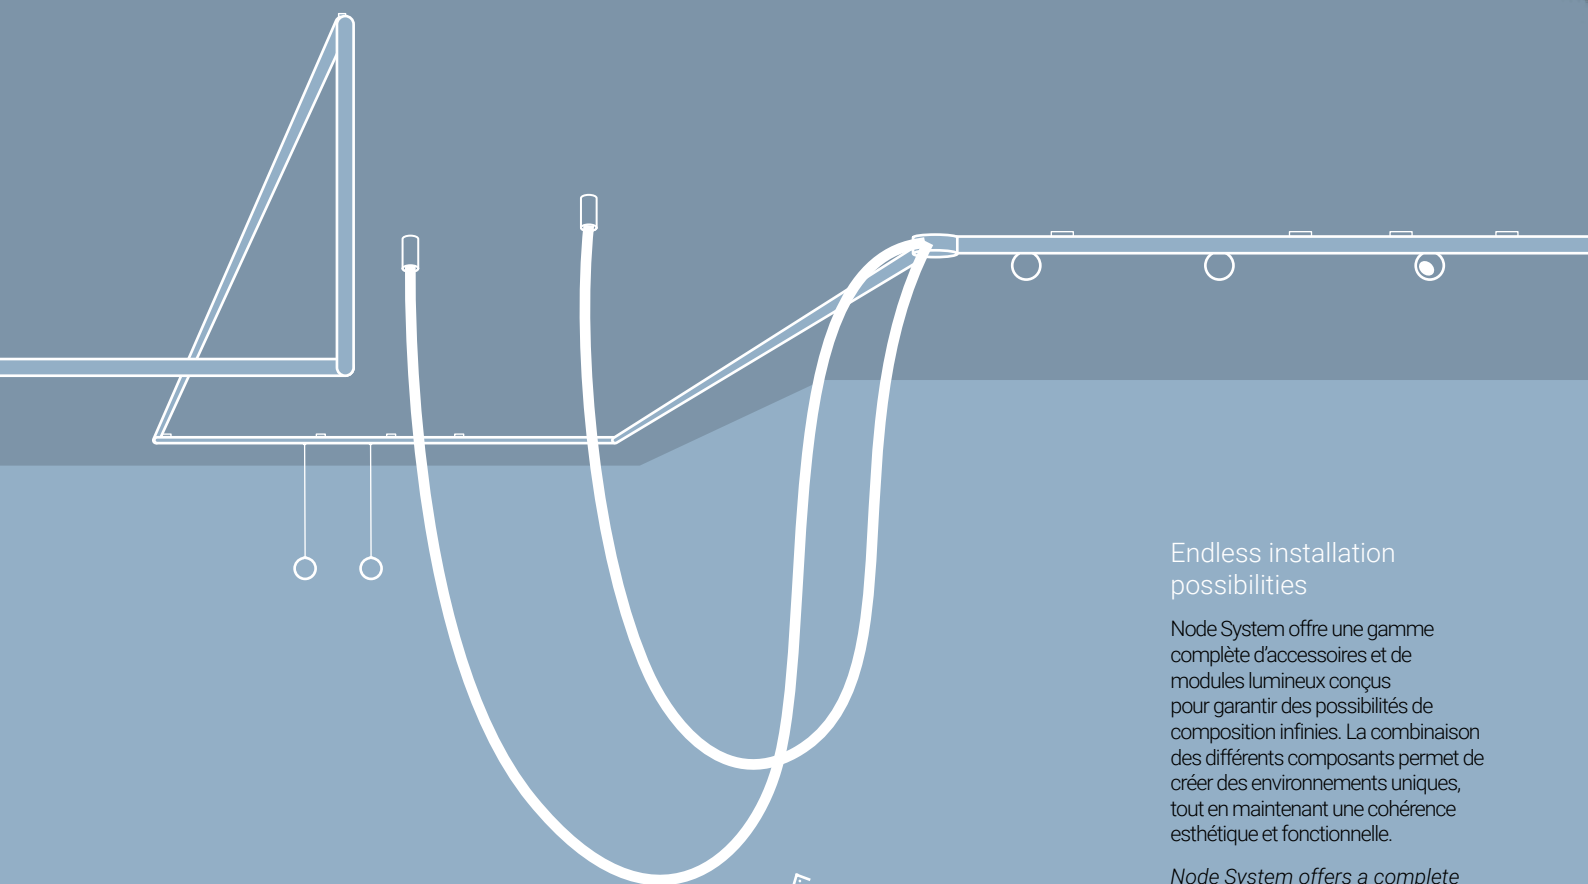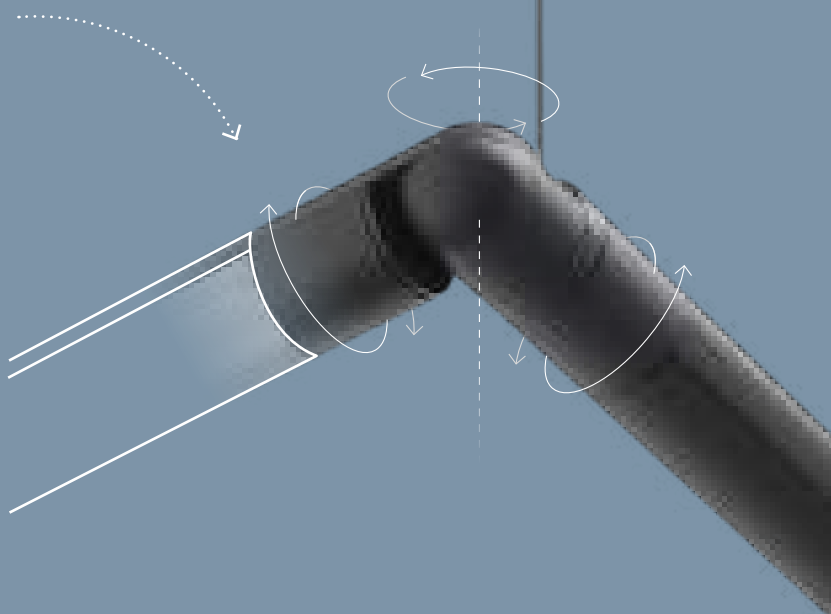

Endless installation possibilities

Node System offre une gamme complète d'accessoires et de modules lumineux conçus pour garantir des possibilités de composition infinies. La combinaison des différents composants permet de créer des environnements uniques, tout en maintenant une cohérence esthétique et fonctionnelle.

Node System offers a complete range of accessories and light modules designed to ensure endless composition possibilities. The combination of the various components allows you to create unique settings, while maintaining an aesthetic and functional consistency.


LIGHT MODULES

48V




Module lumière diffuse de 11W DC à 32W DC.
L 629 mm / L 1188 mm / L 1748 mm.

*Diffused light linear module from 11W DC to 32W DC.
L 629 mm / L 1188 mm / L 1748 mm.*



Module micro-cellulaire Comfort UGR<19 de 12W DC à 33W DC. L 629 mm / L 1188 mm / L 1748 mm.

*Comfort micro-cell module UGR<19 12W DC - 33W DC.
L 629 mm / L 1188 mm / L 1748 mm.*



Module micro-cellulaire Comfort UGR<19 + lumière diffuse indirecte. De 48W DC à 64W DC. L 1188 mm / L 1748 mm.

*Comfort micro-cell module UGR<19 + indirect diffused light. From 48W DC to 64W DC.
L 1188 mm / L 1748 mm*



Module Projecteur suspendu
6W DC - Ø 70 mm

*Pendant projector module
6W DC - Ø 70 mm*



Module Projecteur suspendu
11W DC - Ø 80 mm

*Pendant projector module
11W DC - Ø 80 mm*




Module Projecteur
6W DC - Ø 70 mm

*Projector module
6W DC - Ø 70 mm*



Module Projecteur
11W DC - Ø 80 mm

*Projector module
11W DC - Ø 80 mm*

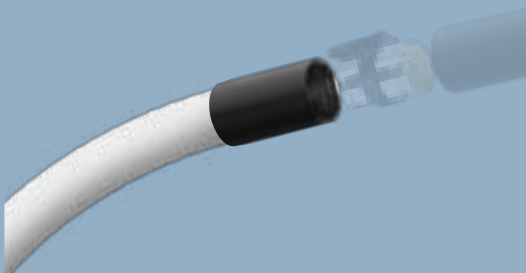

Module flexible Rubber_O de 30W DC à 120W DC.
L 2500 mm / L 5000 mm / L 10000 mm

L'appareil ne permet un raccordement électrique que d'un seul côté et doit être complété par les accessoires de raccordement au Rubber_O appropriés.

*Rubber_O flexible module from 30W DC to 120W DC.
L 2500 mm / L 5000 mm / L 10000 mm*

The fixture only allows the electrical connection on one side and must be completed with the relevant Rubber_O accessories.

Module binaire électrifié Electrified track module




Module binaire électrifié pour projecteurs. Il peut être utilisé comme module aveugle électrifié (à associer à l'accessoire Couverture binaire).

L 629 mm max 2 appareils
L 1188 mm max 4 appareils
L 1748 mm max 6 appareils

Electrified track module for projectors. It can be used as an electrified blind module (to be combined with the Track Cover accessory).

*L 629 mm max 2 luminaires
L 1188 mm max 4 luminaires
L 1748 mm max 6 luminaires*



Accessoire couverture pour module binaire. Peut être coupée en fonction du nombre d'appareils installés.

L 1119 mm / L 1679 mm


Accessory cover for track module. It can be cut according to the number of luminaires installed.

L 1119 mm / L 1679 mm.

JUNCTION & CONNECTION ACCESSORIES



Embout de fermeture à suspension.
Suspended blanking cap.



Joint linéaire à suspension.
Suspended linear joint.



Articulation réglable (axe horizontal) à suspension.
Suspended adjustable joint (horizontal axis).




Joint en T à suspension.
Suspended T-shaped joint.



Embout d'alimentation ligne à suspension.
Suspended line power supply plug.



Joint d'alimentation central à suspension.
Suspended central power supply joint.



Alimentation sur articulation réglable (axe horizontal) à suspension.
Power supply on suspended adjustable joint (horizontal axis).



Joint d'alimentation en T à suspension.
Suspended T-shaped power supply joint.



Embout de fermeture mur/plafond.
Wall/ceiling blanking cap.



Joint linéaire mur/plafond.
Wall/ceiling linear joint.




Connecteur pour alimentation par driver avec cover mur/plafond.
Connector, for power supply for driver with wall/ceiling cover.




Connecteur pour alimentation à rosace multiple.
Connector for power supply from multiple rosette.

x 8 Connector max




Articulation réglable (axe horizontal) mur/plafond.
Wall/ceiling adjustable joint (horizontal axis).



Articulation réglable (axe vertical) mur/plafond.
Wall/ceiling adjustable joint (vertical axis).




Joint en T suspension, mur/plafond.
Wall/ceiling T-shaped joint.



Rosace multiple max 8 connexions.
Multiple rose max 8 connections.




ON/OFF driver avec couverture - mur/plafond.
ON/OFF driver with cover - wall/ceiling.



ON/OFF driver avec couverture - suspension.
ON/OFF driver with cover - suspension.

Les accessoires de jonction permettent la continuité électrique entre les modules linéaires, cependant avec l'accessoire inclus il est possible d'interrompre la ligne à partir d'un des deux pôles.
The connectors allow electrical continuity between the linear modules, however, it is possible to interrupt the line from one of the two poles with the accessory provided.





Modules en aluminium peint texturé blanc ou noir. Diffuseur pour émission diffuse en polycarbonate. Diffuseur pour module confort composé de microcellules en aluminium peint noir.


White or black textured painted aluminium modules. Polycarbonate diffuser for diffused emission. Diffuser for comfort module made of black painted aluminium microcells.

NODE SYSTEM

**SYS
TEM**

Node System_L

Diffused light linear module | CRI 90
48V DC



L 629 mm - 11 W DC

Opt	2700K 1812 lmS - 1054 lmD
DI	76372M00
DI	76373M00

Opt	3000K 1923 lmS - 1098 lmD
DI	76372W00
DI	76373W00

L 1188 mm - 23 W DC

Opt	2700K 3624 lmS - 2108 lmD
DI	76374M00
DI	76375M00

Opt	3000K 3826 lmS - 2197 lmD
DI	76374W00
DI	76375W00


L 1748 mm - 31 W DC

Opt	2700K 5436 lmS - 2810 lmD
DI	76376M00
DI	76377M00

Opt	3000K 5739 lmS - 2928 lmD
DI	76376W00
DI	76377W00

Node System_L Comfort

Single-emission linear module | CRI 90
48V DC



L 629 mm - 12 W DC

Opt	2700K 1778 lmS - 1047 lmD
49°	76378M50
49°	76379M50

Opt	3000K 1887 lmS - 1090 lmD
49°	76378W50
49°	76379W50

L 1188 mm - 24 W DC

Opt	2700K 3556 lmS - 2093 lmD
49°	76380M50
49°	76381M50

Opt	3000K 3754 lmS - 2180 lmD
49°	76380W50
49°	76381W50


L 1748 mm - 32 W DC

Opt	2700K 5334 lmS - 2766 lmD
49°	76382M50
49°	76383M50

Opt	3000K 5631 lmS - 2881 lmD
49°	76382W50
49°	76383W50

Node System_L


Electrified track module | 48V DC



L		
629 mm	83309	max 2 x spotlights or suspension spotlights
629 mm	83310	
1188 mm	83311	max 4 x spotlights or suspension spotlights
1188 mm	83312	
1748 mm	83313	max 6 x spotlights or suspension spotlights
1748 mm	83314	

Node System_L Comfort

Double-emission linear module | CRI 90
48V DC



L 1188 mm - 24 W DC

Opt	2700K 7142 lmS - 4640 lmD
49°+DI	76384M61
49°+DI	76385M61

Opt	3000K 7540 lmS - 4833 lmD
49°+DI	76384W61
49°+DI	76385W61

L 1748 mm - 32 W DC

Opt	2700K 10713 lmS - 6132 lmD
49°+DI	76386M61
49°+DI	76387M61

Opt	3000K 11310 lmS - 6387 lmD
49°+DI	76386W61
49°+DI	76387W61

Node System_L

Track cover



	83316	1119 mm
	83317	1119 mm
	83318	1679 mm
	83319	1679 mm

Components
page 203-205

Electronics
page 201

Finishes Text white R9003
 Text black R9005






Modules en aluminium peint texturé blanc ou noir.
Module Rubber_O réalisé en un matériau spécial très flexible.

White or black textured painted aluminium modules.
Rubber_O module made of a special, highly flexible material.

NODE SYSTEM


SYS
TEM

Node System_SP
Projector module | CRI 90 | 48V DC

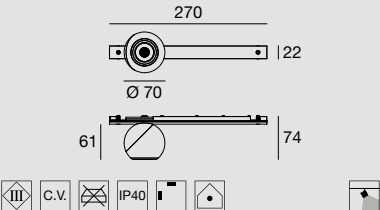


5 W DC	
Opt	2700K 603 lmS - 543 lmD
17°	76420M15
17°	76421M15
34°	76420M35
34°	76421M35
63°	76420M60
63°	76421M60
Opt 3000K 621 lmS - 559 lmD	
17°	76420W15
17°	76421W15
34°	76420W35
34°	76421W35
63°	76420W60
63°	76421W60

Node System_SP
Projector module | CRI 90 | 48V DC

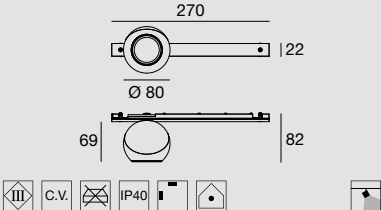

10 W DC	
Opt	2700K 959 lmS - 863 lmD
16°	76422M15
16°	76423M15
34°	76422M35
34°	76423M35
58°	76422M60
58°	76423M60
Opt 3000K 988 lmS - 889 lmD	
16°	76422W15
16°	76423W15
34°	76422W35
34°	76423W35
58°	76422W60
58°	76423W60

Rubber_O
topLED CRI 90 | 48 V DC | 12 W/m

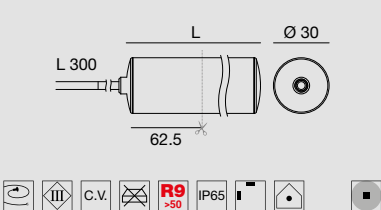

L	2700K 1538 lmS/m - 1150 lmD/m
2,5 m - 30 W	C0020MDI02517
5 m - 60 W	C0020MDI05017
10 m - 120 W	C0020MDI10017
L	3000K 1654 lmS/m - 1256 lmD/m
2,5 m - 30 W	C0020WDI02517
5 m - 60 W	C0020WDI05017
10 m - 120 W	C0020WDI10017
L	4000K 1770 lmS/m - 1284 lmD/m
2,5 m - 30 W	C0020NDI02517
5 m - 60 W	C0020NDI05017
10 m - 120 W	C0020NDI10017

Le module Rubber_O ne peut être utilisé que dans des installations murales/plafond (il ne peut pas être installé sur des configurations suspendues). Pour connecter Rubber_O au système, utiliser les accessoires de raccordement.

The Rubber_O module can be only be used in the wall/ceiling installations (it cannot be installed on pendant configurations). Use the appropriate connection accessories to join Rubber_O to the system.



Flexlights - Ribbon
page 685

Components
page 203-205

Electronics
page 201

Accessories Rubber_O


83297	Wall/ceiling conn.
83298	Wall/ceiling conn.
C-K400076	Kit 5 round
C-K400077	Kit 1 round + cable 2 poles
C-K400080	Silicone glue for sealing

Finishes Text white R9003
 Text black R9005




Modules en aluminium peint texturé blanc ou noir.
White or black textured painted aluminium modules

Node System_P
Pendant projector module | CRI 90
48V DC



5 W DC	
Opt	2700K 603 lmS - 543 lmD
17°	76428M15
17°	76429M15
34°	76428M35
34°	76429M35
63°	76428M60
63°	76429M60
Opt	3000K 621 lmS - 559 lmD
17°	76428W15
17°	76429W15
34°	76428W35
34°	76429W35
63°	76428W60
63°	76429W60

Node System_P
Pendant projector module | CRI 90
48V DC



10 W DC	
Opt	2700K 959 lmS - 863 lmD
16°	76430M15
16°	76431M15
34°	76430M35
34°	76431M35
58°	76430M60
58°	76431M60
Opt	3000K 988 lmS - 889 lmD
16°	76430W15
16°	76431W15
34°	76430W35
34°	76431W35
58°	76430W60
58°	76431W60






Composants en aluminium peint texturé blanc ou noir.
White or black textured painted aluminium components.

NODE SYSTEM

SYS
TEM

Node System
Multiple rose max 8 connections



Input 48V DC

83254

83255

Node System
ON/OFF driver with cover - wall/ceiling



C.V.


IP20

100W - Output 48V DC - Input 220-240V AC

83256

83257

Node System
ON/OFF driver with cover - wall/ceiling



C.V.

IP20

150W - Output 48V DC - Input 220-240V AC

83260

83261

240W - Output 48V DC - Input 220-240V AC

83264

83265

Node System
ON/OFF driver with cover - suspension



C.V.

IP20

100W - Output 48V DC - Input 220-240V AC

83258

83259

Node System
ON/OFF driver with cover - suspension



C.V.

IP20

150W - Output 48V DC - Input 220-240V AC

83262

83263

240W - Output 48V DC - Input 220-240V AC

83266

83267

Electronics

Remote ON/OFF driver | 220-240 V AC
99784 219 mm - 150 W - Output 48V DC
99785 244 mm - 240 W - Output 48V DC



Composants en aluminium peint texturé blanc ou noir.
White or black textured painted aluminium components.






Composants en aluminium peint texturé blanc ou noir.

White or black textured painted aluminium components.

NODE SYSTEM




Node System
Wall/ceiling blanking cap




- 83287
- 83288

Node System
Wall/ceiling linear joint




- 83291
- 83292

Node System
Wall/ceiling adjustable joint (horizontal axis)




- 83283
- 83284

Node System
Wall/ceiling adjustable joint (vertical axis)




- 83285
- 83286

Node System
Wall/ceiling T-shaped joint



- C-U500008
- C-U500009


Node System
Connector for multiple rose



- 83295
- 83296

To be completed with: driver with cover - suspension

Node System
Connector for driver with cover - wall/ceiling




- 83293
- 83294

To be completed with: driver with cover - wall/ceiling

SINFONIA SYSTEM

Le système Sinfonia inclut des lampes de formes, tailles et finitions diverses qui se combinent comme des notes sur une partition. Il est possible de réaliser différentes compositions, des simples décentrages jusqu'à de magnifiques scénographies en cascade, créant une symphonie lumineuse personnelle.

The Sinfonia system includes lamps of different shapes, sizes and finishes that combine like notes on a score. Various compositions can be realised, from simple off-centre settings to stunning cascades, creating a personal symphony of light.

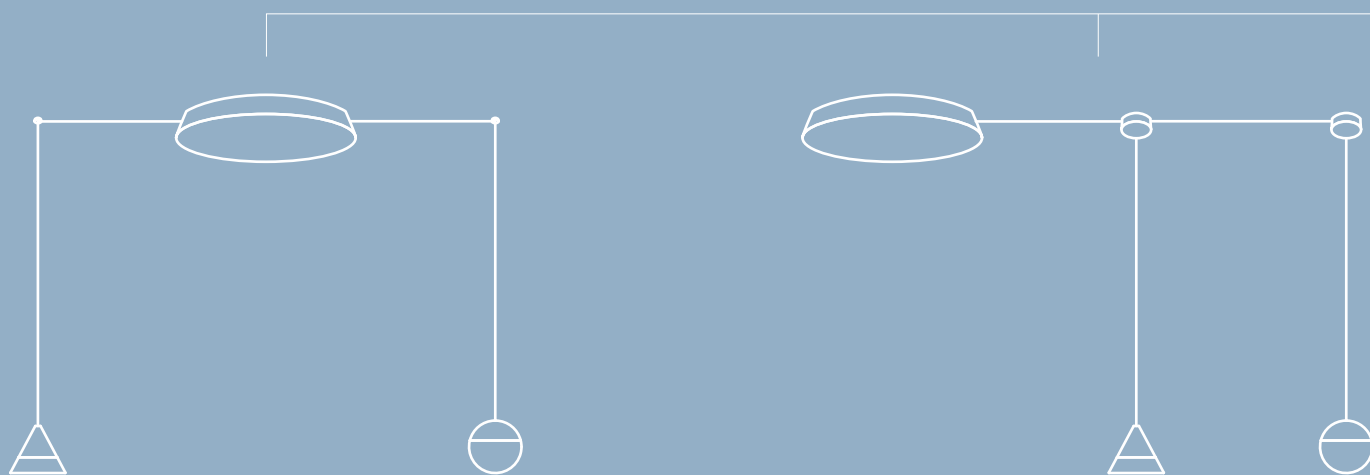

BASIC COMPOSITION

MASTER CANOPY
+
LAMPS
(x1 decentraliser included
in every lamp)

LINEAR COMPOSITION

MASTER CANOPY
+
SLAVE CANOPIES
+
ADDITIONAL
CONNECTION CABLE
(for slave-to-slave
connections)
+
LAMPS

Sinfonia System | Basic or linear

Dans la composition de base, à chaque sortie du rosace maître, il est possible d'associer une lampe. Dans la composition linéaire, il est possible de créer des lignes de lampes disposées en série.

In the basic composition, you can associate a lamp for each master canopy output.
In the linear composition, you can create lines of lamps arranged in series.

Master Canopy


Les trois rosaces maîtres disponibles permettent de connecter jusqu'à 6, 12 ou 24 lampes Sinfonia.

The three available master canopies allow the connection of up to 6, 12 or 24 Sinfonia lamps.

6 LIGHTS

12 LIGHTS

24 LIGHTS

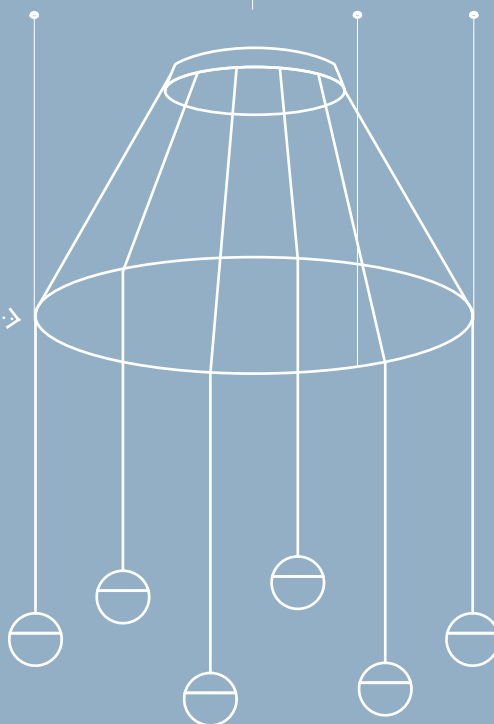

Ø 500

Ø 700

Ø 900

Ø 1200

400X1000

400X1200

400X1400


Sinfonia System | Ring

Sept structures portantes en anneau, quatre rondes et trois rectangulaires, installables en suspension ou avec fixations rigides, permettent de créer des compositions scénographiques en cascade.

Seven ring-shaped supporting structures, four round and three rectangular, which can be suspended or rigidly fixed, allow to create spectacular cascading compositions.

RING COMPOSITION

MASTER CANOPY
+
RING
(round or rectangular)
+
FIXING COMPONENTS
(pendant cables or ceiling brackets)
+
LAMPS

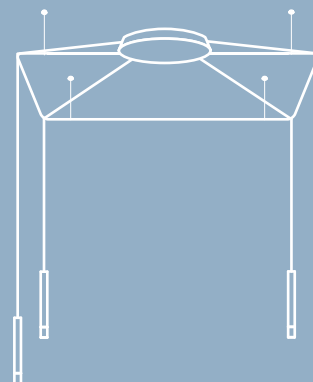




Rosace en métal peint texturé blanc ou noir, ou dans des finitions galvanisées chrome et or brossé.

Canopy in white or black textured painted metal, or in the galvanic chrome and brushed gold finishes.

SINFONIA SYSTEM




Master canopy 6 lights 220-240 V





- CA103DWHEZZ
- CA103DBBEZZ
- CA103DCHEZZ
- CA103DHGEZZ

Master canopy 12 lights 220-240 V



- CA104DWHEZZ
- CA104DBBEZZ
- CA104DCHEZZ
- CA104DHGEZZ

Master canopy 24 lights 220-240 V



- CA105DWHEZZ
- CA105DBBEZZ
- CA105DCHEZZ
- CA105DHGEZZ

Slave canopy Required for linear compositions



- CA106RWHEZZ
- CA106RBBEZZ
- CA106RCHEZZ
- CA106RHGEZZ

Accessories

- KIT0110 Decentraliser (1x)
- KIT0106 Additional connection cable






Anneau en métal peint texturé noir.

Ring in black textured painted metal.


SINFONIA SYSTEM

**SYS
TEM**


Round ring - Ø 500 mm


C-V100005


Round ring - Ø 700 mm


C-V100006


Round ring - Ø 900 mm


C-V100007


Round ring - Ø 1200 mm


C-V100008

Rectangular ring - 400x1000 mm


C-F600004

Rectangular ring - 400x1200 mm


C-F600005

Rectangular ring - 400x1400 mm


C-F600006

Pour les compositions avec des anneaux suspendus, utilisez les câbles en acier C-F100004, capables de relier plusieurs anneaux ensemble. Pour installer un anneau directement au plafond, utilisez les supports de fixation rigides C-F600003.

For compositions with suspended rings use the steel cables C-F100004, capable of connecting multiple rings together. To create a ceiling ring use the rigid fixing brackets C-F600003.

Fixing components for rings

- C-F100004** x1 Pendant cable 10m
- C-F600003** x1 Ceiling bracket 105 mm

x3 C-F100004 or C-F600003 required for

- C-V100005 Round ring Ø 500 mm
- C-V100006 Round ring Ø 700 mm

x5 C-F100004 or C-F600003 required for

- C-V100007 Round ring Ø 900 mm
- C-V100008 Round ring Ø 1200 mm

x4 C-F100004 or C-F600003 required for

- C-F600004 Rect. ring 400x1000 mm
- C-F600005 Rect. ring 400x1200 mm
- C-F600006 Rect. ring 400x1400 mm





Corps en aluminium peint texturé blanc ou noir, ou dans des finitions galvanisées chrome et or brossé. Diffuseur en polyméthacrylate.

Body in white or black textured painted aluminium, or in the galvanic chrome and brushed gold finishes. Diffuser in polymethylmethacrylate.

SINFONIA SYSTEM



259



Puccini

topLED CRI 90 | 24 V DC | 4 W DC





Opt	2700K 302 lmS - 218 lmD
DI	CA107DWHMDI
DI	CA107DBBMDI
DI	CA107DCHMDI
DI	CA107DHGMDI

Opt	3000K 318 lmS - 229 lmD
DI	CA107DWHWDI
DI	CA107DBBWDI
DI	CA107DCHWDI
DI	CA107DHGWDI

Puccini

topLED CRI 90 | 24 V DC | 4 W DC





Opt	2700K 302 lmS - 218 lmD
DI	CA108DWHMDI
DI	CA108DBBMDI
DI	CA108DCHMDI
DI	CA108DHGMDI

Opt	3000K 318 lmS - 229 lmD
DI	CA108DWHWDI
DI	CA108DBBWDI
DI	CA108DCHWDI
DI	CA108DHGWDI

Puccini

topLED CRI 90 | 24 V DC | 6 W DC





Opt	2700K 475 lmS - 368 lmD
DI	CA109DWHMDI
DI	CA109DBBMDI
DI	CA109DCHMDI
DI	CA109DHGMDI

Opt	3000K 500 lmS - 388 lmD
DI	CA109DWHWDI
DI	CA109DBBWDI
DI	CA109DCHWDI
DI	CA109DHGWDI

Puccini

topLED CRI 90 | 24 V DC | 6 W DC



Opt	2700K 475 lmS - 368 lmD
DI	CA110DWHMDI
DI	CA110DBBMDI
DI	CA110DCHMDI
DI	CA110DHGMDI

Opt	3000K 500 lmS - 388 lmD
DI	CA110DWHWDI
DI	CA110DBBWDI
DI	CA110DCHWDI
DI	CA110DHGWDI

Components

page 209-211

Accessories included

Decentraliser (1x)



Finishes Text white R9003 Polished (galvanic) chrome
 Text black R9005 Brushed gold





Corps en aluminium peint texturé blanc ou noir, ou dans des finitions galvanisées chrome et or brossé.
Diffuseur en polyméthacrylate transparent.

Body in white or black textured painted aluminium, or in the galvanic chrome and brushed gold finishes.
Diffuser in transparent polymethylmethacrylate.

SINFONIA SYSTEM

SYS
TEM


105





261



477

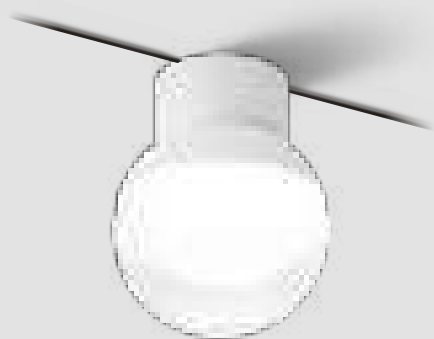**Rossini_S**

topLED CRI 90 | 24 V DC | 6 W DC




Opt	2700K 678 lmS - 600 lmD
DI	CA111DWHMDI
DI	CA111DBBMDI
DI	CA111DCHMDI
DI	CA111DHGMDI

Opt	3000K 741 lmS - 656 lmD
DI	CA111DWHWDI
DI	CA111DBBWDI
DI	CA111DCHWDI
DI	CA111DHGWDI

Rossini_P

topLED CRI 90 | 24 V DC | 6 W DC




Opt	2700K 678 lmS - 600 lmD
DI	CA112DWHMDI
DI	CA112DBBMDI
DI	CA112DCHMDI
DI	CA112DHGMDI

Opt	3000K 741 lmS - 656 lmD
DI	CA112DWHWDI
DI	CA112DBBWDI
DI	CA112DCHWDI
DI	CA112DHGWDI

Verdi

topLED CRI 90 | 24 V DC | 6 W DC



Opt	2700K 678 lmS - 600 lmD
DI	CA113DWHMDI
DI	CA113DBBMDI
DI	CA113DCHMDI
DI	CA113DHGMDI

Opt	3000K 741 lmS - 656 lmD
DI	CA113DWHWDI
DI	CA113DBBWDI
DI	CA113DCHWDI
DI	CA113DHGWDI

Components

page 209-211

Accessories included

Decentraliser (1x)



Finishes Text white R9003 Polished (galvanic) chrome
 Text black R9005 Brushed gold





FYLO+

Dès qu'ils sont installés, les profils disparaissent en se fondant complètement avec l'architecture qui les entoure; le concept de lumière intégrée permet de personnaliser les espaces avec des détails de lumière inédits et précieux.

Once installed, Fylo+ profiles disappear, blending completely into the surrounding architecture; the integrated light concept allows spaces to be customised with new and precious light details.



Profil en aluminium
prétraité.

*Pre-treated
aluminum profile.*

Résine de poudre
de quartz.

*Quartz
powder resin.*

Résine de matériau de
bâtiment mélangé avec
application à plusieurs
couches pour garantir
un effet homogène et
suffisamment épais pour
pouvoir passer le papier
de verre afin de préparer
la peinture finale.

*Mixed building material
resin applied with
several coats granting a
homogeneous and thick
surface, ready to be sanded
and serving as a support for
the final coat of paint.*

Peinture finale.
Application du primaire
comme sur du placoplâtre.

*Final paint.
Application of primer as
if it was on plasterboard.*

Fylo_Direct



65181

Fylo_Recessed



65004



65028



65010



65013

Fylo_Surface



65016



65019



65022



65025






FYLO+




OUT

Profilé en aluminium pré-traité avec un revêtement en résine de poudres de quartz et matériau de construction mélangé.

Pre-treated aluminium profile with cover in quartz powder resin and mixed building material.

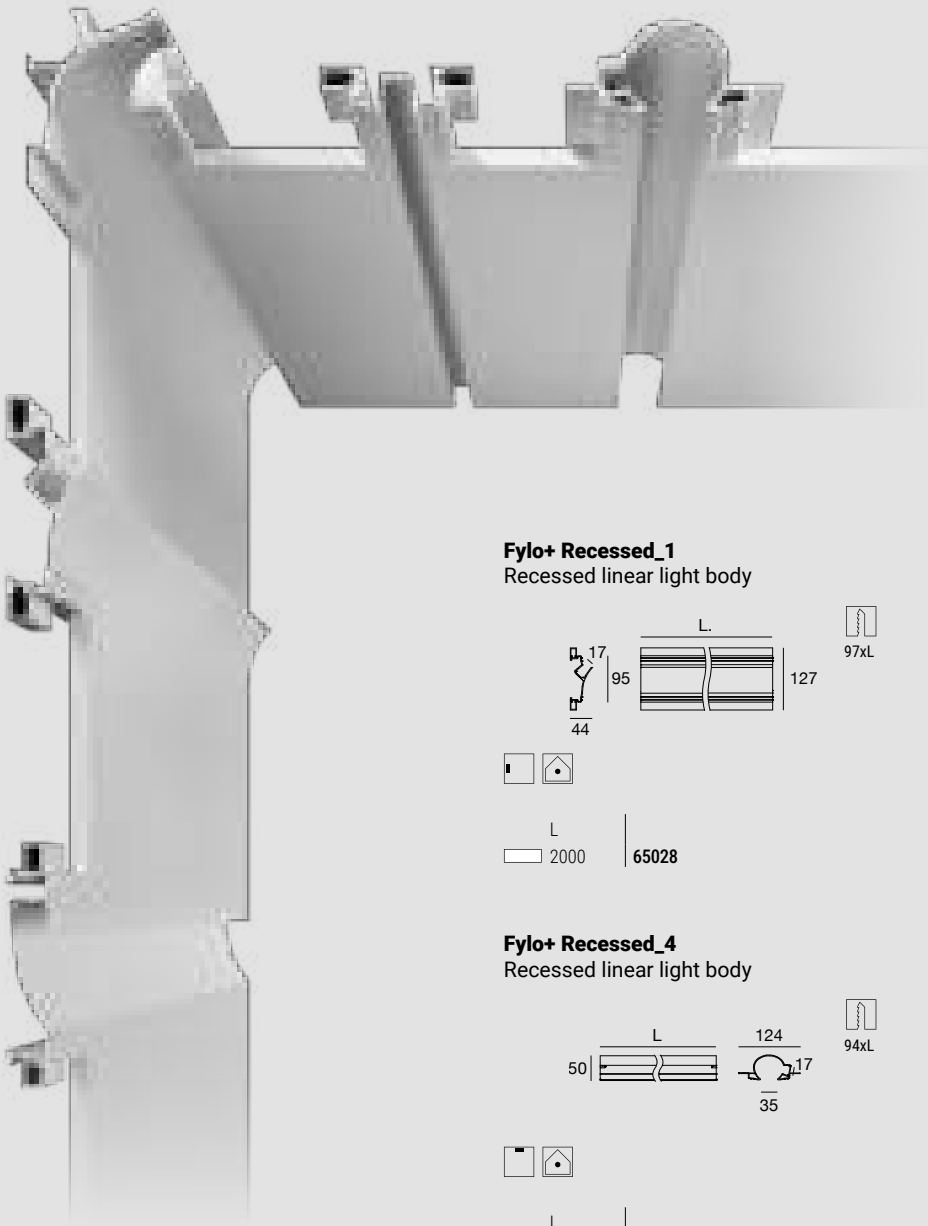

Fylo+ Direct_1
Reel diffuser | Recessed linear light



57xL




L

2000

65181

Fylo+ Recessed_1
Recessed linear light body



97xL




L

2000

65028

Fylo+ Recessed_4
Recessed linear light body



94xL



L

2000

65010

Fylo+ Recessed_3
Recessed linear light body



113xL




L

2000

65004

Fylo+ Recessed_5
Recessed linear light body



65xL



L

2000

65013



Lighting source



Flexlights - Ribbon
page 657

Recessed casing

62900 Recessed casing for dropped ceiling 320x100xh55

Components

Direct_1
65184 Opaline diffuser L roller 5 m
65183 Opaline diffuser L roller 10 m
65182 Opaline diffuser L roller 20 m

Recessed_1 - Recessed_3 - Recessed_4 - Recessed_5
65054 Opaline diffuser 1pcs L 1 m
65055 Opaline diffuser 5pcs L 1 m






Profilé en aluminium pré-traité avec un revêtement en résine de poudres de quartz et matériau de construction mélangé.

Pre-treated aluminium profile with cover in quartz powder resin and mixed building material.




Fylo+ Surface_1
Surface light body




L
2000 | 65016

Fylo+ Surface_2
Surface light body




L
2000 | 65019

Fylo+ Surface_3
Surface light body



L
2000 | 65022

Fylo+ Surface_4
Angular light body



L
2000 | 65025



Lighting souce



Flexlights - Ribbon
page 657

Recessed casing

62900 Recessed casing for dropped ceiling 320x100xh55

Components

65054 Opaline diffuser 1pcs L 1 m
65055 Opaline diffuser 5pcs L 1 m

Surface_1
65008 Sealing caps 2 pcs


Surface_2
65011 Sealing caps 2 pcs

Surface_3
65014 Sealing caps 2 pcs

Surface_4
65097 Sealing caps 2 pcs

INDOOR

TOUR SLIM	227
TOUR	229
POLO	233
BIRBA	235
OUTLOOK	237
SATORI	239
HALFPIPE	241
STRAIGHT	243
TU-O	249
TU-V	251
PERLA	253
SINFONIA	259
POE - POE PLUS	265
YO-YO	269
CREW	271
OH!	275
OH! SMASH	279
ARUBA	281
ANTIGUA	283
ANTILLE	285
MIGUEL	287
MORGANA	289
DOGE	293
HORIZON	297
BASIN	299
STILO	303
DELFI	307
CRISTALBOLLA	311



SUSPENSIONS






Corps en aluminium peint texturé blanc ou noir.
Diffuseur en silicone opalin.

White or black textured painted aluminium body.
Opal silicone diffuser.


TOUR SLIM

Tour_Slim_PD | single-emission topLED CRI 90 | 24 V DC | 33 W DC




Opt	3000K 3612 lmS - 1945 lmD
DI	C01059WHWDI
DI	C01059BBWDI

Tour_Slim_PD | single-emission topLED CRI 90 | 24 V DC | 41 W DC



Opt	3000K 4541 lmS - 2577 lmD
DI	C01060WHWDI
DI	C01060BBWDI


Tour_Slim_PD | single-emission topLED CRI 90 | 24 V DC | 65 W DC



Opt	3000K 7430 lmS - 4123 lmD
DI	C01062WHWDI
DI	C01062BBWDI


Finishes	Text white R9003
	Text black R9005

Tour_Slim_PD | single-emission topLED CRI 90 | 24 V DC | 52 W DC



Opt	3000K 5779 lmS - 3288 lmD
DI	C01061WHWDI
DI	C01061BBWDI

Tour_Slim_PD | single-emission topLED CRI 90 | 24 V DC | 78 W DC



Opt	3000K 9391 lmS - 5128 lmD
DI	C01063WHWDI
DI	C01063BBWDI

Electronics

Tour_Slim_PD 33W

99374	ON/OFF - 1-2 art. - 77
99332	0/1-10V - 1-4 art. - 70
99722	DALI - 1-3 art. - 73
83333	DALI/PUSH - 1-4 art. - 77
C-E400002	DALI/PUSH - 1-7 art. - 77

Tour_Slim_PD 41W

99374	ON/OFF - 1 art. - 77
99332	0/1-10V - 1-3 art. - 70
99722	DALI - 1-2 art. - 73
83333	DALI/PUSH - 1-3 art. - 77
C-E400002	DALI/PUSH - 1-5 art. - 77

Tour_Slim_PD 52W

99374	ON/OFF - 1 art. - 77
99332	0/1-10V - 1-2 art. - 70
99722	DALI - 1-2 art. - 73
83333	DALI/PUSH - 1-2 art. - 77
C-E400002	DALI/PUSH - 1-4 art. - 77

Tour_Slim_PD 65W

99374	ON/OFF - 1 art. - 77
99332	0/1-10V - 1-2 art. - 70
99722	DALI - 1 art. - 73
83333	DALI/PUSH - 1-2 art. - 77
C-E400002	DALI/PUSH - 1-4 art. - 77

Tour_Slim_PD 78W

99331	ON/OFF - 1 art. - 77
99332	0/1-10V - 1 art. - 70
99722	DALI - 1 art. - 73
83333	DALI/PUSH - 1 art. - 77
C-E400002	DALI/PUSH - 1-3 art. - 77

Ceiling rose and fixing clips
page 231






TOUR




Corps en aluminium peint texturé blanc ou noir.
Diffuseur en silicone opalin.

White or black textured painted aluminium body.
Opal silicone diffuser.

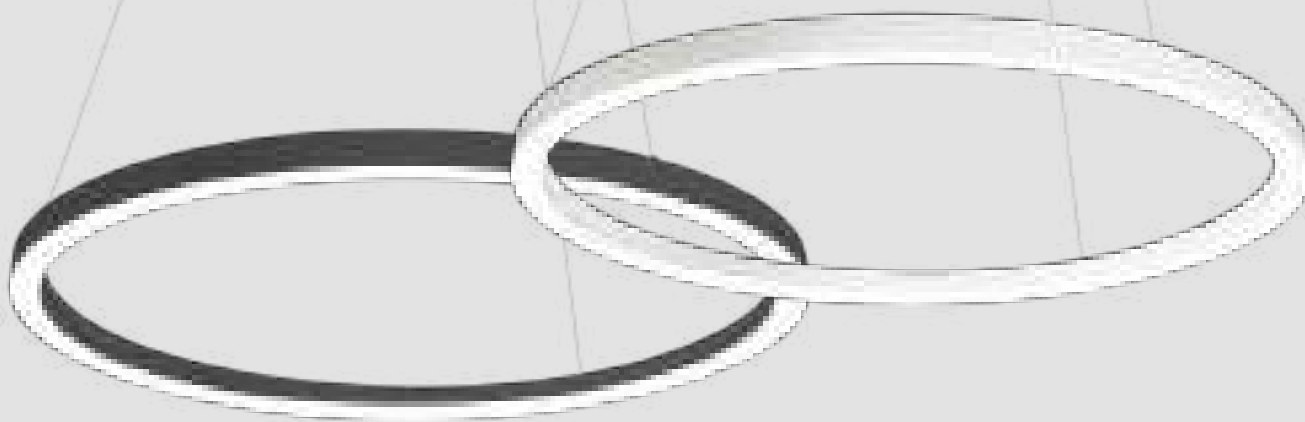**Tour_PD | single-emission**


topLED CRI 90 | 24 V DC | 37,5 W DC



Opt	3000K 4176 lmS - 2340 lmD
DI	C00413WHWDI
DI	C00413BBWDI

Tour_PD | single-emission


topLED CRI 90 | 24 V DC | 70 W DC



Opt	3000K 8352 lmS - 4416 lmD
DI	C00415WHWDI
DI	C00415BBWDI

Tour_PD | single-emission


topLED CRI 90 | 24 V DC | 45 W DC



Opt	3000K 5220 lmS - 2837 lmD
DI	C00414WHWDI
DI	C00414BBWDI

Tour_PD | single-emission

topLED CRI 90 | 24 V DC | 114 W DC



Opt	3000K 14094 lmS - 7545 lmD
DI	C00416WHWDI
DI	C00416BBWDI

Electronics

Tour_PD 37,5W

99374	ON/OFF - 1-2 art. - 56
99332	0/1-10V - 1-4 art. - 70
99722	DALI - 1-3 art. - 73
83333	DALI/PUSH - 1-4 art. - 77
C-E400002	DALI/PUSH - 1-6 art. - 77

Tour_PD 45W

99374	ON/OFF - 1 art. - 56
99332	0/1-10V - 1-3 art. - 70
99722	DALI - 1-2 art. - 73
83333	DALI/PUSH - 1-3 art. - 77
C-E400002	DALI/PUSH - 1-5 art. - 77

Tour_PD 70W

99374	ON/OFF - 1 art. - 56
99332	0/1-10V - 1-2 art. - 70
99722	DALI - 1 art. - 73
83333	DALI/PUSH - 1-2 art. - 77
C-E400002	DALI/PUSH - 1-4 art. - 77

Tour_PD 114W

99331	ON/OFF - 1 art. - 56
99332	0/1-10V - 1 art. - 70
99722	DALI - 1 art. - 73
83333	DALI/PUSH - 1 art. - 77
C-E400002	DALI/PUSH - 1-2 art. - 77

Ceiling rose and fixing clips

page 231


Finishes	Text white R9003
	Text black R9005






CEILING ROSE

3-cables coupling ceiling rose 220-240 V AC




□ 64010	ON-OFF - Phase-Cut Push Dim - Max 50 W
■ 64011	ON-OFF - Phase-Cut Push Dim - Max 50 W
□ 64020	DALI - 0/1-10V Max 70 W
■ 64021	DALI - 0/1-10V Max 70 W

3-cables coupling ceiling rose 220-240 V AC




□ 64578	ON-OFF - Max 90 W
■ 65142	ON-OFF - Max 90 W
□ 64030	Phase-Cut - Max 100 W
■ 64031	Phase-Cut - Max 100 W
□ C-F300013	DALI/PUSH - Max 75W
■ C-F300014	DALI/PUSH - Max 75W

6-cables coupling ceiling rose 220-240 V AC



□ 64066	ON/OFF - Max 150W
■ 64067	ON/OFF - Max 150W
□ 64060	Phase-Cut - Max 100 W
■ 64061	Phase-Cut - Max 100 W
□ C-F300027	DALI/PUSH - Max 150W
■ C-F300029	DALI/PUSH - Max 150W

Fixing kit (3 pcs)



□ 64575	
■ 64670	

Finishes □ Text white R9003
■ Text black R9005






POLO




335

Diffuseur en polyéthylène.
Rosace en métal peint texturé blanc.

Polyethylene diffuser.
Ceiling rose in white textured painted metal.

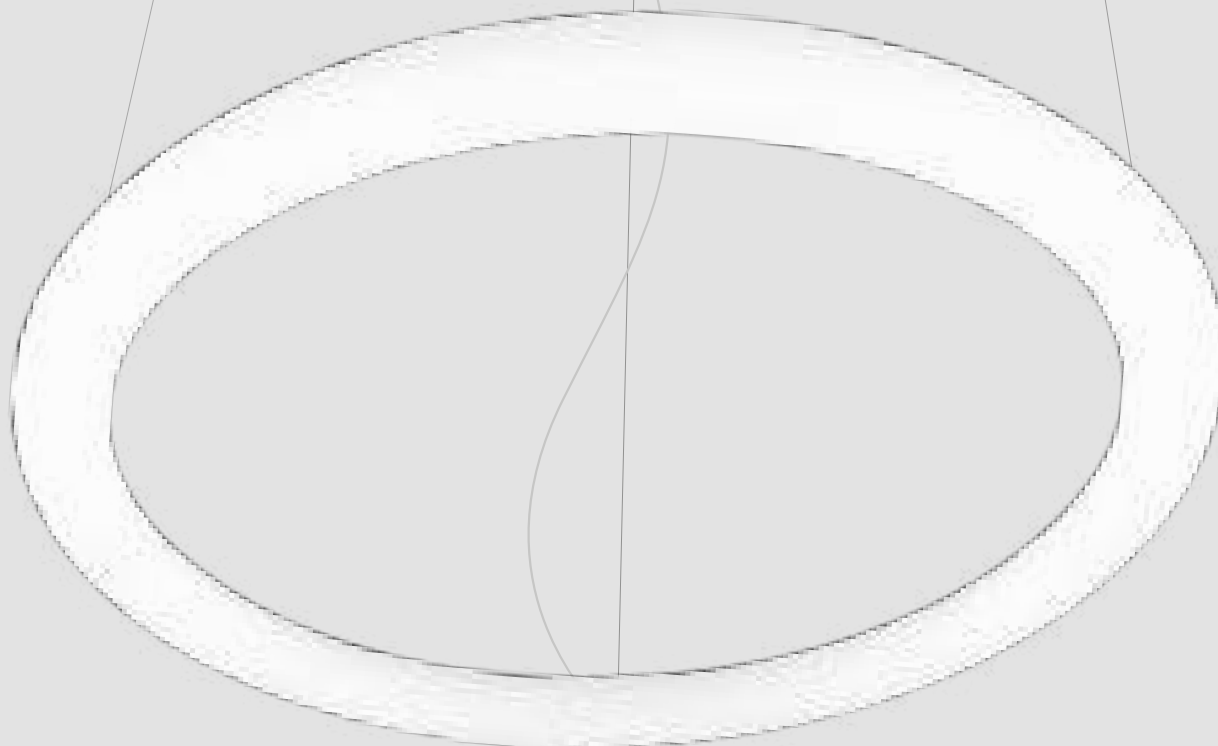**Polo_P**


topLED CRI 80 | 220-240 V
27 W DC - 31 W AC



Opt	3000K	3568 lmS - 3222 lmD
DI	9162	ON/OFF
Opt	3000K	3568 lmS - 3222 lmD
DI	9164	DALI

Polo_P

topLED CRI 80 | 220-240 V
45 W DC - 51 W AC




Opt	3000K	5966 lmS - 5118 lmD
DI	9163	ON/OFF
Opt	3000K	5966 lmS - 5118 lmD
DI	9165	DALI





BIRBA




Corps en laiton poli, aluminium poli ou aluminium peint blanc texturé.
Rosace en métal peint texturé blanc.

*Body in polished brass, polished aluminium or textured white painted
aluminium. Ceiling rose in white textured painted metal.*





Birba_P
220-240 V



GU10 Max 7 W LED Bulb
(not included)

- 9355
- 9357
- 9358



Birba_P
220-240 V



GU10 Max 7 W LED Bulb
(not included)

- 9361
- 9363
- 9364

Birba_P
220-240 V




GU10 Max 7 W LED Bulb
(not included)

- 9367
- 9369
- 9370





OUTLOOK




83 103

Corps en aluminium peint blanc texturé.
Diffuseur en verre transparent.
Rosace en métal peint texturé blanc.

*Body in white textured painted aluminium.
Diffuser in clear glass.
Ceiling rose in white textured painted metal.*



Outlook_P
arrayLED CRI 90 | 220-240 V
8 W DC - 11 W AC



Opt	2700K 1007 lmS - 763 lmD
62°	8420M
Opt	3000K 1082 lmS - 820 lmD
62°	8420

* DIMMER REQUIRED. Find it in "Electronics".

Electronics
KIT0026 Phase-cut dimmer - 100 W
KIT0080 Phase-cut CASAMBI dim - 1 art.




Corps en aluminium peint texturé blanc ou noir.
Diffuseur en polycarbonate opalin. Rosace en métal
peint texturé blanc ou noir.


*Body in white or black textured painted aluminium. Opal
polycarbonate diffuser. Ceiling rose in white or black
textured painted metal.*





SATORI



99 393

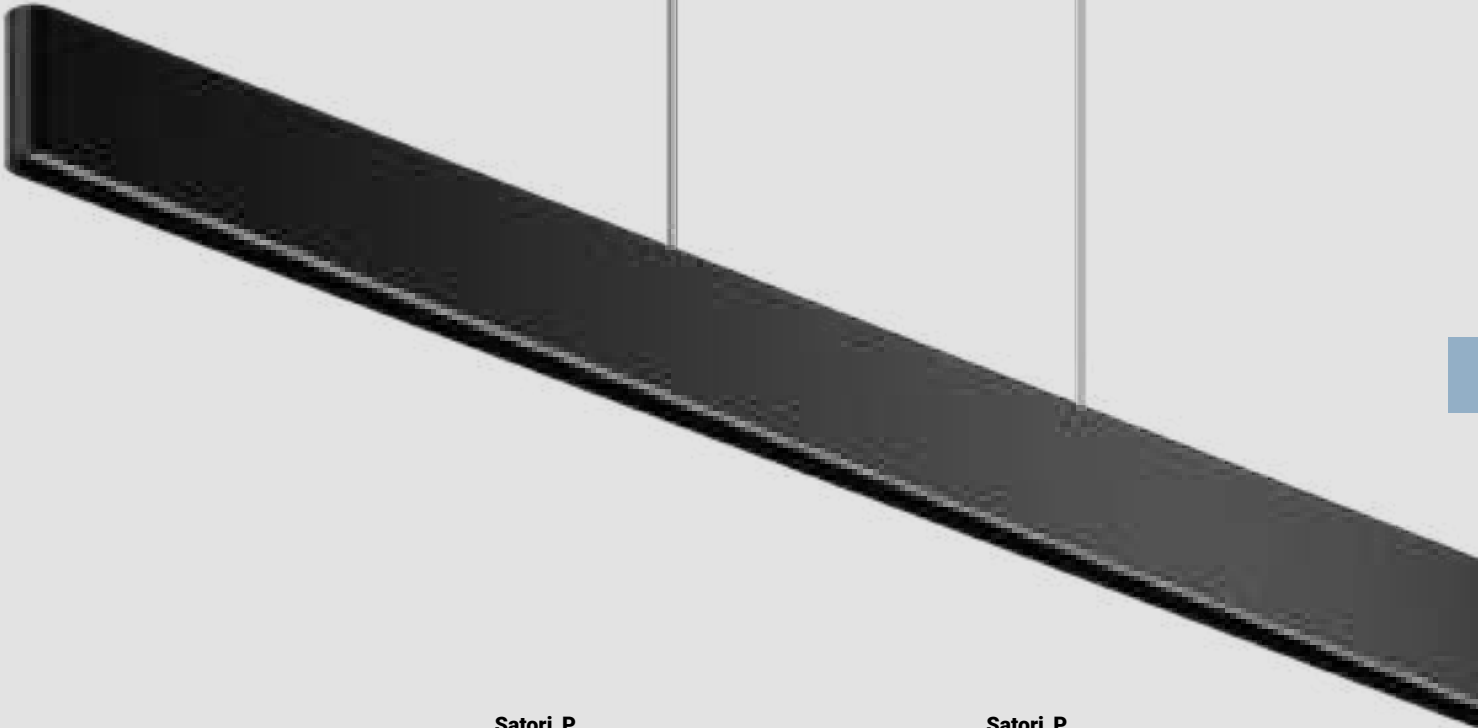


Satori_P
topLED CRI 90 | 220-240 V
25 W DC - 27 W AC



- | | |
|-----|---------------------------|
| Opt | 2700K 4218 lmS - 2360 lmD |
| DI | 9195M |
| DI | 9196M |
| Opt | 3000K 4462 lmS - 2502 lmD |
| DI | 9195 |
| DI | 9196 |

Satori_P
topLED CRI 90 | 220-240 V
36 W DC - 42 W AC



- | | |
|-----|---------------------------|
| Opt | 2700K 5624 lmS - 3706 lmD |
| DI | 9197M |
| DI | 9198M |
| Opt | 3000K 5950 lmS - 3929 lmD |
| DI | 9197 |
| DI | 9198 |

Electronics

KIT0079 DALI CASAMBI dimmer - 1 art.





Corps en aluminium poli ou peint texturé blanc ou noir.
Diffuseur en polycarbonate opalin. Rosace en métal peint
texturé blanc ou noir.



*Body in polished aluminium or white or black textured painted
aluminium. Opal polycarbonate diffuser. Ceiling rose in white or
black textured painted metal.*

HALFPIPE




Halfpipe_P | V2
topLED CRI 90 | 220-240 V
25 W DC - 28 W AC

Halfpipe_P | V2
topLED CRI 90 | 220-240 V
38 W DC - 42 W AC



Opt	3000K	3525 lms - 1912 lmD
DI	9809	
DI	9810	
DI	9811	



Opt	3000K	5042 lms - 2539 lmD
DI	9812	
DI	9813	
DI	9814	

* DIMMER REQUIRED. Find it in "Electronics".

Electronics

KIT0026 Phase-cut dimmer - 100 W
KIT0080 Phase-cut CASAMBI dim - 1 art.





STRAIGHT



399


Corps en aluminium peint texturé blanc ou noir, ou avec finition galvanique chromée. Diffuseur en polycarbonate opalin. Rosace en métal peint texturé blanc ou noir.

Body in white or black textured painted aluminium or in galvanic chrome finish. Opal polycarbonate diffuser. Ceiling rose in white or black textured painted metal.



Hooks for indirect application

Straight_P1
topLED CRI 90 | 220-240 V
10 W DC - 11 W AC



Opt	2700K	1442 lms	552 lmD
White DI*	8200		
Black DI*	8204		
Polished DI	8505		

Straight_P1
topLED CRI 90 | 220-240 V
15 W DC - 18 W AC



Opt	2700K	2222 lms	790 lmD
White DI*	8201		
Black DI*	8205		
Polished DI	8506		



Diffused emission cap



Recessed emission cap

Accessories included
Hook for indirect application
End caps

Finishes Text white R9003 Polished (galvanic) chrome
 Text black R9005






Émission diffuse ou encastrée.

Le diffuseur est extractible et repositionnable dans le corps de la lampe : il est possible d'interchanger librement deux types d'émission, diffuse ou encastrée.

Diffused or recessed emission

The diffuser is even removable and repositionable within the lamp body: you can always interchange two types of emission, diffused or recessed.

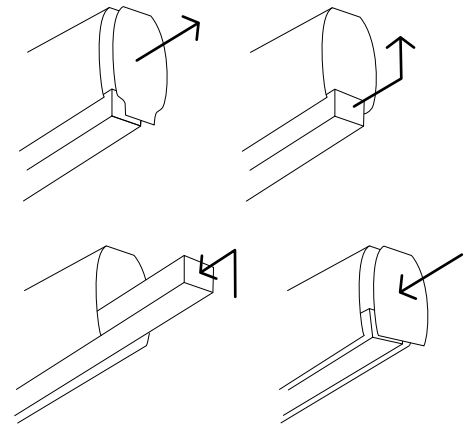





STRAIGHT




399

Corps en aluminium peint texturé blanc ou noir, ou avec finition galvanique chromée. Diffuseur en polycarbonate opalin. Rosace en métal peint texturé blanc ou noir.

Body in white or black textured painted aluminium or in galvanic chrome finish. Opal polycarbonate diffuser. Ceiling rose in white or black textured painted metal.

**Straight_P3**



topLED CRI 90 | 220-240 V
30 W DC - 34 W AC




Opt	2700K	4445 lms	1571 lmD
DI*	8202		
DI*	8206		
DI	8507		

Straight_P3

topLED CRI 90 | 220-240 V
45 W DC - 49 W AC



Opt	2700K	6668 lms	2348 lmD
DI*	8203		
DI*	8207		
DI	8508		

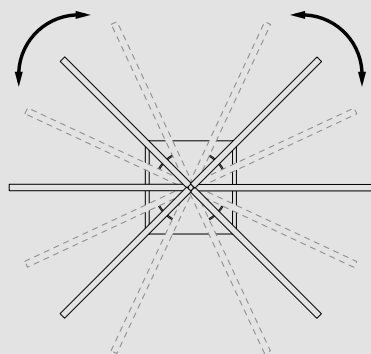**Accessories included**

End caps
Hooks for indirect application

Finishes Text white R9003 Polished (galvanic) chrome
 Text black R9005







TU-O

Diffuseur en polyméthacrylate de méthyle (PMMA) opalin. Bouchons de fermeture en aluminium peint texturé blanc. Rosace en métal peint texturé blanc. Kit de couverture confort en métal peint texturé noir.


Diffuser in opal polymethylmethacrylate. Closing caps in white textured painted aluminium. Ceiling rose in white textured painted metal. Comfort cover kit in black textured painted metal.

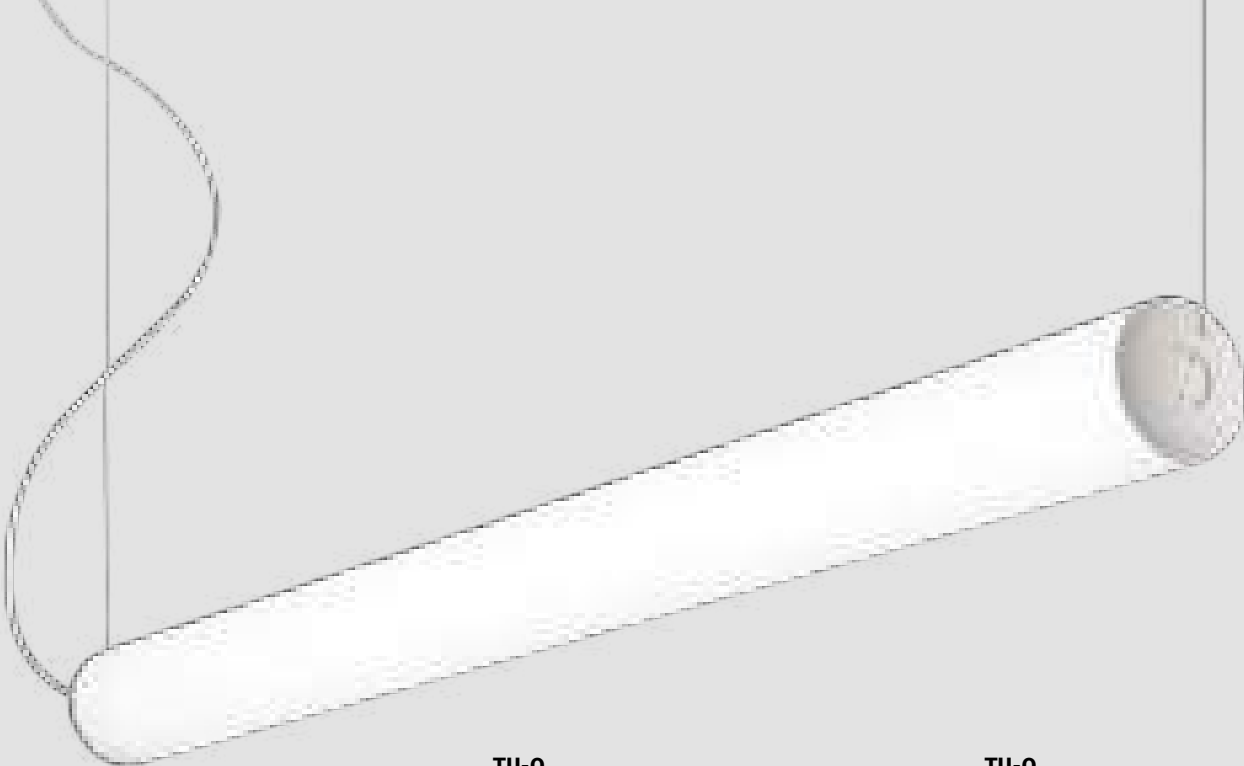

TU-O
topLED CRI 80 | 220-240 V
32 W DC - 36 W AC




Opt	3000K	4828 lmS	4199 lmD	
DI	8845			
Opt	4000K	5166 lmS	4493 lmD	
DI	8845N			

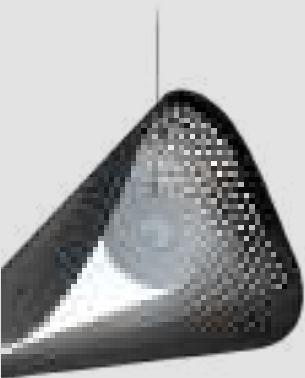

TU-O with black cover

TU-O
topLED CRI 80 | 220-240 V
48 W DC - 53 W AC



Opt	3000K	7242 lmS	5818 lmD	
DI	8846			
Opt	4000K	7750 lmS	6225 lmD	
DI	8846N			

Electronics

KIT0079 DALI CASAMBI dimmer - 1 art.

Accessories

TU-O 36 W AC
KIT0112 Black cover for TU-O 1005mm

TU-O 53 W AC
KIT0113 Black cover for TU-O 1485mm





TU-V




Diffuseur en polyméthacrylate de méthyle (PMMA) opalin.
Bouchons de fermeture en aluminium peint texturé blanc.
Rosace en métal peint texturé blanc.

Diffuser in opal polymethylmethacrylate. Closing caps in white textured painted aluminium. Ceiling rose in white textured painted metal.




TU-V
topLED CRI 80 | 220-240 V
48 W DC - 54 W AC



Opt	3000K 7242 lmS - 5996 lmD
DI	8844
Opt	4000K 7750 lmS - 6415 lmD
DI	8844N

TU-V
topLED CRI 80 | 220-240 V
16 W DC - 20 W AC




Opt	3000K 2414 lmS - 2343 lmD
DI	8842
Opt	4000K 2583 lmS - 2507 lmD
DI	8842N

TU-V
topLED CRI 80 | 220-240 V
48 W DC - 60 W AC




Opt	3000K 7242 lmS - 7029 lmD
DI	8840
Opt	4000K 7750 lmS - 7521 lmD
DI	8840N

TU-V
topLED CRI 80 | 220-240 V
32 W DC - 36 W AC



Opt	3000K 4828 lmS - 4199 lmD
DI	8843
Opt	4000K 5166 lmS - 4493 lmD
DI	8843N

TU-V
topLED CRI 80 | 220-240 V
80 W DC - 96 W AC



Opt	3000K 12070 lmS - 11228 lmD
DI	8841
Opt	4000K 12915 lmS - 12014 lmD
DI	8841N

Electronics

KIT0079 DALI CASAMBI dimmer - 1 art.

Finishes ☐ Opaline PMMA






PERLA

Corps central en aluminium peint texturé blanc ou noir.
Cylindres extérieurs en aluminium peint texturé blanc ou noir, ou avec finitions galvaniques nickel noir brossé et or brossé. Diffuseurs en polyméthacrylate de méthyle (PMMA) sablé.

Central body in white or black textured painted aluminium.
Aluminium external cylinders in white or black textured painted finish, or in brushed black nickel or brushed gold galvanic finishes. Diffusers in sandblasted polymethylmethacrylate.


**Perla_P9**

topLED CRI 90 | 220-240 V
37 W DC - 43 W AC




Opt 3000K 5576 lms - 3864 lmD

DI	9746
DI	9747
DI	9750
DI	9751
DI	9752
DI	9753

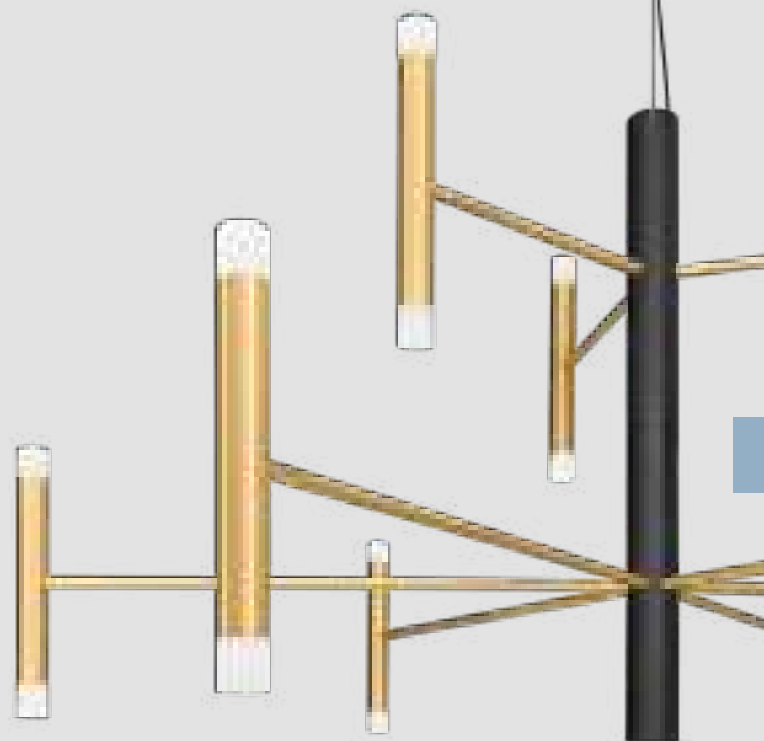**Perla_P12**

topLED CRI 90 | 220-240 V
53 W DC - 59 W AC



Opt 3000K 8110 lms - 5644 lmD


DI	9748
DI	9749
DI	9755
DI	9756
DI	9757
DI	9758

Electronics

KIT0079 DALI CASAMBI dimmer - 1 art.

Finishes	Text white R9003	Brushed nickel/Text white R9003	Brushed Gold/Text white R9003
	Text black R9005	Brushed nickel/Text black R9005	Brushed Gold/Text black R9005



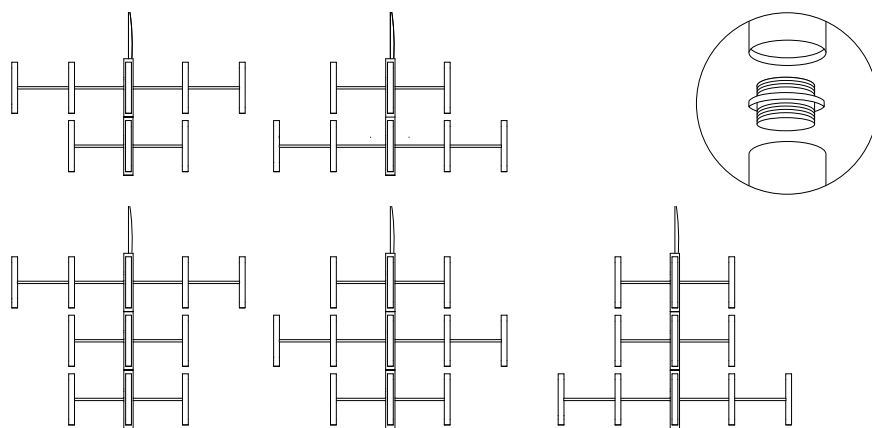

Deux formes et de nombreuses solutions.

Le modèle à 9 bras comprend une section de 6 et une de 3, combinables en deux configurations différentes. Le modèle à 12 bras comprend une section de 6 et deux de 3, combinables en trois configurations différentes.

Two shapes, many solutions

The 9-arm model features one section of 6 and another of 3 arms that can be combined in two different configurations. The 12-arm model features one section of 6 and another two sections of 3 arms that can be combined in three different configurations.









Corps en aluminium peint texturé blanc ou noir, ou avec finitions galvaniques chrome et or brossé. Diffuseur en polyméthacrylate de méthyle (PMMA).
La rosace en métal reprend la même finition que le corps de la lampe.

*Body in white or black textured painted aluminium, or in galvanic chrome and brushed gold finishes. Diffuser in polymethylmethacrylate.
The metal ceiling rose is in the same finish as the light body.*


SINFONIA



206




Puccini | V2
topLED CRI 90 | 220-240 V
4 W DC - 5 W AC



Opt | 2700K 435 lmS - 320 lmD
 [] DI CA140AWHMDI
 [] DI CA140ABBMDI
 [] DI CA140ACHMDI
 [] DI CA140AHGMDI

Opt | 3000K 458 lmS - 337 lmD
 [] DI CA140AWHWDI
 [] DI CA140ABBWDI
 [] DI CA140ACHWDI
 [] DI CA140AHGWDI


Puccini | V2
topLED CRI 90 | 220-240 V
4 W DC - 5 W AC



Opt | 2700K 435 lmS - 320 lmD
 [] DI CA141AWHMDI
 [] DI CA141ABBMDI
 [] DI CA141ACHMDI
 [] DI CA141AHGMDI

Opt | 3000K 458 lmS - 337 lmD
 [] DI CA141AWHWDI
 [] DI CA141ABBWDI
 [] DI CA141ACHWDI
 [] DI CA141AHGWDI


Puccini | V2
topLED CRI 90 | 220-240 V
6 W DC - 8 W AC



Opt | 2700K 529 lmS - 754 lmD
 [] DI CA142AWHMDI
 [] DI CA142ABBMDI
 [] DI CA142ACHMDI
 [] DI CA142AHGMDI

Opt | 3000K 557 lmS - 794 lmD
 [] DI CA142AWHWDI
 [] DI CA142ABBWDI
 [] DI CA142ACHWDI
 [] DI CA142AHGWDI


Puccini | V2
topLED CRI 90 | 220-240 V
6 W DC - 8 W AC



Opt | 2700K 529 lmS - 754 lmD
 [] DI CA143AWHMDI
 [] DI CA143ABBMDI
 [] DI CA143ACHMDI
 [] DI CA143AHGMDI

Opt | 3000K 557 lmS - 794 lmD
 [] DI CA143AWHWDI
 [] DI CA143ABBWDI
 [] DI CA143ACHWDI
 [] DI CA143AHGWDI

Puccini | V2
topLED CRI 90 | 220-240 V
10 W DC - 12 W AC



Opt | 2700K 997 lmS - 705 lmD
 [] DI CA144AWHMDI
 [] DI CA144ABBMDI
 [] DI CA144ACHMDI
 [] DI CA144AHGMDI

Opt | 3000K 1049 lmS - 742 lmD
 [] DI CA144AWHWDI
 [] DI CA144ABBWDI
 [] DI CA144ACHWDI
 [] DI CA144AHGWDI

Finishes [] Text white R9003 [] Polished (galvanic) chrome
 [] Text black R9005 [] Brushed gold





SINFONIA



105

206


477

Corps en aluminium peint texturé blanc ou noir, ou avec finitions galvaniques chrome et or brossé. Diffuseur en polyméthacrylate de méthyle (PMMA). La rosace en métal reprend la même finition que le corps de la lampe.

Body in white or black textured painted aluminium, or in galvanic chrome and brushed gold finishes. Diffuser in polymethylmethacrylate. The metal ceiling rose is in the same finish as the light body.




Rossini_P | V2
topLED CRI 90 | 220-240 V
5 W DC - 7 W AC



Opt	2700K 640 lmS - 608 lmD
DI	CA145AWHMDI
DI	CA145ABBMDI
DI	CA145ACHMDI
DI	CA145AHGMDI
Opt	3000K 679 lmS - 645 lmD
DI	CA145AWHWDI
DI	CA145ABBWDI
DI	CA145ACHWDI
DI	CA145AHGWDI

Verdi | V2
topLED CRI 90 | 220-240 V
5 W DC - 7 W AC



Opt	2700K 640 lmS - 373 lmD
DI	CA147AWHMDI
DI	CA147ABBMDI
DI	CA147ACHMDI
DI	CA147AHGMDI
Opt	3000K 679 lmS - 393 lmD
DI	CA147AWHWDI
DI	CA147ABBWDI
DI	CA147ACHWDI
DI	CA147AHGWDI









Corps en métal peint texturé blanc, noir ou gris, ou avec finition terracotta. Diffuseur en polycarbonate opalin. La rosace en métal reprend la même finition que le corps de la lampe.

*Body in white, black or grey textured painted metal, or in terracotta finish. Opal polycarbonate diffuser.
The metal ceiling rose is in the same finish as the light body.*

POE - POE PLUS




413 455



Poe_P1


topLED CRI 90 | 220-240 V
6 W DC - 7 W AC



Opt	3000K	739 lmS - 600 lmD
DI	8350	
DI	8351	
DI	8353	
DI	8354	

Poe_P3


topLED CRI 90 | 220-240 V
17 W DC - 19 W AC



Opt	3000K	2113 lmS - 1800 lmD
DI	8355	
DI	8356	
DI	8358	
DI	8359	

Poe Plus

topLED CRI 90 | 220-240 V
12 W DC - 15 W AC



Opt	3000K	1623 lmS - 1484 lmD
DI	8360	
DI	8361	
DI	8363	
DI	8364	

Finishes Text white R9003 Text basalt grey R7012
 Text black R9005 Text terracotta










YO-YO




411

Corps en aluminium peint texturé blanc, noir, gris ou rouge rubis.
Diffuseur en polyméthacrylate de méthyle (PMMA) opalin. La rosace en métal reprend la même finition que le corps de la lampe.

Body in white, black, grey or rubin red textured painted aluminium.
Diffuser in opal polymethylmethacrylate. The metal ceiling rose is in the same finish as the light body.

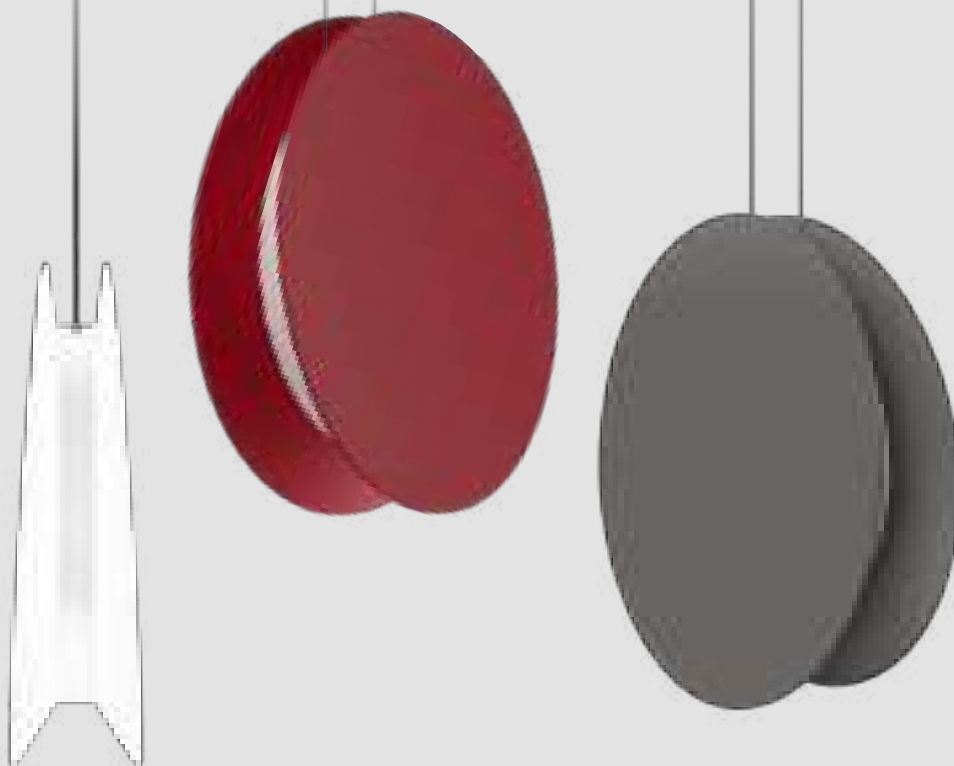**Yo-yo_P**

topLED CRI 90 | 220-240 V
13 W DC - 16 W AC



2,3m

Opt	2700K	1844 lmS - 1079 lmD
DI	9637M	
DI	9638M	
DI	9639M	
DI	9640M	

Opt	3000K	1983 lmS - 1173 lmD
DI	9637	
DI	9638	
DI	9639	
DI	9640	

* **DIMMER REQUIRED.** Find it in "Electronics".

Electronics


KIT0026	Phase-cut dimmer - 100 W
KIT0080	Phase-cut CASAMBI dim - 1 art.

Biémission asymétrique

Le diffuseur du modèle Yo-Yo est protégé par deux disques concaves à la configuration oblique. Le résultat est une émission variable, plus ouverte sur le plan inférieur et plus concentrée dans la partie supérieure.

Asymmetrical biemission

Yo-Yo's diffuser is shielded by two concave discs with an oblique shape. The result is a variable emission, broader at the base and narrower at the top.

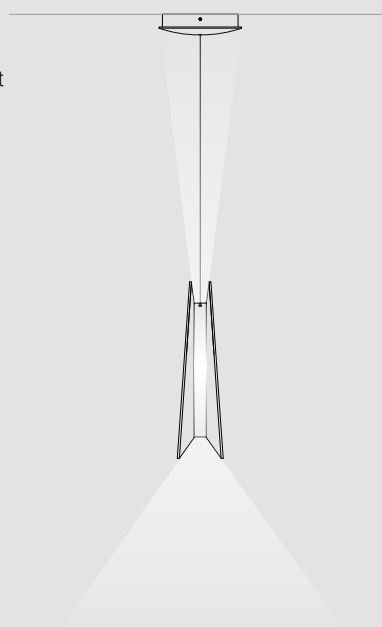

Finishes	Text white R9003	Text basalt grey R7012
	Text black R9005	Text rubin R3003





CREW



339


Corps en métal peint blanc mat ou avec finitions effet brossé dark grey et bruni. Diffuseur en polyméthacrylate de méthyle (PMMA) opalin. Kit de suspension avec rosace en métal peint blanc ou noir.

Metal body painted in matt white or in dark grey and burnished finishes with brushed effect. Diffuser in opal polymethylmethacrylate. Suspension kit with ceiling rose in white or black painted metal.



Crew_1 / Crew_2


Suspension kit



 KIT0120
 KIT0121

Crew_1

topLED CRI 80 | 220-240 V
11 W DC - 12 W AC




Opt	3000K	1253 lms	- 900 lmD
 DI	8270		
 DI	8271		
 DI	8272		

Suspension kit REQUIRED

Crew_1

topLED CRI 80 | 220-240 V
14 W DC - 17 W AC




Opt	3000K	1628 lms	- 1200 lmD
 DI	8275		
 DI	8276		
 DI	8277		

Suspension kit REQUIRED

Crew_1

topLED CRI 80 | 220-240 V
21 W DC - 22 W AC



Opt	3000K	2460 lms	- 1800 lmD
 DI	8280		
 DI	8281		
 DI	8282		


Suspension kit REQUIRED


Finishes  Painted white  Burnished
 Brushed dark grey

**Crew_2**

topLED CRI 80 | 220-240 V
11 W DC - 12 W AC

74 | 

Ø 262 | 



Opt		3000K	1253 lmS	824 lmD
	DI	8285		
	DI	8286		
	DI	8287		
	DI	8288		
	DI	8289		

Suspension kit REQUIRED



CREW



339


Corps en métal peint avec finitions mates blanc/blanc, blanc/cuivre, sable/vert tiffany, noir/blanc, noir/or. Diffuseur en polyméthacrylate de méthyle (PMMA) opalin. Kit de suspension avec rosace en métal peint blanc ou noir.

Metal body painted in the matt finishes white/white, white/copper, sablé/tiffany green, black/white, black/gold. Diffuser in opal polymethylmethacrylate. Suspension kit with ceiling rose in white or black painted metal.



Crew_1 / Crew_2

Suspension kit




2m

 KIT0120
 KIT0121

Crew_2

topLED CRI 80 | 220-240 V
14 W DC - 17 W AC





Opt	3000K	1628 lmS - 1097 lmD
 DI	8292	
 DI	8293	
 DI	8294	
 DI	8295	
 DI	8296	

Suspension kit REQUIRED

Crew_2

topLED CRI 80 | 220-240 V
21 W DC - 22 W AC




Opt	3000K	2460 lmS - 1648 lmD
 DI	8299	
 DI	8300	
 DI	8301	
 DI	8302	
 DI	8303	

Suspension kit REQUIRED

Crew_2 Maxi

topLED CRI 80 | 220-240 V
36 W DC - 38 W AC



Opt	3000K	4339 lmS - 2745 lmD
 DI	CA126AWHWDI	
 DI	CA126AX1WDI	
 DI	CA126AWBWDI	
 DI	CA126AX2WDI	
 DI	CA126AX3WDI	


Suspension kit REQUIRED

Finishes
 Painted white
  Painted white/Painted copper
  Painted black/Painted gold
  Painted black
  Painted white/Painted black
  Painted sablé/Painted tiffany green





OH!




Diffuseur en polyéthylène.
Rosace en métal peint texturé blanc.

Polyethylene diffuser.
Ceiling rose in white textured painted metal.

Oh!_P LED


arrayLED CRI 90 | 220-240 V
5 W DC - 6 W AC



Opt | 3000K 836 lmS - 625 lmD
DI | **10114**

Oh!_P LED


topLED CRI 90 | 220-240 V
7 W DC - 8 W AC



Opt | 3000K 1022 lmS - 845 lmD
DI | **12135**

Oh!_P LED

topLED CRI 90 | 220-240 V
14 W DC - 15 W AC




Opt | 3000K 1930 lmS - 1584 lmD
DI | **12136**



Opt | 3000K 1930 lmS - 1584 lmD
DI | **CA127CPLWDI**

Oh!_P LED

topLED CRI 90 | 220-240 V
18 W DC - 20 W AC | ON-OFF
27 W DC - 28 W AC | DALI-PUSH




Opt | 3000K 2748 lmS - 2115 lmD
DI | **12137**



Opt | 3000K 4067 lmS - 3133 lmD
DI | **CA128CPLWDI**

Oh!_P LED

topLED CRI 90 | 220-240 V
26 W DC - 27 W AC | ON-OFF
39 W DC - 40 W AC | DALI-PUSH



Opt | 3000K 3835 lmS - 2856 lmD
DI | **12138**



Opt | 3000K 5676 lmS - 4227 lmD
DI | **CA129CPLWDI**

Electronics

DALI-PUSH versions
KIT0079 DALI CASAMBI dimmer - 1 art.









Diffuseur en polyéthylène.
Rosace en métal peint texturé blanc.

Polyethylene diffuser.
Ceiling rose in white textured painted metal.

OH!

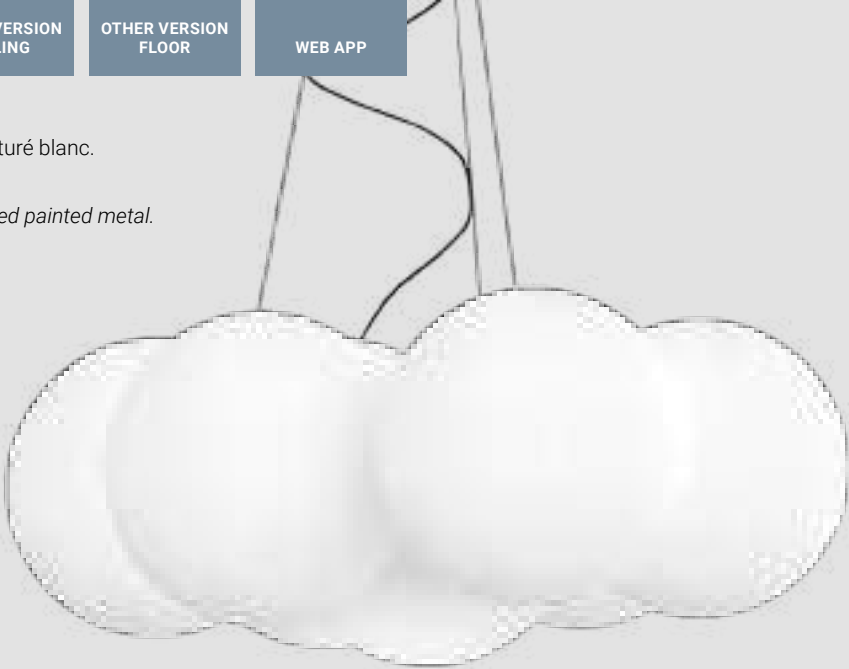



Oh!_P E27
220-240 V



E27 1 x 30 W Max Halo
(not incl./LED bulbs compatible)

12101



Oh!_P E27
220-240 V



E27 1 x 46 W Max Halogen
(not incl./LED bulbs compatible)

12103



Oh!_P E27
220-240 V



E27 1 x 46 W Max Halogen
(not incl./LED bulbs compatible)

12105


Oh!_P E27
220-240 V



E27 1 x 57 W Max Halogen
(not incl./LED bulbs compatible)

12107



Oh!_PM E27
220-240 V



E27 7 x 30 W Max Halogen
(not incl./LED bulbs compatible)

12224

Oh!_PM E27
220-240 V




E27 7 x 46 W Max Halogen
(not incl./LED bulbs compatible)

12225





OH! SMASH




111 461 OUT

Diffuseur en polyéthylène.
Rosace en métal peint texturé blanc.

*Polyethylene diffuser.
Ceiling rose in white textured painted metal.*



Oh! Smash_P E27
220-240 V




2,5m

E27 1 x 30 W Max Halogen
(not incl./LED bulbs compatible)

**12213**

Oh! Smash_P E27
220-240 V



2,5m

E27 1 x 46 W Max Halogen
(not incl./LED bulbs compatible)

**12216**






ARUBA




349

Diffuseur en verre transparent avec bord sablé asymétrique.
Élément central en métal avec finitions galvaniques cuivre, or, chrome ou peint texturé blanc. Rosace en métal peint texturé blanc.

*Diffuser in clear glass with asymmetrical sandblasted edge.
Central element in metal in copper, gold, chrome galvanic finishes or white textured painted. Ceiling rose in white textured painted metal.*

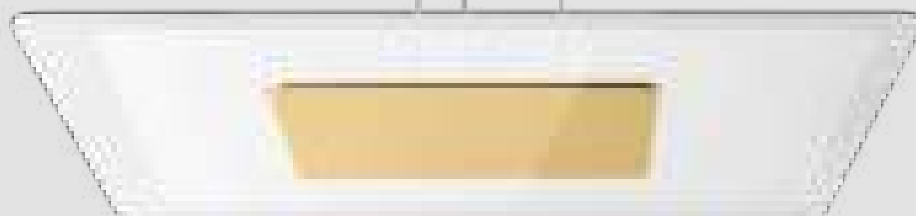**Aruba_P**


topLED CRI 90 | 220-240 V
17 W DC - 19 W AC



Opt	3000K	2212 lmS - 1794 lmD
DI	8928	
DI	8929	
DI	8930	
DI	8931	

Aruba_P

topLED CRI 90 | 220-240 V
35 W DC - 38 W AC



Opt	3000K	4228 lmS - 3388 lmD
DI	8932	
DI	8933	
DI	8934	
DI	8935	


Finishes

Text white R9003	Polished (galvanic) copper
Polished (galvanic) chrome	Polished (galvanic) gold




Diffuseur en verre transparent avec bord sablé.
Élément central et rosace en métal peint texturé blanc.

*Diffuser in clear glass with sandblasted edge.
Central element and ceiling rose in white textured painted metal.*



Antigua_P
topLED CRI 90 | 220-240 V
35 W DC - 38 W AC





2,3m


Opt

3000K 3996 lmS - 2945 lmD

DI

90348

Antigua_P
topLED CRI 90 | 220-240 V
43 W DC - 46 W AC





2,3m

Opt

3000K 4596 lmS - 3760 lmD

DI

90349



Diffuseur en verre transparent avec bord sablé asymétrique.
Élément central en métal avec finitions galvaniques cuivre, or,
chrome ou peint texturé blanc. Rosace en métal peint texturé blanc.

*Diffuser in clear glass with asymmetrical sandblasted edge.
Central element in metal in copper, gold, chrome galvanic finishes or
white textured painted. Ceiling rose in white textured painted metal.*





ANTILLE



401



Antille_P
topLED CRI 90 | 220-240 V
44 W DC - 45 W AC



Opt	3000K	5174 lmS	4278 lmD
DI	8936		
DI	8937		
DI	8938		
DI	8939		



Finishes

Text white R9003	Polished (galvanic) copper
Polished (galvanic) chrome	Polished (galvanic) gold





MIGUEL




Corps en métal peint bicolore : intérieur blanc, extérieur disponible en six variantes de couleur. Rosace en métal peint texturé blanc avec câble d'alimentation blanc, sauf la version noire qui présente rosace et câble noirs.

Two-tone painted metal body: white interior, exterior in six different colours. Ceiling rose in white textured painted metal with white power cable, except for the black version which has a black ceiling rose and cable.

**Miguel**

topLED CRI 80 | 220-240 V
10 W DC - 12 W AC



Opt	2700K	1337 lmS - 953 lmD
DI	9124M	
DI	9125M	
DI	9126M	
DI	9127M	
DI	9128M	
DI	9129M	

Opt	3000K	1449 lmS - 973 lmD
DI	9124	
DI	9125	
DI	9126	
DI	9127	
DI	9128	
DI	9129	

Toutes sauf la version noire
All except black version

Version noire uniquement
Only black version

Finishes

Text white R9003	Text light Grey R7035	Text opal green R6026
Text black R9005	Text azure blue R5009	Text orange R2002



Finishes  Text white R9003/Brushed gold
 Text white R9003/Brushed nickel




Corps en métal peint texturé dans les variantes de couleur blanc, noir, pêche, pétrole et bleu profond, assorti à un détail brossé or ou nickel. La rosace en métal peint reprend la couleur du corps de la lampe. Câble d'alimentation en tissu noir, sauf pour la variante blanche qui possède un câble textile assorti.

Textured painted metal body in white, black, peach, petrol and deep blue combined with brushed gold or nickel detail. The painted metal ceiling rose matches the colour of the lamp body. Black textile power cable, except for the white variant which has a matching textile cable.

MORGANA



Morgana 220-240 V



E27 Max 22 W LED Bulb
(not included)

CA025AKWEZZ
CA025AKBEZZ
CA025AGKEZZ
CA025AEKEZZ
CA025ADNEZZ
CA025AWUEZZ
CA025AUBEZZ
CA025AGUEZZ
CA025AEUEZZ
CA025ADUEZZ



Black or white
textile power
cable

Finishes

Text black R9005/Brushed gold	Dark brown/Brushed gold	Text peach R3012/Brushed gold	Text petrol R6004/Brushed gold
Text black R9005/Brushed nickel	Dark brown/Brushed nickel	Text peach R3012/Brushed nickel	Text petrol R6004/Brushed nickel










DOGE



353


Corps en métal peint texturé dans les variantes de couleur blanc, noir, pêche, pétrole et bleu profond. La rosace en métal peint reprend la couleur du corps de la lampe. Câble d'alimentation en tissu noir, sauf pour la variante blanche qui possède un câble textile assorti.

Textured painted metal body in white, black, peach, petrol and deep blue. The painted metal ceiling rose matches the colour of the lamp body. Black textile power cable, except for the white variant which has a matching textile cable.

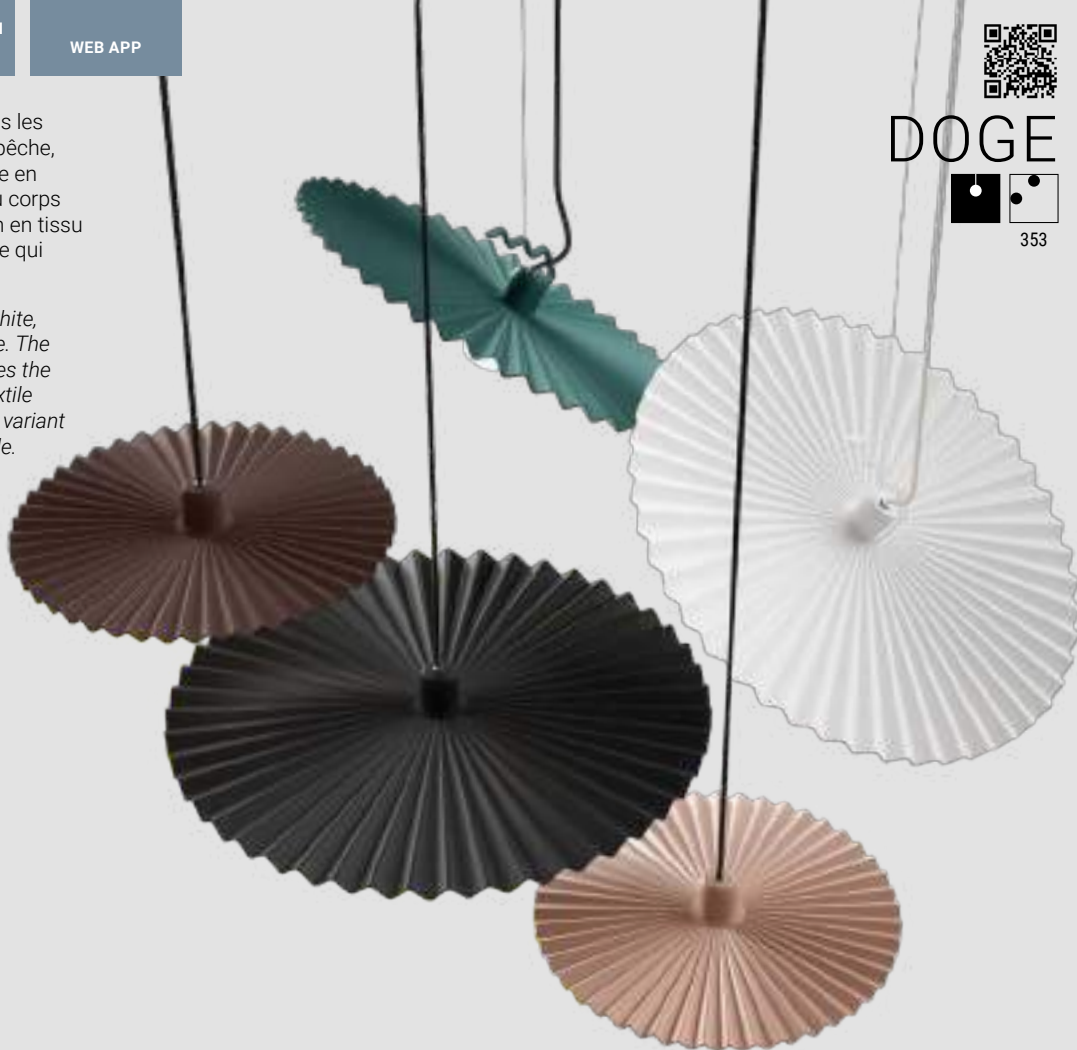

DOGE

220-240 V




E27 Max 22 W LED Bulb
(not included)

White	CA022AWHEZZ
Black	CA022ABBEZZ
Dark brown	CA022AGBEZZ
Dark brown	CA022ADBEZZ
Dark brown	CA022ABEEZZ

DOGE

220-240 V



E27 Max 22 W LED Bulb
(not included)

White	CA021AWHEZZ
Black	CA021ABBEZZ
Dark brown	CA021AGBEZZ
Dark brown	CA021ADBEZZ
Dark brown	CA021ABEEZZ




Black or white
textile power
cable

Accessories included
Lamp orientation accessory

Finishes

Text white R9003	Text petrol R6004	Text peach R3012
Text black R9005	Dark brown	



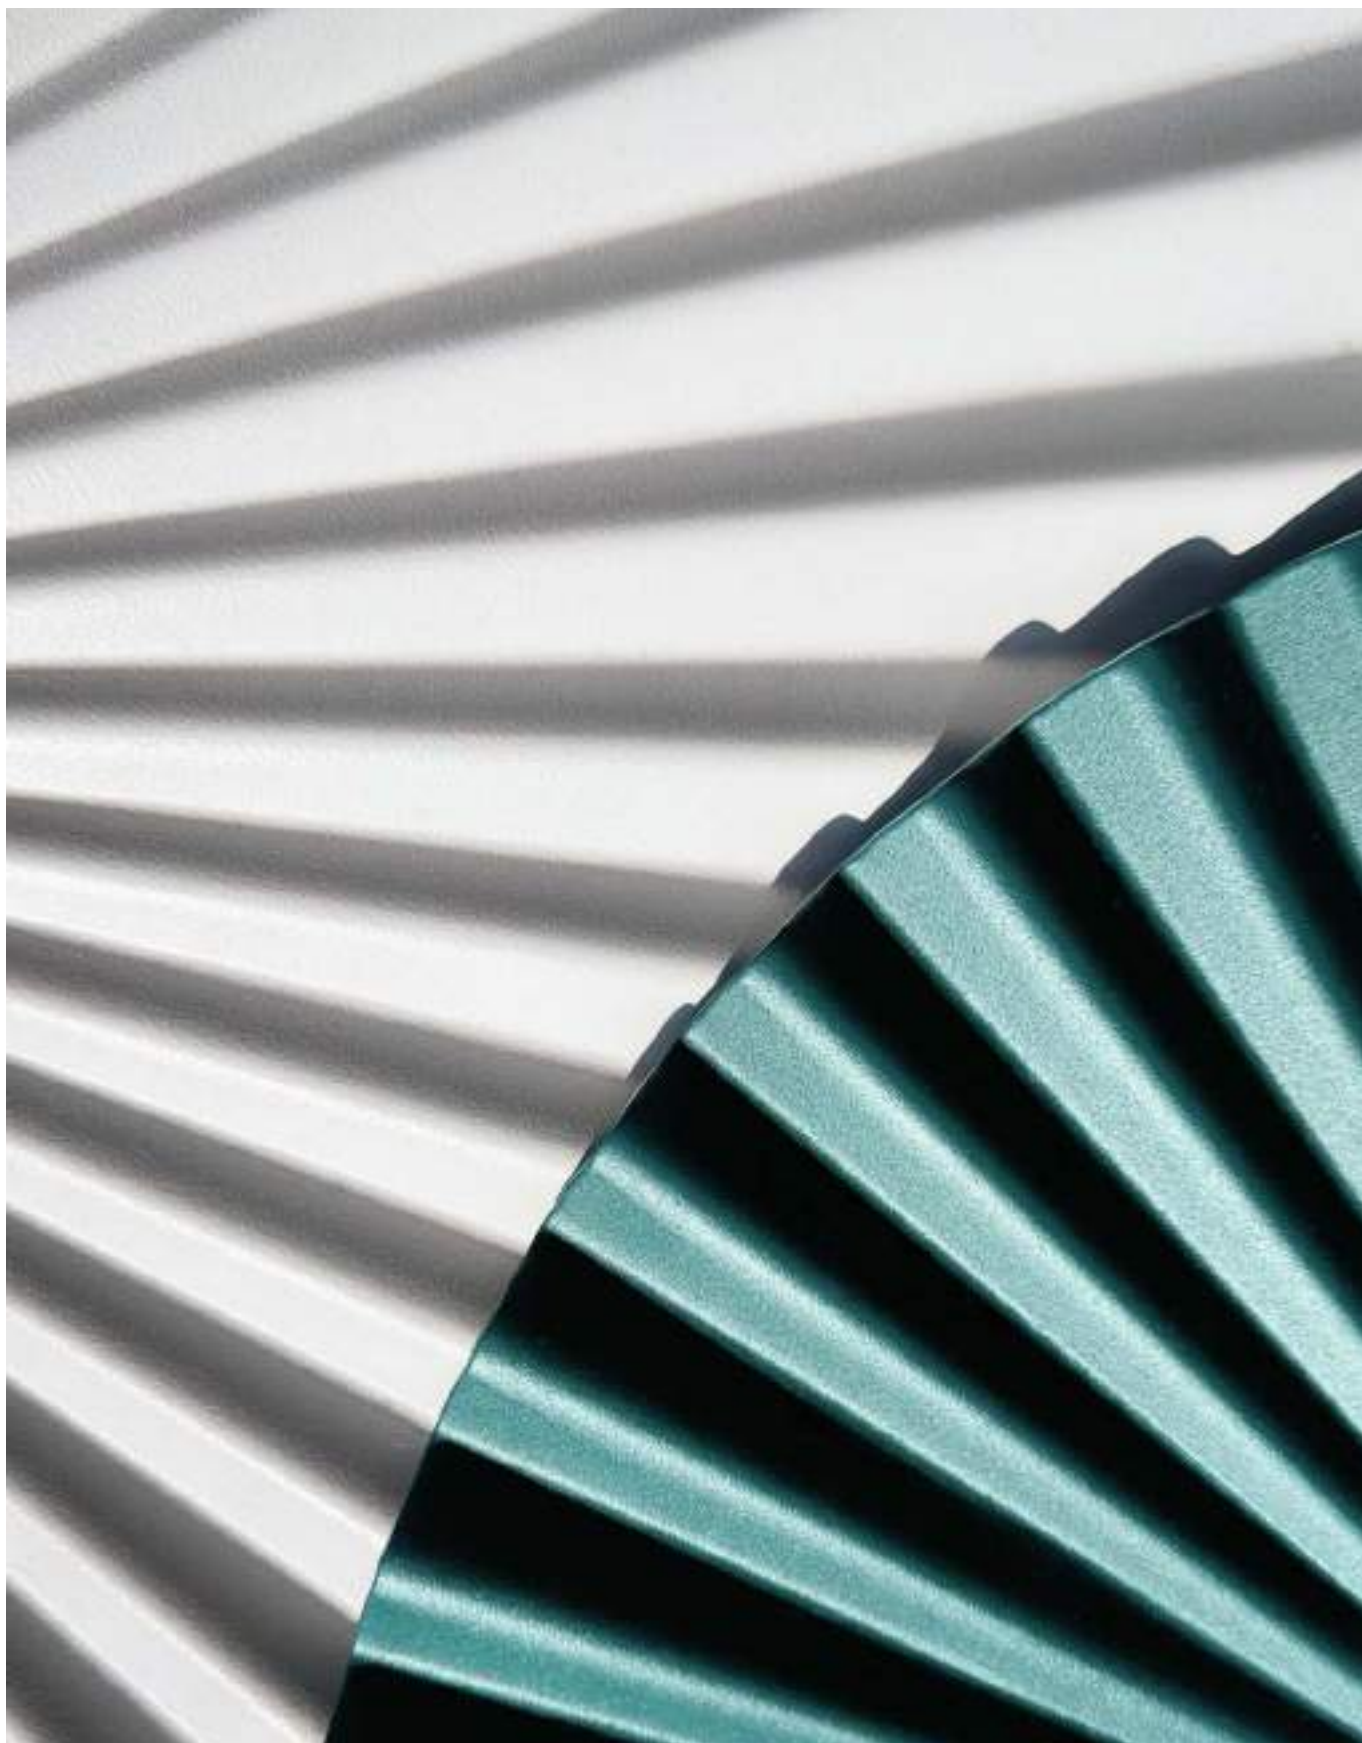





HORIZON




117

Disque réflecteur en verre sérigraphié/sablé blanc. Coupole inférieure en métal avec finitions galvaniques or ou chrome, ou peint texturé blanc. Rosace en métal peint blanc froissé.

Reflective disc in silk-screened/sandblasted white glass. Lower metal dome in gold or chrome galvanic finishes or white textured painted. Ceiling rose in matt white painted metal.

**Horizon_P**

topLED CRI 90 | 220-240 V
29 W DC - 34 W AC



Opt	3000K	3652 lmS - 2270 lmD
DI	90286	
DI	90287	
DI	90288	

Finishes Text white R9003 Polished (galvanic) chrome
 Polished (galvanic) gold





BASIN




357

Corps en aluminium peint texturé dans les couleurs blanc, noir, pêche, pétrole et bleu profond à l'extérieur. Intérieur peint en blanc. Élément central assorti à la peinture extérieure. La rosace en métal peint reprend la couleur du corps de la lampe.

Painted textured aluminium body in white, black, peach, petrol and deep blue on the outside. White painted interior. Central element in the same colour as the exterior paintwork. The painted metal ceiling rose matches the colour of the lamp body.

Basin_P

topLED CRI 90 | 220-240 V
25 W DC - 27 W AC



Opt	2700K 3248 lmS - 2104 lmD
DI	CA070DWHMDI
DI	CA070DBBMDI
DI	CA070DBEMDI
DI	CA070DGBMDI
DI	CA070DLUMDI

Opt	3000K 3410 lmS - 2215 lmD
DI	CA070DWHWDI
DI	CA070DBBWDI
DI	CA070DBEWDI
DI	CA070DGBWDI
DI	CA070DLUWDI

* **DIMMER REQUIRED.** Find it in "Electronics".

Electronics

KIT0026	Phase-cut dimmer - 100 W
KIT0080	Phase-cut CASAMBI dim - 1 art.

Finishes Text white R9003 Text peach R3012 Text deep blue R5011
 Text black R9005 Text petrol R6004









STILO




87 119

Monture et corps en aluminium peint texturé dans les couleurs blanc, noir, pêche, pétrole et bleu profond. Diffuseur en polyméthacrylate de méthyle (PMMA) satiné. La rosace en métal peint reprend la couleur du corps de la lampe.

Textured painted aluminium fixture and body in white, black, peach, petrol and deep blue. Satin polymethylmethacrylate diffuser. The painted metal ceiling rose matches the colour of the lamp body.

Stilo_P

topLED CRI 90 | 220-240 V
13 W DC - 15 W AC




Opt	2700K 1563 lms - 1504 lmD
DI	CA086DWHMDI
DI	CA086DBBMDI
DI	CA086DBEMDI
DI	CA086DGBMDI
DI	CA086DLUMDI

Opt	3000K 1645 lms - 1583 lmD
DI	CA086DWHWDI
DI	CA086DBBWDI
DI	CA086DBEWDI
DI	CA086DGBWDI
DI	CA086DLUWDI

Stilo_P

topLED CRI 90 | 220-240 V
21 W DC - 24 W AC




Opt	2700K 2654 lms - 2541 lmD
DI	CA087DWHMDI
DI	CA087DBBMDI
DI	CA087DBEMDI
DI	CA087DGBMDI
DI	CA087DLUMDI

Opt	3000K 2794 lms - 2675 lmD
DI	CA087DWHWDI
DI	CA087DBBWDI
DI	CA087DBEWDI
DI	CA087DGBWDI
DI	CA087DLUWDI

Stilo_P

topLED CRI 90 | 220-240 V
32 W DC - 35 W AC



Opt	2700K 4043 lms - 3914 lmD
DI	CA088DWHMDI
DI	CA088DBBMDI
DI	CA088DBEMDI
DI	CA088DGBMDI
DI	CA088DLUMDI

Opt	3000K 4256 lms - 4120 lmD
DI	CA088DWHWDI
DI	CA088DBBWDI
DI	CA088DBEWDI
DI	CA088DGBWDI
DI	CA088DLUWDI

* DIMMER REQUIRED. Find it in "Electronics".

Electronics


KIT0026 Phase-cut dimmer - 100 W
KIT0080 Phase-cut CASAMBI dim - 1 art.

Finishes Text white R9003 Text peach R3012 Text deep blue R5011
 Text black R9005 Text petrol R6004










Abat-jour en métal peint extérieurement dans les couleurs blanc, noir, pêche, pétrole et bleu profond, avec finition texturée. Intérieur peint en blanc. La rosace en métal peint reprend la couleur de l'abat-jour.

Metal lampshade externally painted in white, black, peach, petrol and deep blue, with textured finish. White painted interior. The painted metal ceiling rose matches the colour of the lampshade.



Delfi_P
topLED CRI 90 | 220-240 V
13 W DC - 15 W AC



- Opt

2700K 1532 lms - 973 lmD

DI CA054DWHMDD

DI CA054DBBMDD

DI CA054DBEMDD

DI CA054DGBMDD

DI CA054DLUMDD
- Opt

3000K 1613 lms - 1024 lmD

DI CA054DWHWDD


DI CA054DBBWDD

DI CA054DBEWDD

DI CA054DGBWDD

DI CA054DLUWDD

Delfi_P
topLED CRI 90 | 220-240 V
20 W DC - 22 W AC



- Opt

2700K 2513 lms - 1666 lmD

DI CA055DWHMDD

DI CA055DBBMDD

DI CA055DBEMDD

DI CA055DGBMDD

DI CA055DLUMDD
- Opt

3000K 2645 lms - 1754 lmD

DI CA055DWHWDD


DI CA055DBBWDD

DI CA055DBEWDD

DI CA055DGBWDD

DI CA055DLUWDD

Delfi_P
topLED CRI 90 | 220-240 V
32 W DC - 35 W AC



- Opt

2700K 3892 lms - 2757 lmD

DI CA056DWHMDD

DI CA056DBBMDD

DI CA056DBEMDD

DI CA056DGBMDD

DI CA056DLUMDD
- Opt

3000K 4097 lms - 2902 lmD

DI CA056DWHWDD

DI CA056DBBWDD

DI CA056DBEWDD

DI CA056DGBWDD

DI CA056DLUWDD

* DIMMER REQUIRED. Find it in "Electronics".

Electronics

- KIT0026

Phase-cut dimmer - 100 W
- KIT0080

Phase-cut CASAMBI dim - 1 art.









Monture et corps en aluminium peint texturé dans les couleurs blanc, noir, pêche, pétrole et bleu profond. Diffuseur en verre transparent. La rosace en métal peint reprend la couleur du corps de la lampe.

Textured painted aluminium fixture and body in the colours white, black, peach, petrol and deep blue. Transparent glass diffuser. The painted metal ceiling rose matches the colour of the lamp body.


CRISTALBOLLA



127

Cristalbolla_P

topLED CRI 90 | 220-240 V
10 W DC - 11 W AC

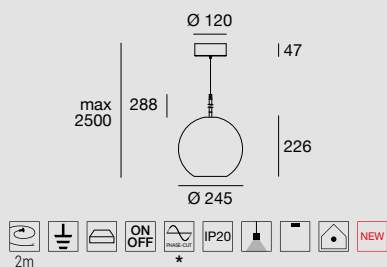


Opt	2700K 1338 lmS - 1127 lmD
DI	CA092DWHMDI
DI	CA092DBBMDI
DI	CA092DBEMDI
DI	CA092DGBMDI
DI	CA092DLUMDI

Opt	3000K 1408 lmS - 1186 lmD
DI	CA092DWHWDI
DI	CA092DBBWDI
DI	CA092DBEWDI
DI	CA092DGBWDI
DI	CA092DLUWDI

Cristalbolla_P

topLED CRI 90 | 220-240 V
17 W DC - 19 W AC

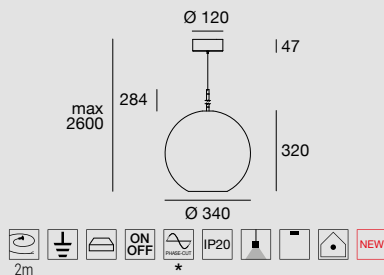


Opt	2700K 2282 lmS - 1871 lmD
DI	CA093DWHMDI
DI	CA093DBBMDI
DI	CA093DBEMDI
DI	CA093DGBMDI
DI	CA093DLUMDI

Opt	3000K 2402 lmS - 1969 lmD
DI	CA093DWHWDI
DI	CA093DBBWDI
DI	CA093DBEWDI
DI	CA093DGBWDI
DI	CA093DLUWDI

Cristalbolla_P

topLED CRI 90 | 220-240 V
23 W DC - 26 W AC

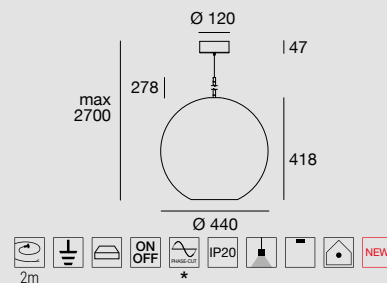

Opt	2700K 3065 lmS - 2314 lmD
DI	CA094DWHMDI
DI	CA094DBBMDI
DI	CA094DBEMDI
DI	CA094DGBMDI
DI	CA094DLUMDI

Opt	3000K 3226 lmS - 2436 lmD
DI	CA094DWHWDI
DI	CA094DBBWDI
DI	CA094DBEWDI
DI	CA094DGBWDI
DI	CA094DLUWDI

* DIMMER REQUIRED. Find it in "Electronics".

Electronics

KIT0026 Phase-cut dimmer - 100 W
KIT0080 Phase-cut CASAMBI dim - 1 art.


Finishes Text white R9003 Text peach R3012 Text deep blue R5011
 Text black R9005 Text petrol R6004





INDOOR

ISIDE	317
BOX	319
TARA	323
POLO	335
CREW	339
KIOO	343
IGLOO	345
TU-TOP	347
ARUBA	349
ANTIGUA	351
DOGE	353
BASIN	357



SURFACE

WALL & CEILING






ISIDE

Painted textured aluminium body in white, black and dark brown on the outside. Inner part and fixture in textured white. Opal polymethylmethacrylate diffuser.

Painted textured aluminium body in white, black and dark brown on the outside. Inner part and fixture in textured white. Opal polymethylmethacrylate diffuser.

Iside

topLED CRI 90 | 220-240 V
10 W DC - 11 W AC




Opt | 2700K 1249 lmS - 542 lmD
 [] DI CA076DWHMDD
 [] DI CA076DBBMDD
 [] DI CA076DDBMDD

Opt | 3000K 1315 lmS - 570 lmD
 [] DI CA076DWHWDD
 [] DI CA076DBBWDD
 [] DI CA076DDBWDD

Iside

topLED CRI 90 | 220-240 V
24 W DC - 26 W AC




Opt | 2700K 2988 lmS - 1572 lmD
 [] DI CA077DWHMDD
 [] DI CA077DBBMDD
 [] DI CA077DDBMDD

Opt | 3000K 3145 lmS - 1655 lmD
 [] DI CA077DWHWDD
 [] DI CA077DBBWDD
 [] DI CA077DDBWDD

Iside

topLED CRI 90 | 220-240 V
34 W DC - 37 W AC




Opt | 2700K 4093 lmS - 2584 lmD
 [] DI CA078DWHMDD
 [] DI CA078DBBMDD
 [] DI CA078DDBMDD

Opt | 3000K 4308 lmS - 2720 lmD
 [] DI CA078DWHWDD
 [] DI CA078DBBWDD
 [] DI CA078DDBWDD

Iside

topLED CRI 90 | 220-240 V
42 W DC - 44 W AC



Opt | 2700K 5346 lmS - 3404 lmD
 [] DI CA079DWHMDD
 [] DI CA079DBBMDD
 [] DI CA079DDBMDD

Opt | 3000K 5079 lmS - 3583 lmD
 [] DI CA079DWHWDD
 [] DI CA079DBBWDD
 [] DI CA079DDBWDD

* DIMMER REQUIRED. Find it in "Electronics".

Electronics

KIT0026 Phase-cut dimmer - 100 W
KIT0080 Phase-cut CASAMBI dim - 1 art.


Finishes [] Text white R9003 [] Dark brown
 [] Text black R9005





Corps en aluminium peint texturé blanc.
Diffuseur en polyméthacrylate de méthyle opalin.

*White painted textured aluminium body.
Opal polymethylmethacrylate diffuser.*

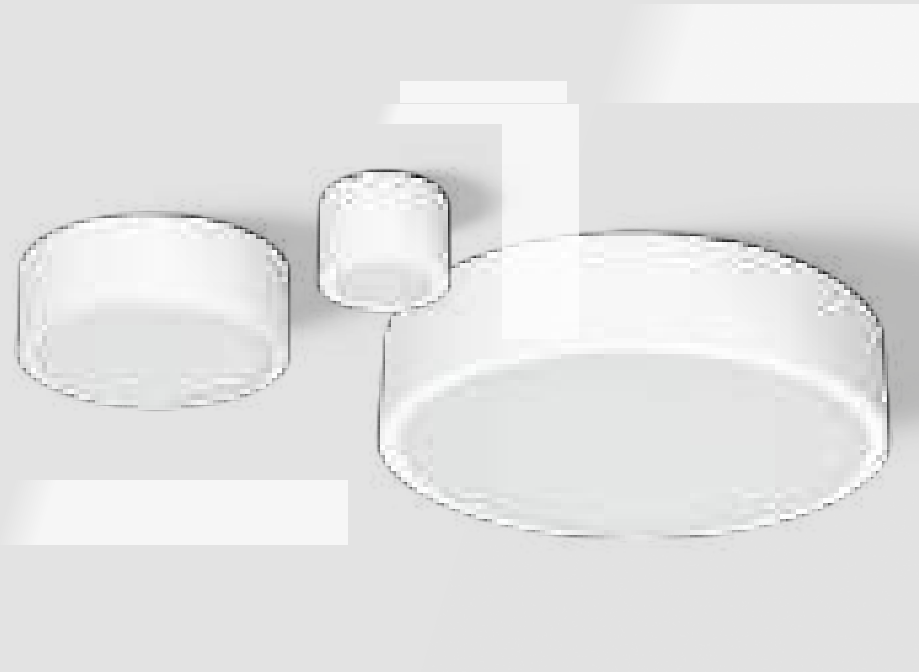


Box_SR
topLED CRI 80 | 220-240 V
6 W DC - 7 W AC




Opt	3000K 790 lmS - 565 lmD
DI	8236
Opt	4000K 830 lmS - 635 lmD
DI	8236N

Box_SR
topLED CRI 80 | 220-240 V
15 W DC - 17 W AC




Opt	3000K 1940 lmS - 1383 lmD
DI	8238
Opt	4000K 2020 lmS - 1556 lmD
DI	8238N

Box_SR
topLED CRI 80 | 220-240 V
23 W DC - 25 W AC



Opt	3000K 2867 lmS - 2030 lmD
DI	8240
Opt	4000K 3156 lmS - 2252 lmD
DI	8240N

Box_SR
topLED CRI 80 | 220-240 V
43 W DC - 48 W AC



Opt	3000K 5314 lmS - 3842 lmD
DI	8242
Opt	4000K 5568 lmS - 4325 lmD
DI	8242N

* DIMMER REQUIRED. Find it in "Electronics".

Electronics

- KIT0026

Phase-cut dimmer - 100 W
- KIT0080

Phase-cut CASAMBI dim - 1 art.






BOX

Corps en aluminium peint texturé blanc.
Diffuseur en polyméthacrylate de méthyle opalin.

*White painted textured aluminium body.
Opal polymethylmethacrylate diffuser.*




Box_SQ
topLED CRI 80 | 220-240 V
6 W DC - 7 W AC




Opt	3000K 792 lmS - 563 lmD
DI	8227
Opt	4000K 856 lmS - 634 lmD
DI	8227N

Box_SQ
topLED CRI 80 | 220-240 V
15 W DC - 17 W AC




Opt	3000K 1895 lmS - 1362 lmD
DI	8229
Opt	4000K 2103 lmS - 1572 lmD
DI	8229N

Box_SQ
topLED CRI 80 | 220-240 V
25 W DC - 30 W AC



Opt	3000K 3418 lmS - 2402 lmD
DI	8231
Opt	4000K 3594 lmS - 2706 lmD
DI	8231N

Box_SQ
topLED CRI 80 | 220-240 V
39 W DC - 43 W AC



Opt	3000K 5090 lmS - 3441 lmD
DI	8233
Opt	4000K 5214 lmS - 3875 lmD
DI	8233N

* DIMMER REQUIRED. Find it in "Electronics".

Electronics
KIT0026 Phase-cut dimmer - 100 W
KIT0080 Phase-cut CASAMBI dim - 1 art.

Finishes ☐ Text white R9003







TARA

Corps en aluminium peint texturé blanc ou noir.
Diffuseur en polyméthacrylate de méthyle opalin.

White or black painted textured aluminium body.
Opal polymethylmethacrylate diffuser.

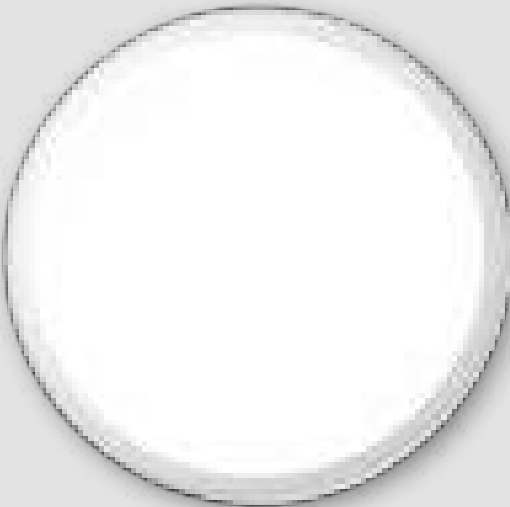

Tara_R
topLED CRI 90 | 220-240 V
17 W DC - 21 W AC



ON
OFF


Opt | 3000K 2208 lmS - 1764 lmD
DI | **8334**
DI | **8335**

ON
OFF

Opt | 2700K 2054 lmS - 1641 lmD
DI | **CA004DWHMDI**
DI | **CA004DBBMDI**

Opt | 3000K 2208 lmS - 1764 lmD
DI | **8590**
DI | **8591**

Tara_R
topLED CRI 90 | 220-240 V
27 W DC - 31 W AC



ON
OFF


Opt | 3000K 3285 lmS - 2466 lmD
DI | **8337**
DI | **8338**

ON
OFF

Opt | 2700K 3056 lmS - 2294 lmD
DI | **CA005DWHMDI**
DI | **CA005DBBMDI**

Opt | 3000K 3285 lmS - 2466 lmD
DI | **8593**
DI | **8594**

Tara_R
topLED CRI 90 | 220-240 V
41 W DC - 45 W AC



ON
OFF

Opt | 3000K 4483 lmS - 3525 lmD
DI | **8340**
DI | **8341**

ON
OFF

Opt | 2700K 4542 lmS - 3280 lmD
DI | **CA006DWHMDI**
DI | **CA006DBBMDI**

Opt | 3000K 4483 lmS - 3525 lmD
DI | **8596**
DI | **8597**

* DIMMER REQUIRED. Find it in "Electronics".

Electronics

KIT0026 Phase-cut dimmer - 100 W
KIT0080 Phase-cut CASAMBI dim - 1 art.

Finishes Text white R9003
 Text black R9005







TARA

Corps en aluminium peint texturé blanc ou noir.
Diffuseur en polyméthacrylate de méthyle opalin.

White or black painted textured aluminium body.
Opal polymethylmethacrylate diffuser.

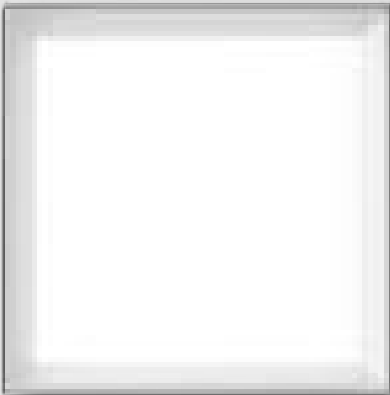

Tara_Q
topLED CRI 90 | 220-240 V
17 W DC - 21 W AC



ON
OFF


Opt | 3000K 2336 lmS - 1360 lmD
DI | **8325**
DI | **8326**

ON
OFF

Opt | 2700K 2173 lmS - 1265 lmD
DI | **CA001DWHMDI**
DI | **CA001DBBMDI**

Opt | 3000K 2336 lmS - 1360 lmD
DI | **8550**
DI | **8551**

Tara_Q
topLED CRI 90 | 220-240 V
27 W DC - 31 W AC



ON
OFF


Opt | 3000K 3228 lmS - 1898 lmD
DI | **8328**
DI | **8329**

ON
OFF

Opt | 2700K 3003 lmS - 1765 lmD
DI | **CA002DWHMDI**
DI | **CA002DBBMDI**

Opt | 3000K 3228 lmS - 1898 lmD
DI | **8553**
DI | **8554**

Tara_Q
topLED CRI 90 | 220-240 V
41 W DC - 45 W AC



ON
OFF

Opt | 3000K 4700 lmS - 2720 lmD
DI | **8331**
DI | **8332**

ON
OFF

Opt | 2700K 4372 lmS - 2530 lmD
DI | **CA003DWHMDI**
DI | **CA003DBBMDI**

Opt | 3000K 4700 lmS - 2720 lmD
DI | **8556**
DI | **8557**

* DIMMER REQUIRED. Find it in "Electronics".

Electronics

KIT0026 Phase-cut dimmer - 100 W
KIT0080 Phase-cut CASAMBI dim - 1 art.


Finishes Text white R9003
 Text black R9005






Corps en aluminium peint texturé blanc ou noir.
Diffuseur en polyméthacrylate de méthyle opalin.

White or black painted textured aluminium body.
Opal polymethylmethacrylate diffuser.

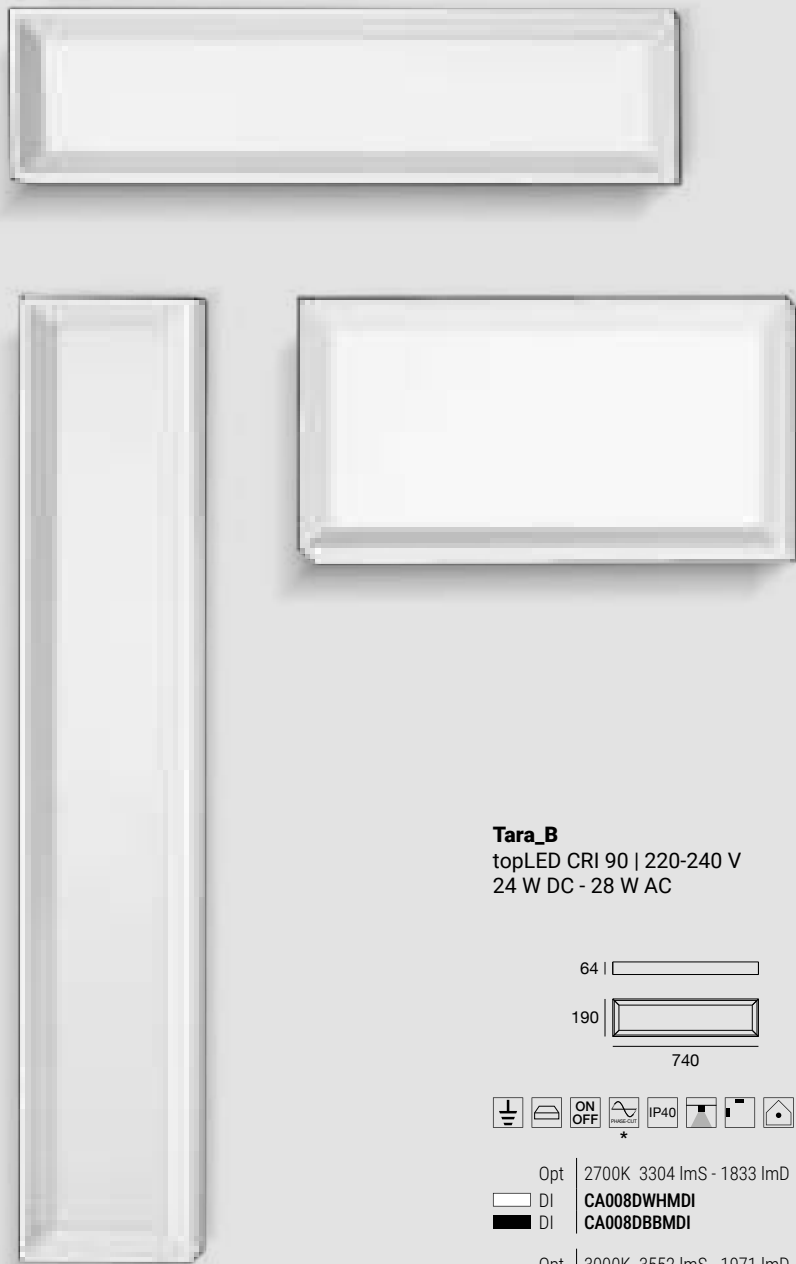


Tara_B
topLED CRI 90 | 220-240 V
24 W DC - 28 W AC




Opt	2700K 3304 lmS - 1833 lmD
DI	CA008DWHMDI
DI	CA008DBBMDI
Opt	3000K 3552 lmS - 1971 lmD
DI	9018
DI	9019

Tara_B
topLED CRI 90 | 220-240 V
38 W DC - 44 W AC



Opt	2700K 4354 lmS - 2756 lmD
DI	CA007DWHMDI
DI	CA007DBBMDI
Opt	3000K 4680 lmS - 2963 lmD
DI	9015
DI	9016

Tara_B
topLED CRI 90 | 220-240 V
38 W DC - 42 W AC



Opt	2700K 5036 lmS - 2555 lmD
DI	CA009DWHMDI
DI	CA009DBBMDI
Opt	3000K 5414 lmS - 2746 lmD
DI	9021
DI	9022

* DIMMER REQUIRED. Find it in "Electronics".

Electronics

KIT0026	Phase-cut dimmer - 100 W
KIT0080	Phase-cut CASAMBI dim - 1 art.

Finishes Text white R9003
 Text black R9005







TARA

Corps en aluminium peint texturé blanc ou noir.
Diffuseur en polyméthacrylate de méthyle opalin.

White or black painted textured aluminium body.
Opal polymethylmethacrylate diffuser.

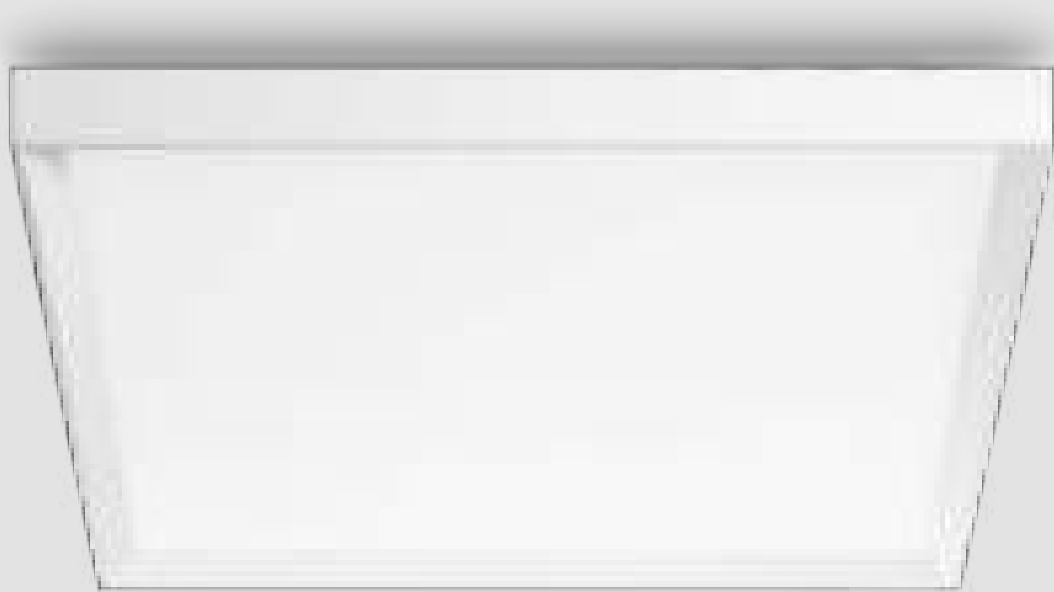


Tara Maxi
topLED CRI 90 | 220-240 V
51 W DC - 58 W AC



- | | |
|-----|---------------------------|
| Opt | 2700K 5850 lmS - 4334 lmD |
| DI | CA010DWHMDI |
| DI | CA010DBBMDI |
| Opt | 3000K 6288 lmS - 4669 lmD |
| DI | 9024 |
| DI | 9025 |

Tara Mega
topLED CRI 90 | 220-240 V
66 W DC - 76 W AC



- | | |
|-----|---------------------------|
| Opt | 2700K 7300 lmS - 5476 lmD |
| DI | CA011DWHMDI |
| DI | CA011DBBMDI |
| Opt | 3000K 7848 lmS - 5887 lmD |
| DI | 9027 |
| DI | 9028 |

* DIMMER REQUIRED. Find it in "Electronics".

Electronics

- | | |
|---------|--------------------------------|
| KIT0026 | Phase-cut dimmer - 100 W |
| KIT0080 | Phase-cut CASAMBI dim - 1 art. |






TARA

Corps en aluminium peint texturé blanc ou noir.
Diffuseur en polyméthacrylate de méthyle opalin.

White or black painted textured aluminium body.
Opal polymethylmethacrylate diffuser.





Tara UPS
topLED CRI 90 | 220-240 V
18 W DC - 19 W AC




- | | |
|-----|---------------------------|
| Opt | 2700K 2173 lmS - 1265 lmD |
| DI | CA027KWHMDI |
| DI | CA027KBBMDI |
| Opt | 3000K 2336 lmS - 1360 lmD |
| DI | CA027KWHWDI |
| DI | CA027KBBWDI |

Tara UPS
topLED CRI 90 | 220-240 V
25 W DC - 26 W AC



- | | |
|-----|---------------------------|
| Opt | 2700K 3003 lmS - 1765 lmD |
| DI | CA028KWHMDI |
| DI | CA028KBBMDI |
| Opt | 3000K 3228 lmS - 1898 lmD |
| DI | CA028KWHWDI |
| DI | CA028KBBWDI |

Tara EM
topLED CRI 90 | 220-240 V
25 W DC - 29 W AC



- | | |
|-----|---------------------------|
| Opt | 2700K 3003 lmS - 1765 lmD |
| DI | CA028SWHMDI |
| DI | CA028SBBMDI |
| Opt | 3000K 3228 lmS - 1898 lmD |
| DI | CA028SWHWDI |
| DI | CA028SBBWDI |

Finishes Text white R9003
 Text black R9005






TARA

Corps en aluminium peint texturé blanc ou noir.
Diffuseur en polyméthacrylate de méthyle opalin.

White or black painted textured aluminium body.
Opal polymethylmethacrylate diffuser.

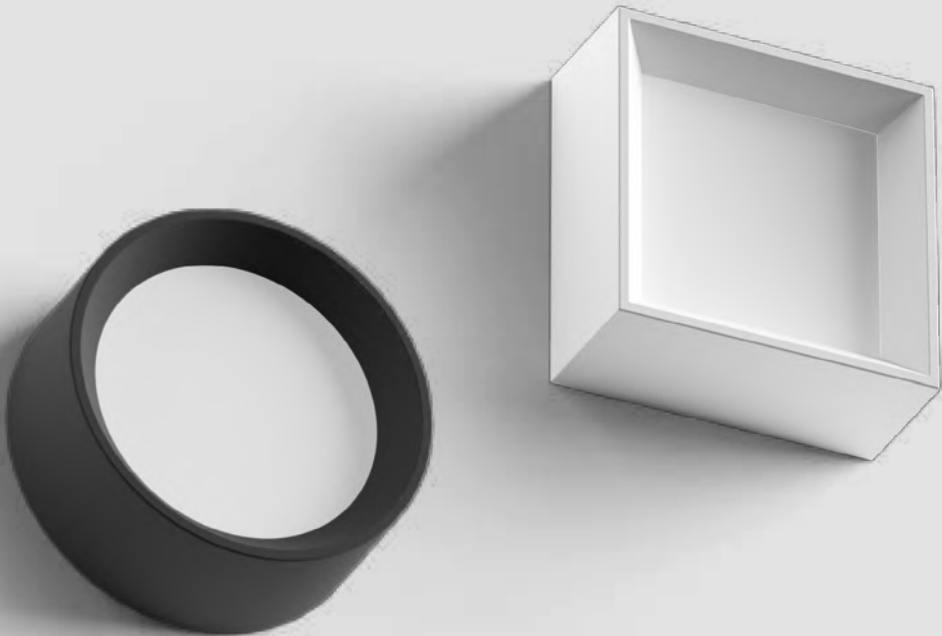

Tara Mini_R
topLED CRI 90 | 220-240 V
7 W DC - 8 W AC

65 |

Ø 162 |



Opt	2700K 960 lmS - 788 lmD
DI	CA139DWHMDI
DI	CA139DBBMDI

Opt	3000K 1110 lmS - 829 lmD
DI	CA139DWHWDI
DI	CA139DBBWDI

Tara Mini_Q
topLED CRI 90 | 220-240 V
7 W DC - 8 W AC

65 |

□ 152 |



Opt	2700K 1110 lmS - 784 lmD
DI	CA026DWHMDI
DI	CA026DBBMDI

Opt	3000K 1168 lmS - 825 lmD
DI	CA026DWHWDI
DI	CA026DBBWDI






POLO





233

Diffuseur en polyéthylène.
Monture en polycarbonate blanc.

*Polyethylene diffuser.
White polycarbonate fixture.*

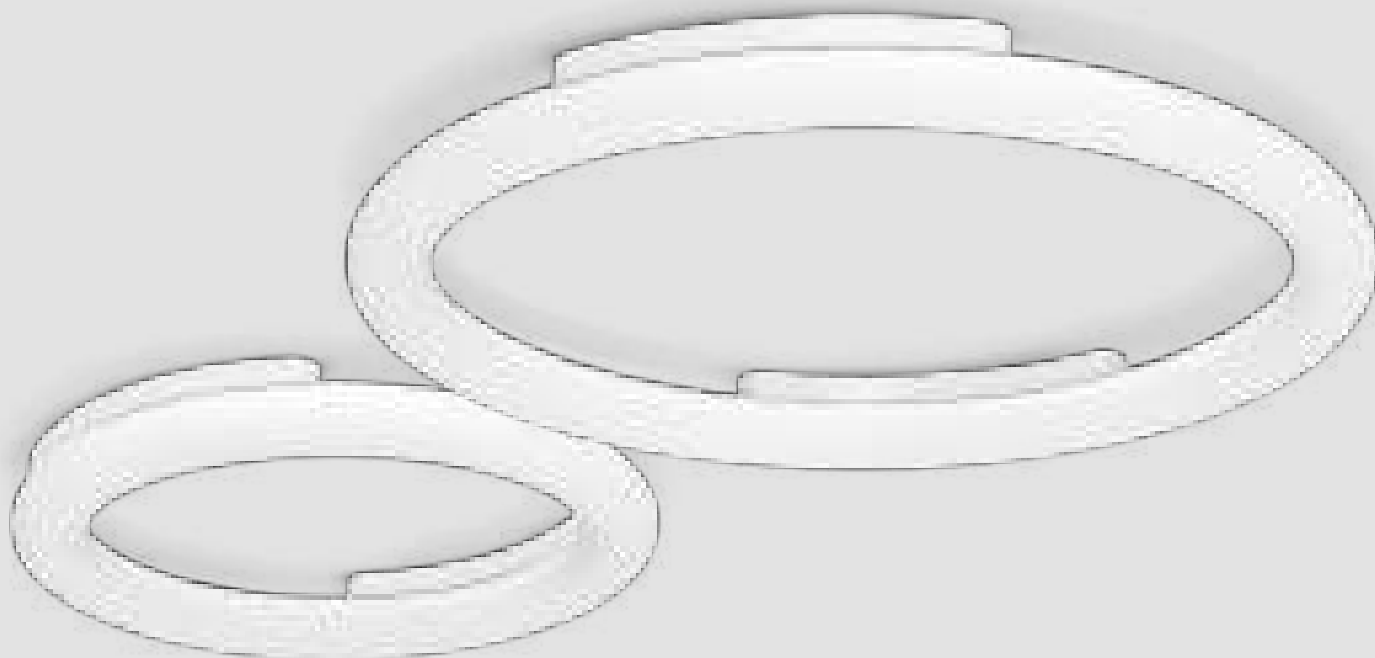**Polo_S**



topLED CRI 80 | 220-240 V
27 W DC - 31 W AC



Opt | 3000K 3568 lms - 3222 lmD
DI | **9160**

Polo_S

topLED CRI 80 | 220-240 V
45 W DC - 51 W AC



Opt | 3000K 5966 lms - 5118 lmD
DI | **9161**



KIT0107 et KIT0108 (vendus séparément) permettent de centrer parfaitement la lampe sur le point lumineux, ou de réaliser des configurations décentralisées.

KIT0107 e KIT0108 (sold separately) allow the lamp to be perfectly centred on the lighting point, or to achieve decentralized configurations.

*** DALI decentralization kit required for DALI dimming.**
Find it in "Electronics".

Electronics

Polo_S 27 W / 45 W
KIT0107 Ø 80mm canopy kit

Polo_S 45 W
KIT0108 Decentralization kit (Ø 160mm canopy + DALI driver)

Finishes ☐ Natural polyethylene










Corps en métal peint blanc mat ou dans les finitions à effet brossé dark grey et bruni.
Diffuseur en polyméthacrylate de méthyle opalin.

Metal body painted in matt white or in dark grey and burnished finishes with brushed effect. Diffuser in opal polymethylmethacrylate.




Crew_1
topLED CRI 80 | 220-240 V
11 W DC - 12 W AC




Opt	3000K	1253 lms	- 900 lmD
DI	8270		
DI	8271		
DI	8272		

Crew_1
topLED CRI 80 | 220-240 V
14 W DC - 17 W AC



Opt	3000K	1628 lms	- 1200 lmD
DI	8275		
DI	8276		
DI	8277		

Crew_1
topLED CRI 80 | 220-240 V
21 W DC - 22 W AC



Opt	3000K	2460 lms	- 1800 lmD
DI	8280		
DI	8281		
DI	8282		





CREW



271

Corps en métal peint dans les finitions mates blanc/blanc, blanc/cuivre, sable/vert tiffany, noir/blanc, noir/or. Diffuseur en polyméthacrylate de méthyle opalin.


Metal body painted in the matt finishes white/white, white/copper, sablé/tiffany green, black/white, black/gold. Diffuser in opal polymethylmethacrylate.

**Crew_2**

topLED CRI 80 | 220-240 V
11 W DC - 12 W AC

74 |



Ø 262



Opt	3000K	1253 lms	824 lmD
DI	8285		
DI	8286		
DI	8287		
DI	8288		
DI	8289		

Crew_2



topLED CRI 80 | 220-240 V
14 W DC - 17 W AC



Opt	3000K	1628 lms	1097 lmD
DI	8292		
DI	8293		
DI	8294		
DI	8295		
DI	8296		

Crew_2


topLED CRI 80 | 220-240 V
21 W DC - 22 W AC



Opt	3000K	2460 lms	1648 lmD
DI	8299		
DI	8300		
DI	8301		
DI	8302		
DI	8303		

Crew_2 Maxi

topLED CRI 80 | 220-240 V
36 W DC - 38 W AC



Opt	3000K	4339 lms	2745 lmD
DI	CA126AWHWDI		
DI	CA126AX1WDI		
DI	CA126AWBWDI		
DI	CA126AX2WDI		
DI	CA126AX3WDI		

Finishes

	Painted white		Painted white/Painted copper		Painted black/Painted gold
	Painted black		Painted white/Painted black		Painted sablé/Painted tiffany green







K100

Corps en aluminium anodisé ou peint texturé blanc.
Diffuseur en polycarbonate opalin.

*Anodised or textured painted aluminium body.
Opal polycarbonate diffuser.*

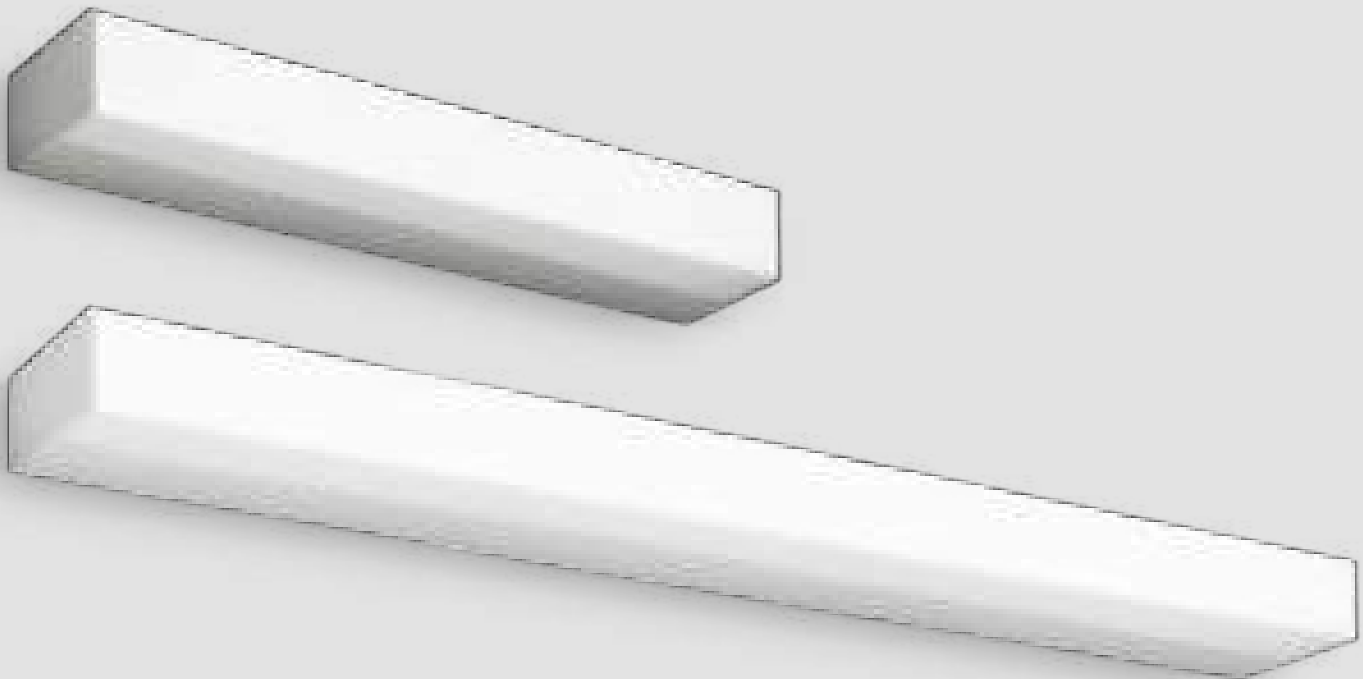

K100
topLED CRI 90 | 220-240 V
12 W DC - 14 W AC



Opt	3000K	1516 lmS - 1004 lmD
DI	7904	
DI	7905	

K100
topLED CRI 90 | 220-240 V
24 W DC - 28 W AC



Opt	3000K	3030 lmS - 2030 lmD
DI	7906	
DI	7907	

Finishes


- Text white R9003
- Anodised aluminium






Corps en aluminium poli ou peint texturé blanc ou noir.
Diffuseur en polyméthacrylate de méthyle opalin.

*Body in polished or textured painted aluminium in white or black finishes.
Opal polymethylmethacrylate diffuser.*

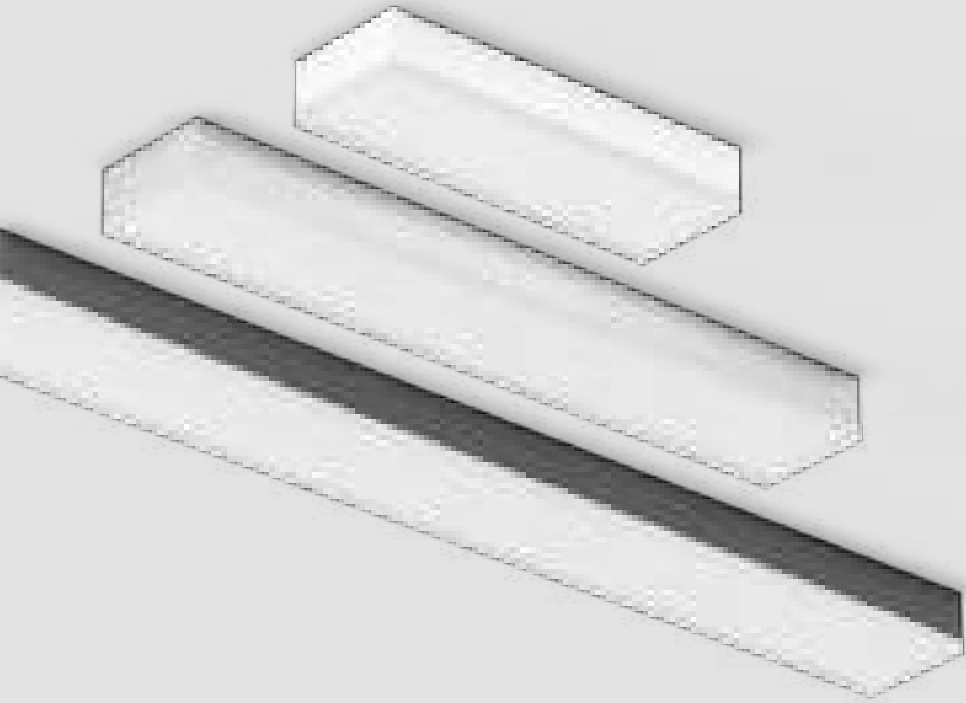


Igloo_S ON/OFF
topLED CRI 90 | 220-240 V
16 W DC - 20 W AC




Opt	3000K	2306 lmS - 1316 lmD
DI	9135	
DI	9136	
DI	9137	

Igloo_S DALI
topLED CRI 90 | 220-240 V
16 W DC - 20 W AC



Opt	3000K	2306 lmS - 1316 lmD
DI	9138	
DI	9139	
DI	9140	

Igloo_S DALI
topLED CRI 90 | 220-240 V
33 W DC - 36 W AC



Opt	3000K	4470 lmS - 3139 lmD
DI	9141	
DI	9142	
DI	9143	

Igloo_S DALI
topLED CRI 90 | 220-240 V
50 W DC - 53 W AC



Opt	3000K	6636 lmS - 4833 lmD
DI	9144	
DI	9145	
DI	9146	

Electronics


DALI versions
KIT0079 DALI CASAMBI dimmer - 1 art.

Accessories


Igloo_S DALI 16 W
KIT0096 Bracket for modular config.

Igloo_S DALI 33 W
KIT0098 Bracket for modular config.

Igloo_S DALI 53 W
KIT0099 Bracket for modular config.

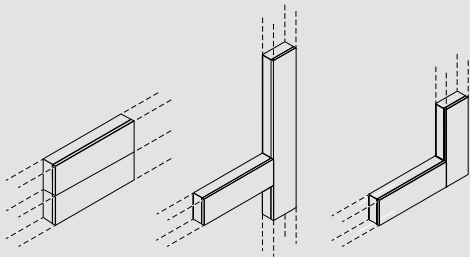

Finishes Text white R9003 Polished aluminium
 Text black R9005

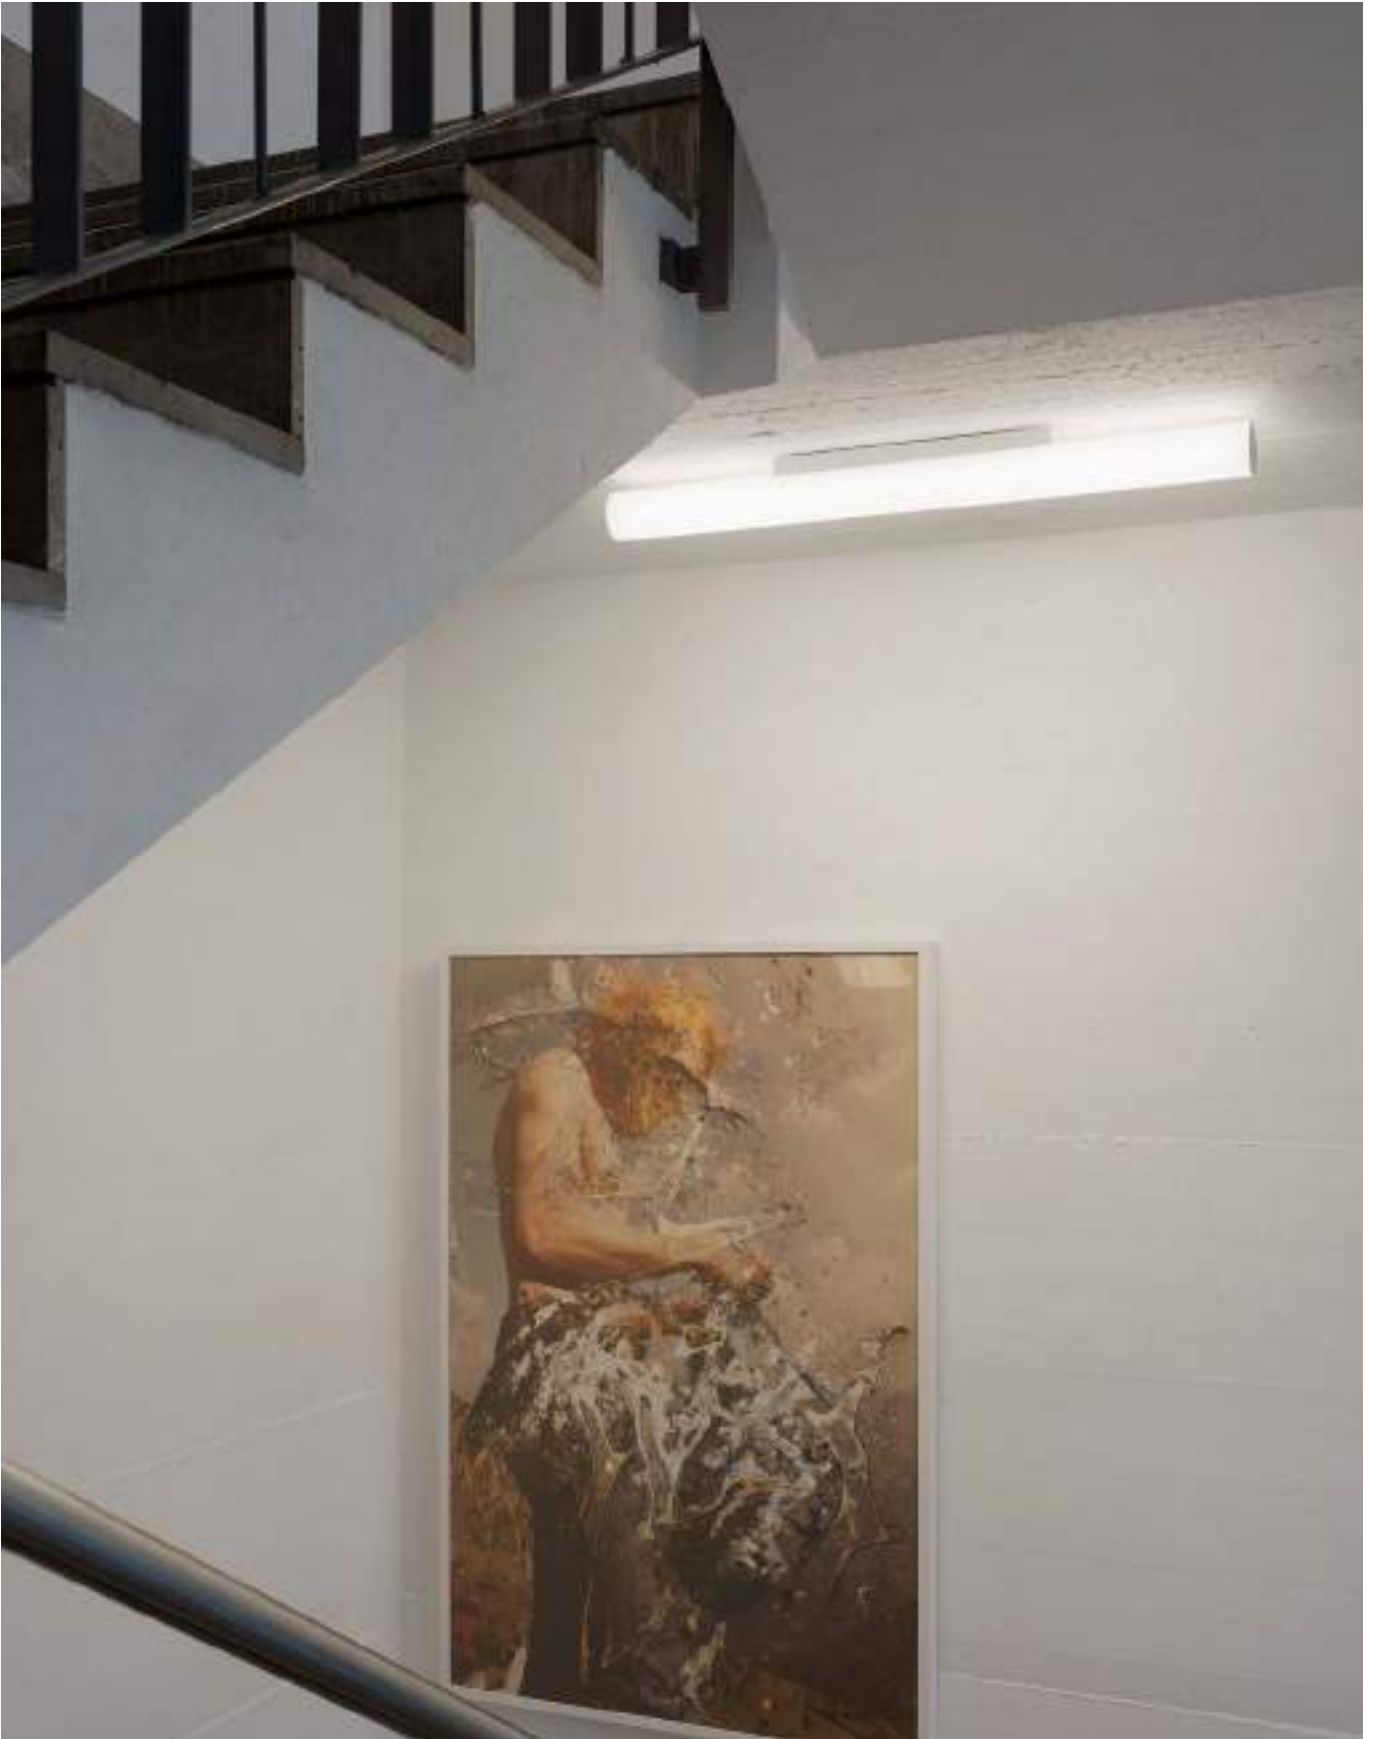





Diffuseur en polyméthacrylate de méthyle opalin.
Bouchons de fermeture en aluminium peint texturé blanc.

Diffuser in opal polymethylmethacrylate.
Closing caps in white textured painted aluminium.





TU-Top
topLED CRI 80 | 220-240 V
32 W DC - 36 W AC



Opt	3000K 4764 lmS - 4108 lmD
DI	8850
Opt	4000K 5098 lmS - 4395 lmD
DI	8850N

TU-Top
topLED CRI 80 | 220-240 V
41 W DC - 48 W AC



Opt	3000K 6234 lmS - 5370 lmD
DI	8851
Opt	4000K 6670 lmS - 5746 lmD
DI	8851N

Electronics

KIT0079 DALI CASAMBI dimmer - 1 art.





ARUBA





281

Diffuseur en verre transparent avec bord sablé asymétrique. Élément central en métal dans les finitions galvanisées cuivre, or, chrome ou peint texturé blanc. Monture en métal peint texturé blanc.

Diffuser in clear glass with asymmetrical sandblasted edge. Central element in metal in copper, gold, chrome galvanic finishes or white textured painted. White textured painted fixture.





Aruba_S
topLED CRI 90 | 220-240 V
17 W DC - 19 W AC



Opt	3000K	2212 lmS - 1794 lmD
DI	8920	
DI	8921	
DI	8922	
DI	8923	

Aruba_S
topLED CRI 90 | 220-240 V
35 W DC - 38 W AC



Opt	3000K	4228 lmS - 3388 lmD
DI	8924	
DI	8925	
DI	8926	
DI	8927	

Finishes

Text white R9003	Polished (galvanic) copper
Polished (galvanic) chrome	Polished (galvanic) gold





Diffuseur en verre transparent avec bord sablé. Élément central et
monture en métal peint texturé blanc.

*Diffuser in clear glass with sandblasted edge.
Central element and fixture in white textured painted metal.*





Antigua_S
topLED CRI 90 | 220-240 V
17 W DC - 19 W AC





Opt | 3000K 2165 lmS - 1473 lmD
DI | **90345**

Antigua_S
topLED CRI 90 | 220-240 V
35 W DC - 38 W AC



Opt | 3000K 3996 lmS - 2945 lmD
DI | **90346**

Antigua_S
topLED CRI 90 | 220-240 V
43 W DC - 46 W AC



Opt | 3000K 4596 lmS - 3760 lmD
DI | **90347**

Finishes ☐ Text white R9003




Corps en métal peint texturé dans les variantes de couleur blanc, noir, peach, petrol et deep blue. La monture en métal peint reprend la couleur du corps de la lampe.


*Textured painted metal body in white, black, peach, petrol and deep blue.
The painted metal fixture matches the colour of the lamp body.*



Doge_S
220-240 V

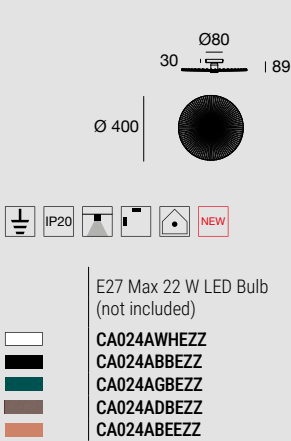

Doge_S
220-240 V

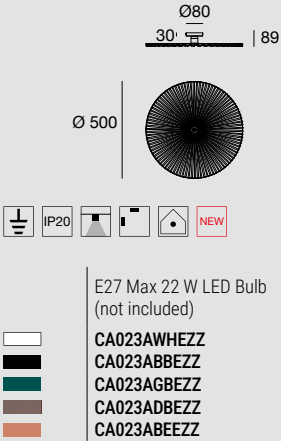









BASIN




299

Corps en aluminium peint texturé dans les couleurs blanc, noir, peach, petrol et deep blue à l'extérieur. Intérieur peint blanc. Élément central assorti à la finition extérieure.

Painted textured aluminium body in white, black, peach, petrol and deep blue on the outside. White painted interior. Central element in the same colour as the exterior paintwork.

Basin_S

topLED CRI 90 | 220-240 V
32 W DC - 35 W AC



Opt 2700K 3248 lmS - 2104 lmD

DI	CA050DWHMDI
DI	CA050DBBMDI
DI	CA050DBEMDI
DI	CA050DGBMDI
DI	CA050DLUMDI

Opt 3000K 3410 lmS - 2215 lmD

DI	CA050DWHWDI
DI	CA050DBBWDI
DI	CA050DBEWDI
DI	CA050DGBWDI
DI	CA050DLUWDI

* **DIMMER REQUIRED.** Find it in "Electronics".

Electronics

KIT0026	Phase-cut dimmer - 100 W
KIT0080	Phase-cut CASAMBI dim - 1 art.

Finishes	Text white R9003	Text peach R3012	Text deep blue R5011
	Text black R9005	Text petrol R6004	





INDOOR

BIRBA	363
BART	365
BEEBO	367
DUCK	369
SNAKE	371
DUBLIGHT	373
REGOLO	375
METAL	381
SKINNY	383
HYPE	385
GYPSUM PAINT	387
BOX	389
SATORI	393
HALFPIPE	397
STRAIGHT	399
ANTILLE	401
GEMINI	403
GEMINI PAINT	407
JOINT	409
YO-YO	411
POE	413
ALBA	415
CURVÈ	417




WALL





BIRBA




Corps en laiton poli, aluminium poli ou aluminium peint texturé blanc.
Support applique en métal peint texturé blanc.

Body in polished brass, polished or white textured painted aluminium.
Fixture in white textured painted metal.



Birba_W1 Mono emission
220-240 V




GU10 Max 7 W LED Bulb
(not included)



9391
9393
9394

Birba_W2 Bi emission
220-240 V



GU10 Max 2x7 W LED Bulb
(not included)



9397
9399
9400






BART



143


Tête et corps en aluminium peint texturé blanc ou noir.
Diffuseur en polycarbonate transparent.

Head and body in white or black textured painted aluminium.
Diffuser in clear polycarbonate.

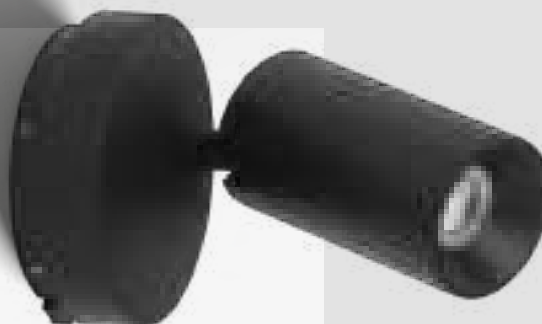

Bart_W

arrayLED CRI 90 | 220-240 V
4 W DC - 5 W AC



Opt	3000K 627 lmS - 434 lmD
 37°	7956
37°	7957

Finishes  Text white R9003
 Text black R9005





BEEBO




145

Tête en aluminium peint texturé blanc ou noir. Corps en aluminium peint texturé blanc ou noir ou en bois de chêne. Diffuseur en polycarbonate transparent.

Head in white or black textured painted aluminium. Body in white or black textured painted aluminium or in oak wood. Diffuser in clear polycarbonate.

**Beebo_W**

arrayLED CRI 90 | 220-240 V
4 W DC - 5 W AC



Opt	3000K 627 lmS - 434 lmD
37°	7972
37°	7973
37°	7974

Finishes Text white R9003 Oak wood
 Text black R9005





DUCK




147

Corps en aluminium peint texturé blanc ou noir.
Sphère en métal avec finition galvanique or ou chrome.

*Body in white or black textured painted aluminium.
Metal sphere in galvanic gold or chrome.*



Duck_W
powerLED CRI 90 | 220-240 V
4 W DC - 5 W AC



Opt	2700K 372 lmS - 322 lmD
□ 45°	9630M
■ 45°	9631M

Opt	3000K 400 lmS - 346 lmD
□ 45°	9630
■ 45°	9631

Finishes □ || Text white R9003 / Polished (galvanic) chrome
■ || Text black R9005 / Polished (galvanic) gold





SNAKE




Corps tubulaire en Santoprene™ blanc ou noir mat.
Diffuseur en polycarbonate satiné.
Support en aluminium peint texturé blanc ou noir.

*Tubular body in matt white or black Santoprene™.
Satin polycarbonate diffuser.
White or black textured painted aluminium fixture.*



Snake_W1


topLED CRI 90 | 220-240 V
1,5 W DC - 2 W AC



Opt	3000K 178 lmS - 125 lmD
DI	7220
DI	7221

Snake_W1 Switch


topLED CRI 90 | 220-240 V
1,5 W DC - 2 W AC



Opt	3000K 178 lmS - 125 lmD
DI	7232
DI	7233

Snake_W3


topLED CRI 90 | 220-240 V
1,5 W DC - 2 W AC



Opt	3000K 178 lmS - 117 lmD
DI	7226
DI	7227

Snake_W3 Switch

topLED CRI 90 | 220-240 V
1,5 W DC - 2 W AC



Opt	3000K 178 lmS - 117 lmD
DI	7234
DI	7235

Finishes Text white R9003
 Text black R9005






DUBLIGHT




Corps en métal peint texturé blanc.
Diffuseur en polyméthacrylate de méthyle satiné.

*Body in white textured painted metal.
Satin-finish polymethylmethacrylate diffuser.*

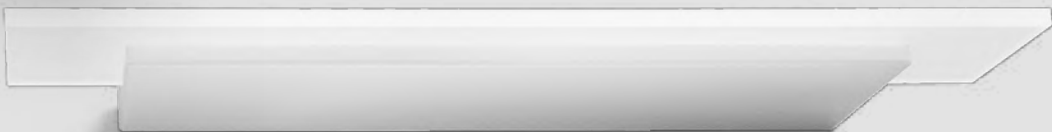


Dublight
topLED CRI 80 | 220-240 V
12 W DC - 13 W AC



Opt 3000K 1574 lmS - 813 lmD
DI 7486

Dublight
topLED CRI 80 | 220-240 V
24 W DC - 27 W AC



Opt 3000K 3148 lmS - 1713 lmD
DI 7487



Regolo | V2 | mono-emission
topLED CRI 90 | 220-240 V
12 W DC - 14 W AC




Opt	2700K 1728 lmS - 1093 lmD
DI	CA036DWHMDI
DI	CA036DBBMDI
DI	CA036DMGMDI
Opt	3000K 1858 lmS - 1175 lmD
DI	CA036DWHWDI
DI	CA036DBBWDI
DI	CA036DMGWDI




REGOLO

Corps en aluminium peint texturé blanc, noir ou gris.
Diffuseur en polycarbonate opalin.

Body in white, black or grey textured painted aluminium.
Opal polycarbonate diffuser.

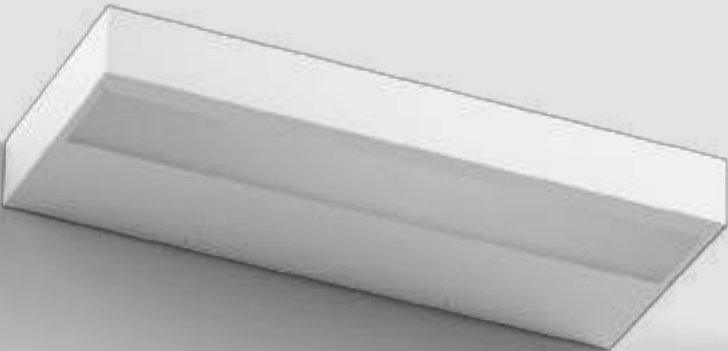


Regolo | V2 | mono-emission
topLED CRI 90 | 220-240 V
17 W DC - 19 W AC



Opt | 2700K 2481 lmS - 1647 lmD
DI | CA037DWHMDI
DI | CA037DBBMDI
DI | CA037DMGMDI

Opt | 3000K 2668 lmS - 1771 lmD
DI | CA037DWHWDI
DI | CA037DBBWDI
DI | CA037DMGWDI


Regolo | V2 | mono-emission
topLED CRI 90 | 220-240 V
26 W DC - 30 W AC



Opt | 2700K 3920 lmS - 2588 lmD
DI | CA038DWHMDI
DI | CA038DBBMDI
DI | CA038DMGMDI

Opt | 3000K 4215 lmS - 2782 lmD
DI | CA038DWHWDI
DI | CA038DBBWDI
DI | CA038DMGWDI

Regolo | V2 | mono-emission
topLED CRI 90 | 220-240 V
35 W DC - 39 W AC



Opt | 2700K 5199 lmS - 3346 lmD
DI | CA039DWHMDI
DI | CA039DBBMDI
DI | CA039DMGMDI

Opt | 3000K 5590 lmS - 3598 lmD
DI | CA039DWHWDI
DI | CA039DBBWDI
DI | CA039DMGWDI


* DIMMER REQUIRED. Find it in "Electronics".

Electronics

KIT0026 Phase-cut dimmer - 100 W
KIT0080 Phase-cut CASAMBI dim - 1 art.

Finishes Text white R9003 Text basalt grey R7012
 Text black R9005

Regolo | V2 | double-emission
topLED CRI 90 | 220-240 V
17 W DC - 19 W AC




Opt	2700K 2531 lmS - 1933 lmD
DI	CA040DWHMDI
DI	CA040DBBMDI
DI	CA040DMGMDI
Opt	3000K 2721 lmS - 2079 lmD
DI	CA040DWHWDI
DI	CA040DBBWDI
DI	CA040DMGWDI



Corps en aluminium peint texturé blanc, noir ou gris.
Diffuseurs en polycarbonate opalin.
Uniquement sur Regolo double-emission L 613 : sources contrôlables séparément.

Body in white, black or grey textured painted aluminium.
Opal polycarbonate diffusers.
Only on Regolo double-emission L613: sources can be controlled separately.

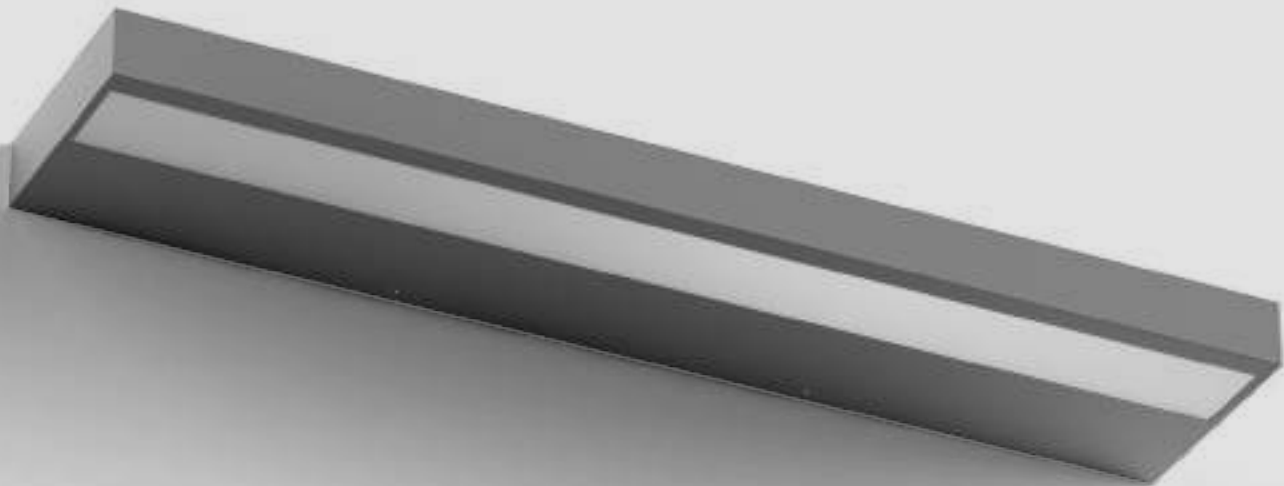


Regolo | V2 | double-emission
topLED CRI 90 | 220-240 V
23 W DC - 26 W AC




Opt	2700K 3550 lmS - 2724 lmD
DI	CA041DWHMDI
DI	CA041DBBMDI
DI	CA041DMGMDI
Opt	3000K 3817 lmS - 2929 lmD
DI	CA041DWHWDI
DI	CA041DBBWDI
DI	CA041DMGWDI

Regolo | V2 | double-emission
topLED CRI 90 | 220-240 V
35 W DC - 38 W AC



Opt	2700K 5300 lmS - 3964 lmD
DI	CA042DWHMDI
DI	CA042DBBMDI
DI	CA042DMGMDI
Opt	3000K 5699 lmS - 4262 lmD
DI	CA042DWHWDI
DI	CA042DBBWDI
DI	CA042DMGWDI

Regolo | V2 | double-emission
topLED CRI 90 | 220-240 V
46 W DC - 51 W AC



Opt	2700K 7090 lmS - 5383 lmD
DI	CA043DWHMDI
DI	CA043DBBMDI
DI	CA043DMGMDI
Opt	3000K 7624 lmS - 5788 lmD
DI	CA043DWHWDI
DI	CA043DBBWDI
DI	CA043DMGWDI

* DIMMER REQUIRED. Find it in "Electronics".

Electronics

KIT0026	Phase-cut dimmer - 100 W
KIT0080	Phase-cut CASAMBI dim - 1 art.

Finishes	Text white R9003	Text basalt grey R7012
	Text black R9005	










METAL

Corps en aluminium peint texturé blanc ou noir.
Diffuseur en polyméthacrylate de méthyle opalin.

*White or black textured painted aluminium body.
Opal polymethylmethacrylate diffuser.*



Metal
powerLED CRI 90 | 220-240 V
9 W DC - 11 W AC



Opt	2700K 1027 lmS - 685 lmD
DI	90320M
DI	90332M
Opt	3000K 1104 lmS - 737 lmD
DI	90320
DI	90332


Finishes Text white R9003
 Text black R9005

Metal
powerLED CRI 90 | 220-240 V
17 W DC - 20 W AC



Opt	2700K 1944 lmS - 1244 lmD
DI	90322M
DI	90333M
Opt	3000K 2090 lmS - 1338 lmD
DI	90322
DI	90333

Metal
powerLED CRI 90 | 220-240 V
26 W DC - 30 W AC



Opt	2700K 2862 lmS - 1867 lmD
DI	90324M
DI	90334M
Opt	3000K 3077 lmS - 2007 lmD
DI	90324
DI	90334






SKINNY

Corps en aluminium anodisé ou peint texturé blanc.
Diffuseur en polyméthacrylate de méthyle avec micro-incisions
au laser (OptiLight Technology™).

*Body in anodised aluminium or textured painted white.
Polymethylmethacrylate diffuser with laser micro-engraving
(OptiLight Technology™).*




Skinny
topLED CRI 90 | 220-240 V
12 W DC - 14 W AC



Opt	2700K	1409 lmS - 898 lmD
DI	7908M	
DI	7909M	
Opt	3000K	1515 lmS - 956 lmD
DI	7908	
DI	7909	

Skinny
topLED CRI 90 | 220-240 V
24 W DC - 28 W AC




Opt	2700K	2820 lmS - 1848 lmD
DI	7910M	
DI	7911M	
Opt	3000K	3032 lmS - 1968 lmD
DI	7910	
DI	7911	






Corps en aluminium peint texturé blanc, noir ou dark brown.
Diffuseur en polyméthacrylate de méthyle opalin.

White, black or dark brown painted textured aluminium body.
Opal polymethylmethacrylate diffuser.

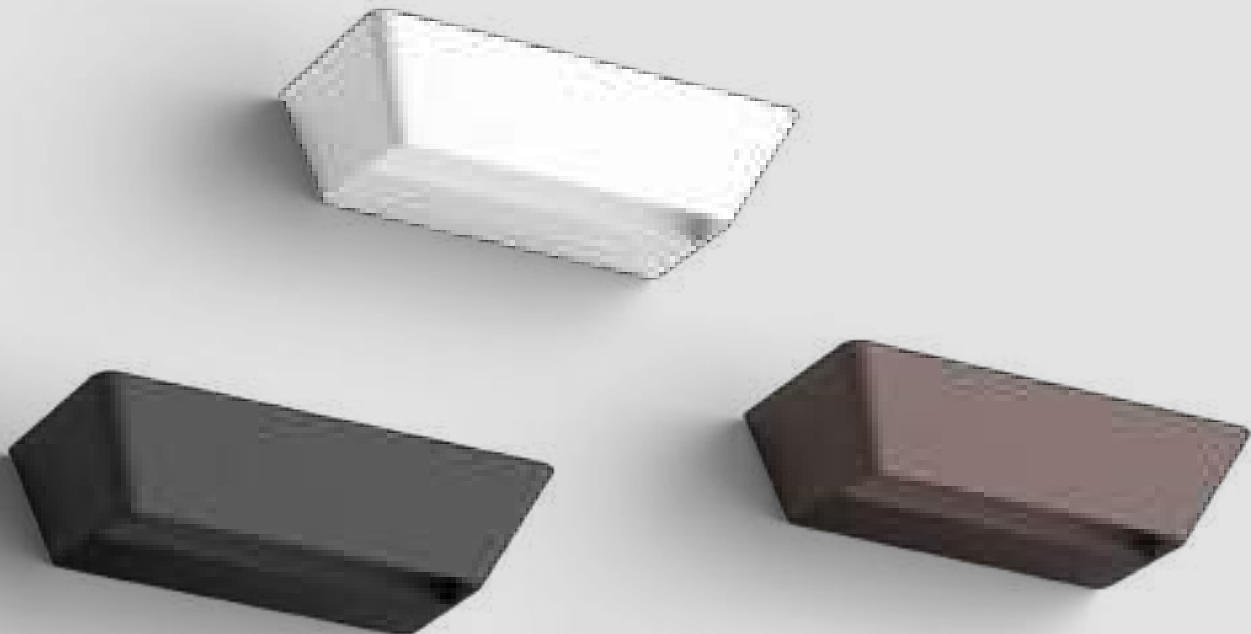

Hype
topLED CRI 90 | 220-240 V
25 W DC - 27 W AC



Opt	2700K 3002 lmS - 1784 lmD
DI	CA075DWHMDI
DI	CA075DBBMDI
DI	CA075DDBMDI
Opt	3000K 3127 lmS - 1858 lmD
DI	CA075DWHWDI
DI	CA075DBBWDI
DI	CA075DDBWDI

* DIMMER REQUIRED. Find it in "Electronics".

Electronics

KIT0026	Phase-cut dimmer - 100 W
KIT0080	Phase-cut CASAMBI dim - 1 art.

Finishes Text white R9003 Dark brown
 Text black R9005





Corps en plâtre peint. Diffuseur en verre sablé.

Paintable plaster body. Sandblasted glass diffuser.

GYPSUM PAINT




73

427

Gypsum_W1 Mono Emission

topLED CRI 90 | 220-240 V
7 W DC - 7,5 W AC




Opt | 2700K 887 lmS - 496 lmD
DI | **60834M00**

Opt | 3000K 934 lmS - 522 lmD
DI | **60834W00**

Gypsum_W2 Bi Emission

topLED CRI 90 | 220-240 V
13 W DC - 15 W AC




Opt | 2700K 1580 lmS - 987 lmD
DI | **60817M00**

Opt | 3000K 1663 lmS - 1039 lmD
DI | **60817W00**

Gypsum_W3 Bi Emission

topLED CRI 90 | 220-240 V
22 W DC - 25 W AC



Opt | 2700K 2701 lmS - 1688 lmD
DI | **60819M00**

Opt | 3000K 2844 lmS - 1777 lmD
DI | **60819W00**

Finishes  White gypsum


Box_W1 Mono Emission

topLED CRI 80 | 220-240 V

5 W DC - 6 W AC

| 38

139

| 86



Opt | 2700K 525 lmS - 444 lmD

	DI	8770M
	DI	8771M
	DI	9540M
	DI	8912M
	DI	8913M

Opt | 3000K 540 lmS - 499 lmD

	DI	8770
	DI	8771
	DI	9540
	DI	8912
	DI	8913

Opt | 4000K 596 lmS - 550 lmD

	DI	8770N
	DI	8771N
	DI	9540N




BOX




97 319

Corps en métal peint blanc ou noir texturé, gris ciment, laiton ou cuivre brossé.
Diffuseur en polyméthacrylate de méthyle opalin.

Body in white or black textured painted metal, concrete grey, brass or brushed copper.
Opal polymethylmethacrylate diffuser.

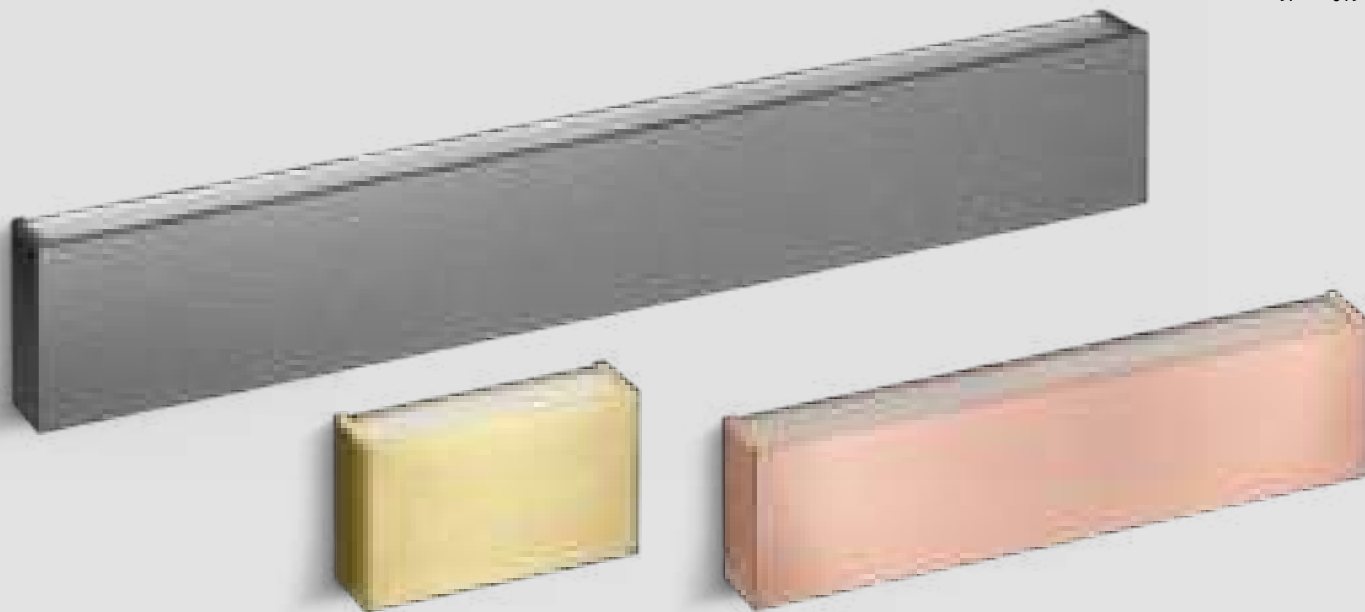**Box_W1 Mono Emission**

topLED CRI 80 | 220-240 V
13 W DC - 14 W AC




Opt	2700K 1484 lmS - 1004 lmD
DI	8772M
DI	8773M
DI	9541M
DI	8914M
DI	8915M

Opt	3000K 1543 lmS - 1168 lmD
DI	8772
DI	8773
DI	9541
DI	8914
DI	8915

Opt	4000K 1677 lmS - 1285 lmD
DI	8772N
DI	8773N
DI	9541N

Box_W1 Mono Emission

topLED CRI 80 | 220-240 V
26 W DC - 28 W AC




Opt	2700K 2968 lmS - 2007 lmD
DI	8774M
DI	8775M
DI	9542M
DI	8916M
DI	8917M

Opt	3000K 3087 lmS - 2334 lmD
DI	8774
DI	8775
DI	9542
DI	8916
DI	8917

Opt	4000K 3354 lmS - 2568 lmD
DI	8774N
DI	8775N
DI	9542N

Box_W1 Mono Emission

topLED CRI 80 | 220-240 V
40 W DC - 41 W AC



Opt	2700K 4452 lmS - 2940 lmD
DI	8776M
DI	8777M
DI	9543M
DI	8918M
DI	8919M

Opt	3000K 4630 lmS - 3419 lmD
DI	8776
DI	8777
DI	9543
DI	8918
DI	8919

Opt	4000K 5031 lmS - 3760 lmD
DI	8776N
DI	8777N
DI	9543N

* DIMMER REQUIRED. Find it in "Electronics".

Electronics

KIT0026 Phase-cut dimmer - 100 W
KIT0080 Phase-cut CASAMBI dim - 1 art.

Finishes

Text white R9003 Concrete Brushed natural brass
Text black R9005 Painted brushed copper

Box_W2 Bi Emission

topLED CRI 80 | 220-240 V

9 W DC - 10 W AC

 | 38

 139

 | 86



Opt	2700K 1043 lmS - 730 lmD
DI	8255M
DI	8261M
DI	9545M
DI	9532M
DI	9533M

Opt	3000K 1092 lmS - 795 lmD
DI	8255
DI	8261
DI	9545
DI	9532
DI	9533

Opt	4000K 1166 lmS - 895 lmD
DI	8255N
DI	8261N
DI	9545N



BOX



97 319


Corps en métal peint blanc ou noir texturé, gris ciment, laiton ou cuivre brossé.
Diffuseur en polyméthacrylate de méthyle opalin.

Body in white or black textured painted metal, concrete grey, brass or brushed copper.
Opal polymethylmethacrylate diffuser.



Box_W2 Bi Emission

topLED CRI 80 | 220-240 V
18 W DC - 19 W AC





Opt	2700K 2306 lms - 1314 lmD
DI	8256M
DI	8262M
DI	9546M
DI	9534M
DI	9535M

Opt	3000K 2370 lms - 1510 lmD
DI	8256
DI	8262
DI	9546
DI	9534
DI	9535

Opt	4000K 2598 lms - 1700 lmD
DI	8256N
DI	8262N
DI	9546N

Box_W2 Bi Emission

topLED CRI 80 | 220-240 V
25 W DC - 28 W AC




Opt	2700K 3425 lms - 1914 lmD
DI	8257M
DI	8263M
DI	9547M
DI	9536M
DI	9537M

Opt	3000K 3490 lms - 2225 lmD
DI	8257
DI	8263
DI	9547
DI	9536
DI	9537

Opt	4000K 3839 lms - 2501 lmD
DI	8257N
DI	8263N
DI	9547N

Box_W2 Bi Emission

topLED CRI 80 | 220-240 V
37 W DC - 41 W AC



Opt	2700K 5137 lms - 2800 lmD
DI	8258M
DI	8264M
DI	9548M
DI	9538M
DI	9539M

Opt	3000K 5235 lms - 3255 lmD
DI	8258
DI	8264
DI	9548
DI	9538
DI	9539

Opt	4000K 5758 lms - 3255 lmD
DI	8258N
DI	8264N
DI	9548N

* DIMMER REQUIRED. Find it in "Electronics".

Electronics

KIT0026 Phase-cut dimmer - 100 W
KIT0080 Phase-cut CASAMBI dim - 1 art.

Finishes Text white R9003 Concrete Brushed natural brass
 Text black R9005 Painted brushed copper





Corps en aluminium peint texturé blanc ou noir.
Diffuseur en polycarbonate opalin.

Body in white or black textured painted aluminium.
Opal polycarbonate diffuser.




SATORI



99 239

Satori_W

topLED CRI 90 | 220-240 V
17 W DC - 20 W AC



Opt	2700K 2622 lmS - 1689 lmD
DI	9174M
DI	9175M

Opt	3000K 2780 lmS - 1790 lmD
DI	9174
DI	9175





Opt	2700K 2622 lmS - 1689 lmD
DI	9180M
DI	9181M

Opt	3000K 2780 lmS - 1790 lmD
DI	9180
DI	9181

Satori_W

topLED CRI 90 | 220-240 V
24 W DC - 27 W AC



Opt	2700K 3749 lmS - 2370 lmD
DI	9176M
DI	9177M

Opt	3000K 3966 lmS - 2512 lmD
DI	9176
DI	9177





Opt	2700K 3749 lmS - 2370 lmD
DI	9182M
DI	9183M

Opt	3000K 3966 lmS - 2512 lmD
DI	9182
DI	9183

Satori_W

topLED CRI 90 | 220-240 V
35 W DC - 38 W AC



Opt	2700K 5624 lmS - 3106 lmD
DI	9178M
DI	9179M

Opt	3000K 5950 lmS - 3304 lmD
DI	9178
DI	9179



Opt	2700K 5624 lmS - 3106 lmD
DI	9184M
DI	9185M

Opt	3000K 5950 lmS - 3304 lmD
DI	9184
DI	9185

Electronics

Dali Version
KIT0079 DALI CASAMBI dimmer - 1 art.

Finishes Text white R9003
 Text black R9005











Corps en aluminium poli ou peint texturé blanc ou noir.
Diffuseur en polycarbonate opalin.

*Body in polished aluminium or white or black textured painted
aluminium. Opal polycarbonate diffuser.*

HALFPIPE

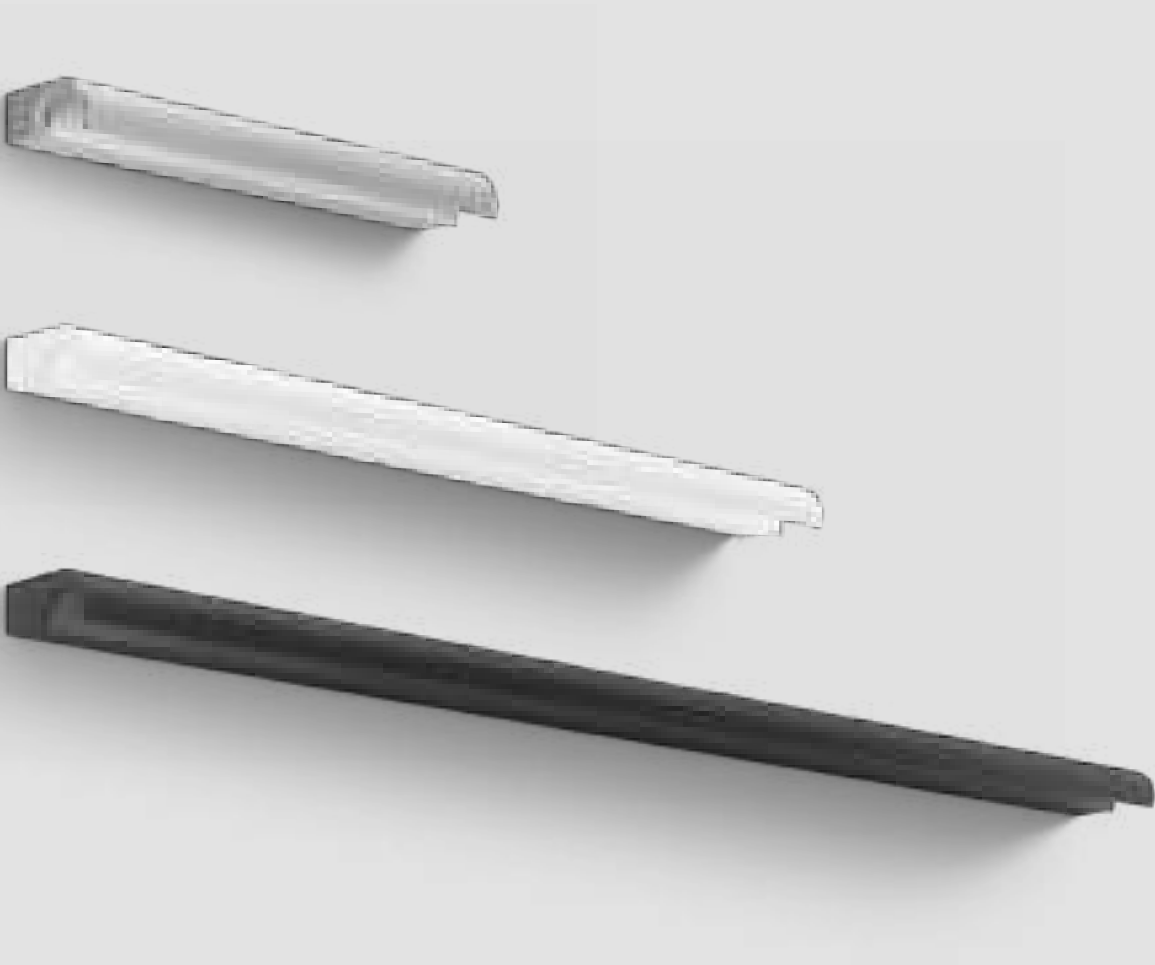


Halfpipe_W | V2
topLED CRI 90 | 220-240 V
9 W DC - 11 W AC




Opt	3000K	1175 lms	- 673 lmD
DI	9800		
DI	9801		
DI	9802		

Halfpipe_W | V2
topLED CRI 90 | 220-240 V
18 W DC - 21 W AC



Opt	3000K	2350 lms	- 1517 lmD
DI	9803		
DI	9804		
DI	9805		

Halfpipe_W | V2
topLED CRI 90 | 220-240 V
25 W DC - 28 W AC



Opt	3000K	3361 lms	- 1929 lmD
DI	9806		
DI	9807		
DI	9808		





STRAIGHT




243

Corps en aluminium peint texturé blanc ou noir, ou avec finition galvanique chrome. Diffuseur en polycarbonate opalin. Support en ABS.

Body in white or black textured painted aluminium or in galvanic chrome finish. Opal polycarbonate diffuser. ABS fixture.




Straight_W
topLED CRI 80 | 220-240 V |
11 W DC - 13 W AC



Opt	3000K	1354 lms	528 lmD
DI	8208		
DI	8210		
DI	8265		

Straight_W
topLED CRI 80 | 220-240 V |
15 W DC - 19 W AC



Opt	3000K	1957 lms	756 lmD
DI	8209		
DI	8211		
DI	8266		





ANTILLE





285

Diffuseur en verre transparent avec bord sablé asymétrique.
Élément central en métal avec finitions galvaniques cuivre, or, chrome
ou peint texturé blanc. Support en métal peint texturé blanc.

*Diffuser in clear glass with asymmetrical sandblasted edge.
Central element in metal in copper, gold, chrome galvanic finishes or
white textured painted. Fixture in white textured painted metal.*




Antille
stripLED CRI 90 | 220-240 V
11 W DC - 14 W AC



Opt	3000K	1640 lmS - 1457 lmD
DI	8880	
DI	8881	
DI	8882	
DI	8883	

Antille
stripLED CRI 90 | 220-240 V
23 W DC - 28 W AC




Opt	3000K	3363 lmS - 2912 lmD
DI	8885	
DI	8886	
DI	8887	
DI	8888	

Finishes Text white R9003 Polished (galvanic) chrome Polished (galvanic) copper Polished (galvanic) gold






GEMINI



113 475




Corps en métal peint texturé blanc avec panneau en grès aux finitions noir grec et statuaire, ou en verre à effet bronze miroir. Monture en métal peint texturé blanc.

White textured painted metal body with stoneware panel in Nero Greco and statuary finishes, or in glass with mirrored bronze effect. White textured painted metal fixture.

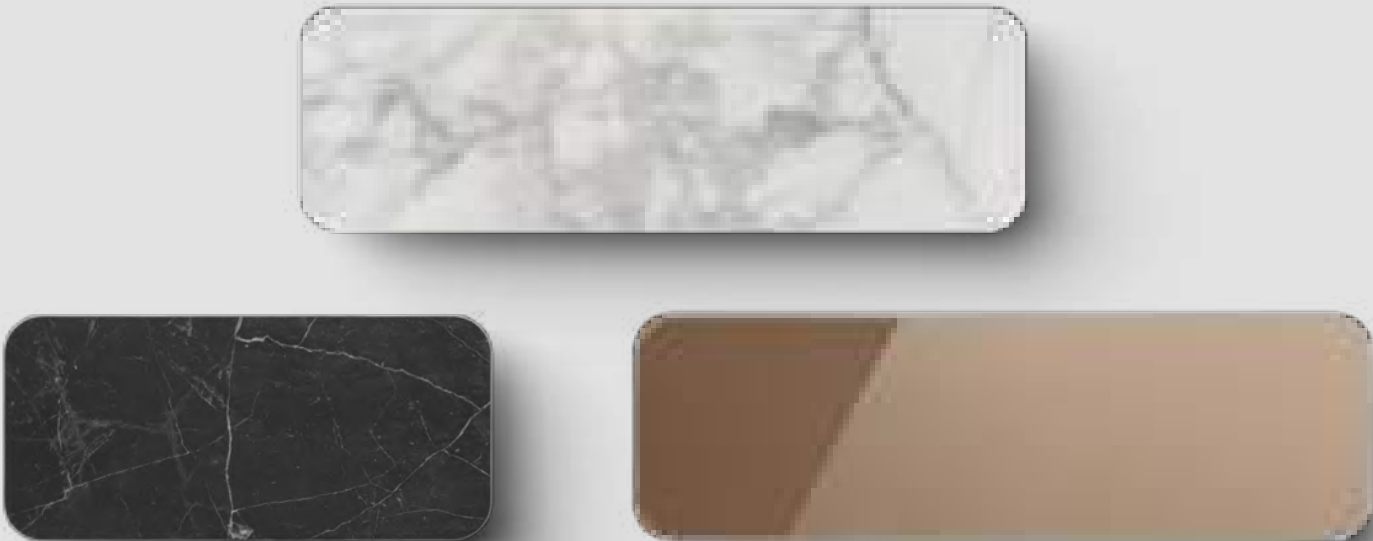

Gemini_W1



topLED CRI 90 | 220-240 V
13 W DC - 14 W AC



Opt	2700K 1230 lmS - 819 lmD
DI	9669M
DI	9670M
DI	9671M
Opt	3000K 1322 lmS - 880 lmD
DI	9669
DI	9670
DI	9671

Gemini_W1

topLED CRI 90 | 220-240 V
25 W DC - 28 W AC



Opt	2700K 2272 lmS - 1540 lmD
DI	9672M
DI	9673M
DI	9674M
Opt	3000K 2443 lmS - 1656 lmD
DI	9672
DI	9673
DI	9674

* DIMMER REQUIRED. Find it in "Electronics".

Electronics

KIT0026	Phase-cut dimmer - 100 W
KIT0080	Phase-cut CASAMBI dim - 1 art.





GEMINI




113 475

Corps en métal peint texturé blanc avec panneau en grès aux finitions noir grec et statuaire, ou en verre à effet bronze miroir. Monture en métal peint texturé blanc.

White textured painted metal body with stoneware panel in Nero Greco and statuary finishes, or in glass with mirrored bronze effect. White textured painted metal fixture.

**Gemini_W2**

topLED CRI 90 | 220-240 V
18 W DC - 19 W AC



Opt	2700K 2006 lmS - 1949 lmD
DI	9675M
DI	9676M
DI	9677M

Opt	3000K 2157 lmS - 2094 lmD
DI	9675
DI	9676
DI	9677

Finishes Nero greco Mirrored bronze
 Statuary






GEMINI PAINT



115



Corps en métal peint texturé blanc avec
panneau en plâtre peint. Monture en métal
peint texturé blanc.

*White textured painted metal body with paintable
plaster panel. White textured painted metal fixture.*

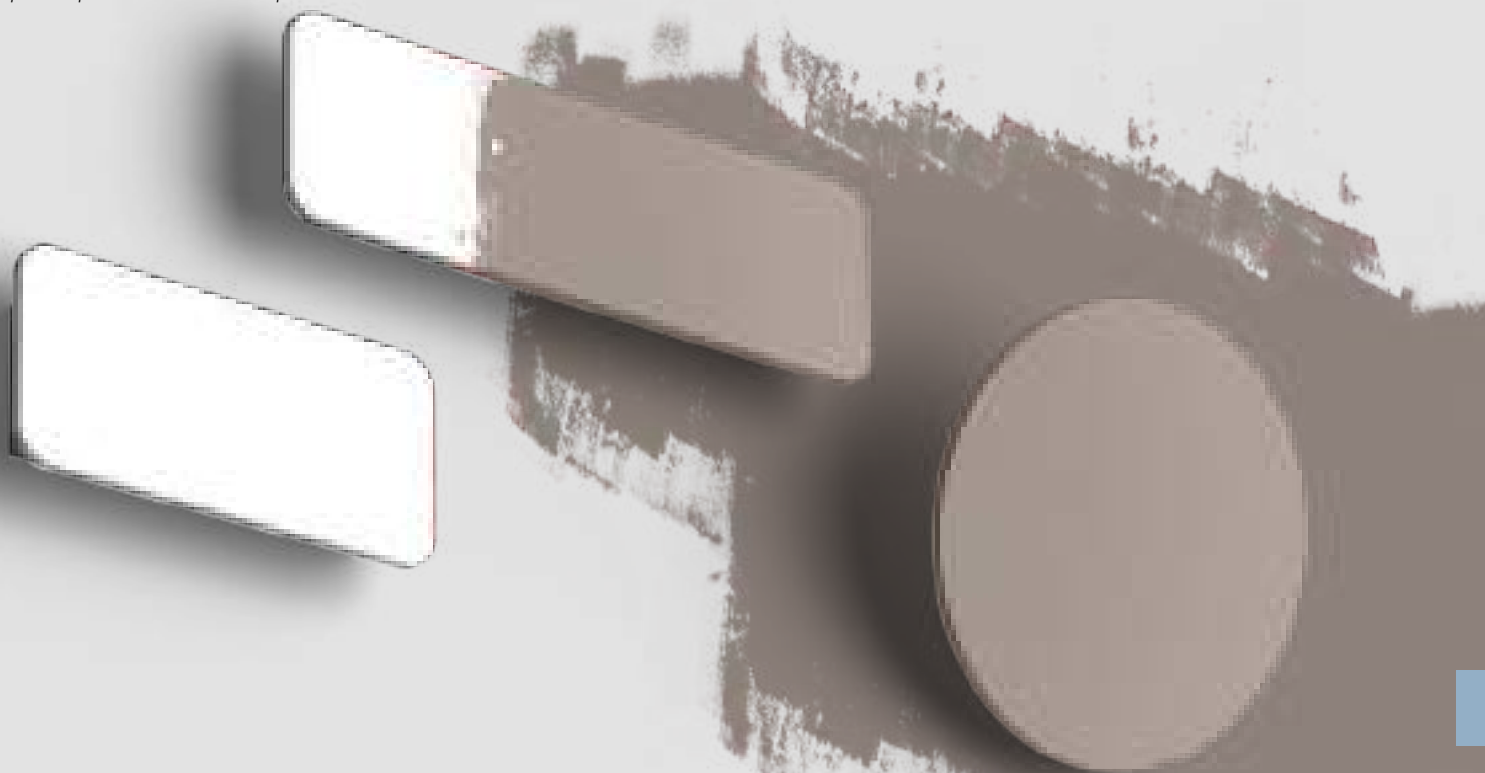

Gemini Paint_W1

topLED CRI 90 | 220-240 V
13 W DC - 14 W AC





Opt | 2700K 1230 lmS - 819 lmD
DI | **9933M**

Opt | 3000K 1322 lmS - 880 lmD
DI | **9933**

Gemini Paint_W1

topLED CRI 90 | 220-240 V
25 W DC - 28 W AC




Opt | 2700K 2272 lmS - 1540 lmD
DI | **9936M**

Opt | 3000K 2443 lmS - 1656 lmD
DI | **9936**

Gemini Paint_W2

topLED CRI 90 | 220-240 V
18 W DC - 19 W AC



Opt | 2700K 2006 lmS - 1949 lmD
DI | **9939M**

Opt | 3000K 2157 lmS - 2094 lmD
DI | **9939**

* DIMMER REQUIRED. Find it in "Electronics".

Electronics

KIT0026 Phase-cut dimmer - 100 W
KIT0080 Phase-cut CASAMBI dim - 1 art.

Finishes ☐ Gypsum white





JOINT




131

Corps et support en métal peint blanc texturé.
Diffuseur en polyméthacrylate de méthyle opalin.

*White textured painted metal body and fixture.
Opal polymethylmethacrylate diffuser.*

**Joint_W**

topLED CRI 90 | 220-240 V
17 W DC - 19 W AC



Opt	2700K 2234 lmS - 1135 lmD
DI	CA096DWHMDI
Opt	3000K 2352 lmS - 1195 lmD
DI	CA096DWHWDI

Joint_W

topLED CRI 90 | 220-240 V
17 W DC - 19 W AC



Opt	2700K 2234 lmS - 1135 lmD
DI	CA098DWHMDI
Opt	3000K 2352 lmS - 1195 lmD
DI	CA098DWHWDI

* DIMMER REQUIRED. Find it in "Electronics".

Electronics

KIT0026 Phase-cut dimmer - 100 W
KIT0080 Phase-cut CASAMBI dim - 1 art.

Finishes Opal PMMA + Text white 9003






YO-YO




269

Corps en aluminium peint texturé blanc, noir, gris ou rouge rubis.
Diffuseur en polyméthacrylate de méthyle opalin.

Body in white, black, grey or rubin red textured painted aluminium.
Diffuser in opal polymethylmethacrylate.

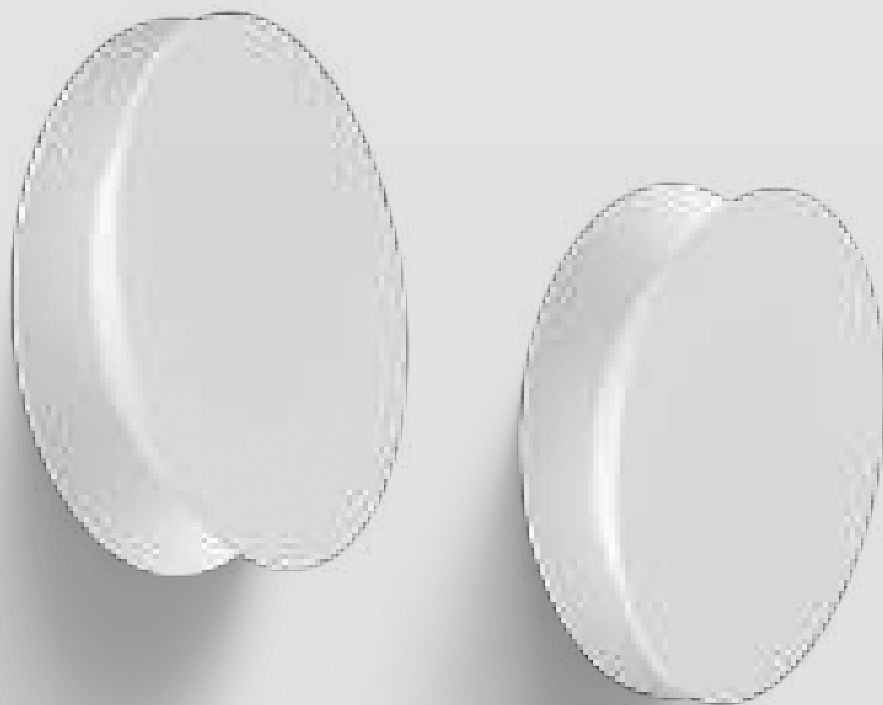**Yo-yo_W**

topLED CRI 90 | 220-240 V
23 W DC - 26 W AC



Opt	2700K	3303 lmS	- 2016 lmD
DI	9645M		
DI	9646M		
DI	9647M		
DI	9648M		

Opt	3000K	3552 lmS	- 2168 lmD
DI	9645		
DI	9646		
DI	9647		
DI	9648		

* **DIMMER REQUIRED.** Find it in "Electronics".

Electronics

KIT0026	Phase-cut dimmer - 100 W
KIT0080	Phase-cut CASAMBI dim - 1 art.




Finishes

Text white R9003	Text basalt grey R7012
Text black R9005	Text rubin R3003





POE





265 455

Corps en métal peint texturé blanc, noir ou gris, ou avec finition terre cuite.
Diffuseur en polycarbonate opalin. Le support en métal reprend la même
finition que le corps de la lampe.

*Body in white, black or grey textured painted metal, or in
terracotta finish. Opal polycarbonate diffuser.
The metal fixtures is in the same finish as the light body.*



Poe_W
topLED CRI 90 | 220-240 V
6 W DC - 7 W AC



Opt	3000K	740 lmS	536 lmD
DI	8500		
DI	8501		
DI	8503		
DI	8504		

Finishes Text white R9003 Text basalt grey R7012
Text black R9005 Text terracotta






ALBA





OUT

Corps et support en aluminium peint texturé blanc ou noir.
Diffuseur en verre transparent.

*Body and mount in white or black textured painted aluminium.
Diffuser in clear glass.*

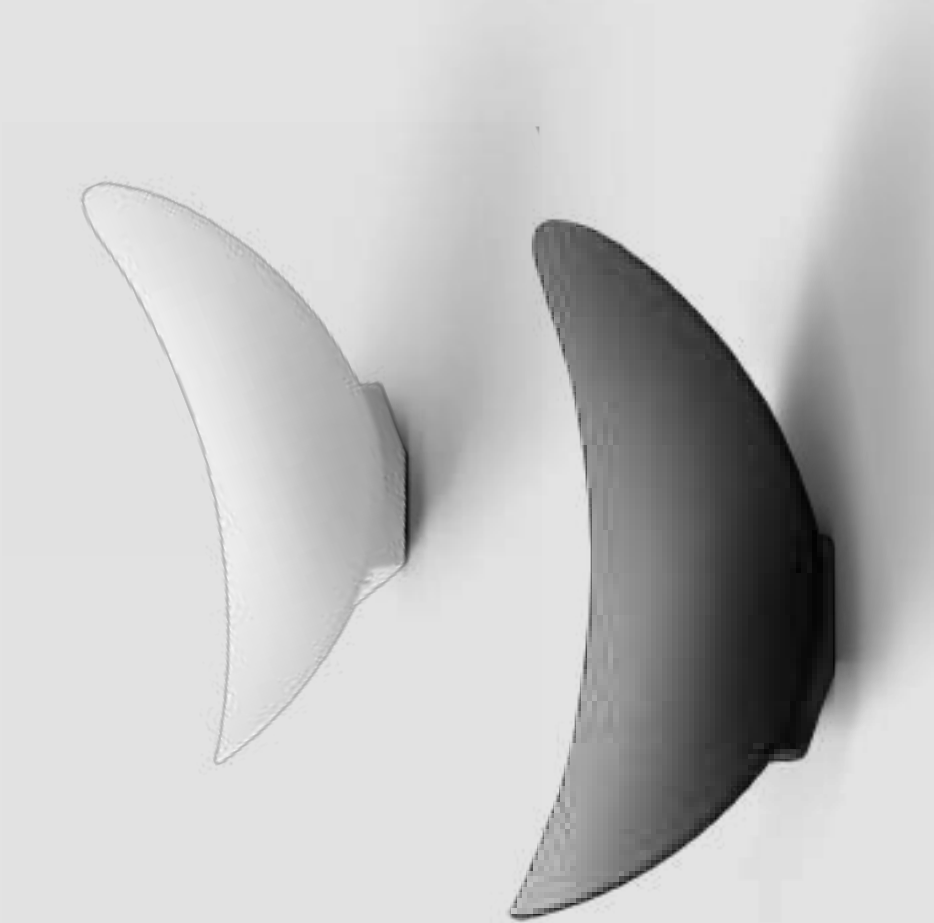

Alba
arrayLED CRI 90 | 220-240 V
31 W DC - 34 W AC



Opt	2700K 2297 lmS - 2194 lmD
DI	9658M
DI	9659M
Opt	3000K 2470 lmS - 2349 lmD
DI	9658
DI	9659

Finishes Text white R9003
 Text black R9005







CURVÈ

Corps en aluminium peint texturé blanc, gris ciment ou effet rouille.
Diffuseur en polyméthacrylate de méthyle opalin.

*Aluminium body in white textured painted, concrete grey or rust-finish.
Opal polymethylmethacrylate diffuser.*





Curvè
topLED CRI 90 | 220-240 V
12 W DC - 15 W AC



Opt	3000K	1490 lms	958 lmD
DI	1140		
DI	1141		
DI	1146		

Curvè
topLED CRI 90 | 220-240 V
24 W DC - 30 W AC



Opt	3000K	2980 lms	2211 lmD
DI	1143		
DI	1144		
DI	1147		

INDOOR

PETIT	421
QUARA	423
VISSA	425
GYPSUM	427

STEP LIGHTS








PETIT

Corps en aluminium peint texturé blanc.
White textured painted aluminium body.




Petit_R
powerLED CRI 90 | 350 mA | 1 W DC




Opt 3000K 154 lmS - 24 lmD
6° C00230WHWUS

Petit_Q
powerLED CRI 90 | 350 mA | 1 W DC




Opt 3000K 154 lmS - 24 lmD
6° C00231WHWUS

Petit_R
powerLED CRI 90 | 350 mA | 1 W DC



Opt 3000K 154 lmS - 28 lmD
6° C00232WHWUS

Petit_Q
powerLED CRI 90 | 350 mA | 1 W DC



Opt 3000K 154 lmS - 28 lmD
6° C00233WHWUS

Electronics

- 89144 ON/OFF - 1-2 art. - Ø 29
- 89145 ON/OFF - 3-6 art. - Ø 29
- 99375 ON/OFF - 6-12 art. - Ø 29
- C-E100010 0/1-10V - 3-4 art. - Ø 31
- C-E100011 DALI/PUSH - 3-4 art. - Ø 31

Recessed casings

- Petit_Q L20
- 84335 Ø20xh35
- Petit_R - Petit_Q L40
- 84915 Ø60xh49
- 84336 Ø35xh42





Corps en aluminium peint texturé blanc ou en nickel brossé.



Aluminium body painted in textured white or in brushed nickel finish.

QUARA



Quara_R



powerLED CRI 90 | 350 mA | 1 W DC



Opt | 3000K 154 lmS - 14 lmD
Asym. | **C00236WHWWW**

Quara_Q

powerLED CRI 90 | 350 mA | 1 W DC




Opt | 3000K 154 lmS - 14 lmD
Asym. | **C00237WHWWW**



Quara_R


powerLED CRI 90 | 630 mA | 2 W DC



Opt | 3000K 212 lmS - 78 lmD
Asym. | **C00238NKWWW**

Quara_Q

powerLED CRI 90 | 630 mA | 2 W DC



Opt | 3000K 212 lmS - 78 lmD
Asym. | **C00239NKWWW**

Electronics

Quara_R - Quara_Q - 1 W DC
89144 ON/OFF - 1-2 art. - Ø 29
89145 ON/OFF - 3-6 art. - Ø 29
99375 ON/OFF - 6-12 art. - Ø 29
C-E100010 0/1-10V - 3-4 art. - Ø 31
C-E100011 DALI/PUSH - 3-4 art. - Ø 31

Quara_R - Quara_Q - 2 W DC
89147 ON/OFF - 1-2 art. - Ø 29
99376 ON/OFF - 3-6 art. - Ø 29
99105 ON/OFF - 6-12 art. - Ø 64
Converter + Driver 24 V
99710 24V DC converter
0/1-10V - 1-6 art. - Ø 29
99713 24V DC converter
DALI - 1-6 art. - Ø 29
99374 Driver 24V DC - 75W - Ø 56
99331 Driver 24V DC - 150W - Ø 70

Recessed casings

Quara_R - Quara_Q - 1 W DC
98950 Ø21xh35

Quara_R - Quara_Q - 2 W DC
84338 Ø62xh72







Corps en laiton avec finition chrome ou nickel brossé.
Brass body in galvanic chrome or brushed nickel finishes.




Vissa_R
powerLED CRI 90 | 220 mA | 0,7 W DC



Opt	3000K 92 lmS - 46 lmD
91°	C00477CHWXF
91°	C00477NKWXF

Vissa_Q
powerLED CRI 90 | 220 mA | 0,7 W DC



Opt	3000K 92 lmS - 46 lmD
91°	C00478CHWXF
91°	C00478NKWXF

Electronics

99307	ON/OFF - 1-2 art. - 29
83007	ON/OFF - 3-6 art. - 29
99198	ON/OFF - 6-12 art. - 48
99361	0/1-10V - 4-12 art. - 56
83322	DALI/PUSH - 4-12 art. - 48

Recessed casings

84995	Ø31xh20
-------	---------

Accessories

84952	Washer for installation on moquette
-------	-------------------------------------







Base en plâtre peintable.
Différentes variantes esthétiques disponibles.


Paintable plaster base.
Several aesthetic variants available.

GYPSUM



Gypsum_WR3


powerLED CRI 90 | 350 mA | 1 W DC



Opt	2700K 117 lmS - 22 lmD
DI	60811M00
	3000K 126 lmS - 25 lmD
DI	60811W00

Gypsum_WRX

powerLED CRI 90 | 350 mA | 1 W DC



Opt	2700K 117 lmS - 62 lmD
DI	60910M00
	3000K 126 lmS - 67 lmD
DI	60910W00

Electronics

89144	ON/OFF - 1-2 art. - 29
89145	ON/OFF - 3-6 art. - 29
99115	0/1-10V/PUSH - 1-15 art. - 56
C-E100010	0/1-10V - 3-4 art. - 31
C-E100011	DALI/PUSH - 3-4 art. - 31

Accessories & Recessed casings

Gypsum_WR3 - Gypsum_WRX	
60830	Spacer 100x19 mm
Gypsum_WR3	
60840	Glass
Gypsum_WRX	
60837	Rec. casing 221x64xh224





Base en plâtre peintable.
Différentes variantes esthétiques disponibles.

Paintable plaster base.
Several aesthetic variants available.

GYPSUM




73 387



Gypsum_WR1


powerLED CRI 90 | 350 mA | 1 W DC



Opt	2700K 117 lmS - 48 lmD
DI	60813M00
	3000K 126 lmS - 42 lmD
DI	60813W00

Gypsum_WR2


powerLED CRI 90 | 350 mA | 1 W DC



Opt	2700K 117 lmS - 42 lmD
DI	60815M00
	3000K 126 lmS - 46 lmD
DI	60815W00

Gypsum_WRQ

powerLED CRI 90 | 350 mA | 1 W DC



Opt	2700K 117 lmS - 39 lmD
DI	60814M00
	3000K 126 lmS - 43 lmD
DI	60814W00

Electronics

89144	ON/OFF - 1-2 art. - ⌀ 29
89145	ON/OFF - 3-6 art. - ⌀ 29
99115	0/1-10V/PUSH - 1-15 art. - ⌀ 56
C-E100010	0/1-10V - 3-4 art. - ⌀ 31
C-E100011	DALI/PUSH - 3-4 art. - ⌀ 31


Accessories & Recessed casings

Gypsum_WR1 - Gypsum_WR2 - Gypsum_WRQ
60830 Spacer 100x19 mm


Gypsum_WR1
60836 Rec. casing 198x81xh172

Gypsum_WR2
60838 Rec. casing 202x71xh254

Gypsum_WRQ
60837 Rec. casing 221x64xh224



Gypsum_WF1
powerLED CRI 90 | 350 mA | 1 W DC



Opt	2700K 117 lmS - 27 lmD
109°	60920M70
	3000K 126 lmS - 30 lmD
109°	60920W70




Base en plâtre peintable.
Différentes variantes esthétiques disponibles.

Paintable plaster base.
Several aesthetic variants available.


GYPSUM



73 387

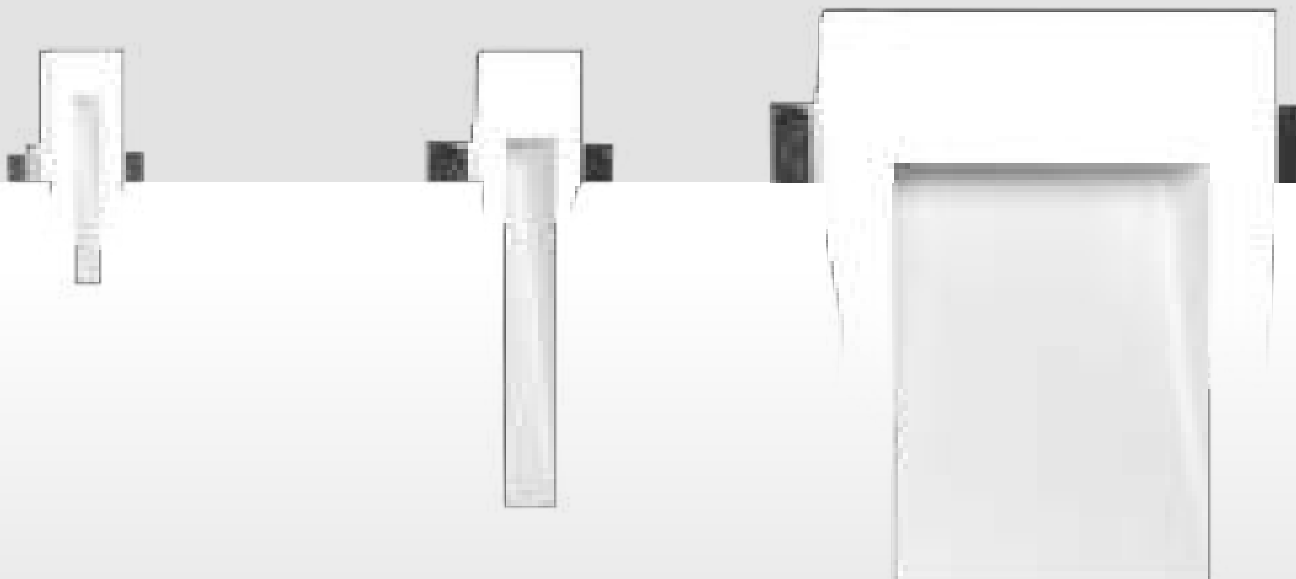**Gypsum_WF2**


powerLED CRI 90 | 350 mA | 1 W DC

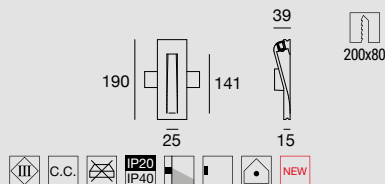


Opt	2700K 117 lmS - 40 lmD
DI	60930M70
	3000K 126 lmS - 43 lmD
DI	60930W70

Gypsum_WF3

powerLED CRI 90 | 350 mA | 1 W DC

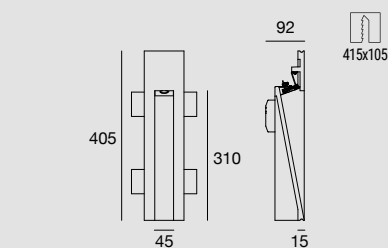

Opt	2700K 155 lmS - 60 lmD
DI	60680M70
	3000K 166 lmS - 65 lmD
DI	60680W70

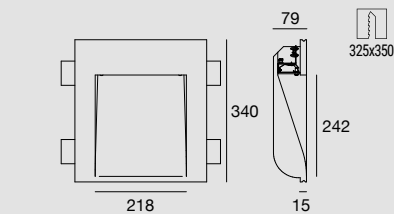Gypsum_WF4powerLED CRI 90 | 220-240 V
6 W DC - 8 W AC

Opt	2700K 666 lmS - 283 lmD
DI	61390M00
	3000K 717 lmS - 304 lmD
DI	61390W00

Electronics

Gypsum_WF1 - Gypsum_WF2 - Gypsum_WF3

89144	ON/OFF - 1-2 art. - Ⓢ 29
89145	ON/OFF - 3-6 art. - Ⓢ 29
99115	0/1-10V/PUSH - 1-15 art. - Ⓢ 56
C-E100010	0/1-10V - 3-4 art. - Ⓢ 31
C-E100011	DALI/PUSH - 3-4 art. - Ⓢ 31

Accessories & Recessed casings

Gypsum_WF1 - WF2 - WF3 - WF4

60830	Spacer (kit - 4 pieces)
--------------	-------------------------

Gypsum_WF1

61270	Rec. casing 140x51xh172-232
--------------	-----------------------------

Gypsum_WF2

61280	Rec. casing 140x51xh172-232
--------------	-----------------------------

Gypsum_WF3

64180	Rec. casing 165x76x437
--------------	------------------------


Gypsum_WF4

61290	Rec. casing 390x84x462
--------------	------------------------

INDOOR

BIBOK	435
ASPHO	437
NITUM	439
PICROL	443
GHILEA	445
ELIN	447
EYELET	449

MICRO SPOTLIGHTS







BIBOK

Corps en laiton peint en blanc texturé ou avec finition galvanique chrome.
Brass body in white textured painted finish or in galvanic chrome.



Bibok


5mmLED CRI 80 | 24 V DC | 0,5 W DC



Opt	3000K 42 lmS - 6 lmD
45°	91366W30
45°	85335W30
Opt	5000K 58 lmS - 8 lmD
45°	91366C30
45°	85335C30

Bibok

powerLED CRI 90 | 350 mA | 1 W DC



Opt	3000K 132 lmS - 39 lmD
32°	C00259WHWMW
32°	C00259CHWMW

Electronics

Bibok - 0,5 W DC	
89408	ON/OFF - 1-10 art. - 29
99374	ON/OFF - 1-135 art. - 56
99332	0/1-10V - 1-270 art. - 70
83333	DALI/PUSH - 1-270 art. - 77
99722	DALI - 1-220 art. - 73

Bibok - 1 W DC	
89144	ON/OFF - 1-2 art. - 29
89145	ON/OFF - 3-6 art. - 29
99375	ON/OFF - 6-12 art. - 29
C-E100010	0/1-10V - 3-4 art. - 31
C-E100011	DALI/PUSH - 3-4 art. - 31

Recessed casings

Bibok 1W	
84916	Ø60xh48





ASPHO

Corps en laiton peint en blanc texturé ou avec finitions chrome ou nickel brossé.

Brass body in white textured painted finish, chrome or brushed nickel.



Aspho_R

5mmLED CRI 80 | 24 V DC | 0,5 W DC




Opt	3000K 45 lmS - 6 lmD
45°	88417W30
45°	85001W30
45°	85002W30

Opt	5000K 58 lmS - 8 lmD
45°	88417C30

Aspho_R

powerLED CRI 90 | 350 mA | 1 W DC



Opt	2700K 145 lmS - 37 lmD
32°	C00263WHMMW

Opt	3000K 154 lmS - 40 lmD
32°	C00263WHMMW
32°	C00263CHMMW
32°	C00263NKMMW

Opt	4000K 165 lmS - 44 lmD
32°	C00263WHNMW
32°	C00263CHNMW
32°	C00263NKNMW

Electronics

Aspho_R - 0,5 W DC

89408	ON/OFF - 1-10 art. - Ø 29
99374	ON/OFF - 1-135 art. - Ø 56
99332	0/1-10V - 1-270 art. - Ø 70
83333	DALI/PUSH - 1-270 art. - Ø 77
99722	DALI - 1-220 art. - Ø 73

Aspho_R - 1 W DC

89144	ON/OFF - 1-2 art. - Ø 29
89145	ON/OFF - 3-6 art. - Ø 29
99375	ON/OFF - 6-12 art. - Ø 29
C-E100010	0/1-10V - 3-4 art. - Ø 31
C-E100011	DALI/PUSH - 3-4 art. - Ø 31

Aspho_R - 1,5 W DC

99195	ON/OFF - 1-2 art. - Ø 29
89146	ON/OFF - 2-3 art. - Ø 29
99377	ON/OFF - 3-6 art. - Ø 64
C-E100004	0/1-10V - 3-4 art. - Ø 31
C-E100005	DALI/PUSH - 3-4 art. - Ø 31

Aspho_R - RGB - 1,5 W DC

Dimmer RF + RF remote 1-140 art. - Ø 53	
C-E700002 + C-W600001	
99331	CV 24V 150W - Ø 70

C-E700005	Dimmer DMX - 1-140 art. - Ø 60
DMX	Controllers pag. XXIX
99331	CV 24V 150W - Ø 70

Recessed casings

Aspho_R 0,5W / 1W

84916	Ø60xh48
84335	Ø20xh35

Aspho_R 1,5W


84917	Ø60xh80
--------------	---------

Aspho_R 1,5W RGB

84916	Ø60xh48
--------------	---------

Aspho_R



5mmLED CRI 80 | 24 V DC | 1,5 W DC



Opt	RGB
45°	91352Z30
45°	86708Z30

Aspho_R

powerLED CRI 90 | 500 mA | 1,5 W DC



Opt	3000K 213 lmS - 54 lmD
32°	C00264WHMMW

Finishes

Text white R9003

Brushed nickel

Polished (galvanic) chrome





Corps en laiton peint en blanc texturé ou avec finitions chrome ou nickel brossé.


Brass body in white textured painted finish, chrome or brushed nickel.

NITUM



Nitum_R



powerLED CRI 90 | 350 mA | 1 W DC



Opt	3000K 154 lmS - 112 lmD
47°	C00269WHWMW
47°	C00269CHWMW
47°	C00269NKWMW

Nitum_R



powerLED CRI 90 | 630 mA | 2 W DC



Opt	3000K 212 lmS - 180 lmD
35°	C00273WHWML
47°	C00273WHWMW
47°	C00273CHWMW
47°	C00273NKWMW
68°	C00273WHWWF
68°	C00273CHWWF
68°	C00273NKWWF
115°	C00273WHWXF
Opt	4000K 237 lmS - 202 lmD
47°	C00273WHNMMW

Nitum_R

powerLED | 220 mA | 2,1 W DC



Opt	RGB
27°	88568Z30
50°	88568Z60
50°	86612Z60

Electronics

Nitum_R - 1 W DC

89144	ON/OFF - 1-2 art. - 29
89145	ON/OFF - 3-6 art. - 29
99375	ON/OFF - 6-12 art. - 29
C-E100010	0/1-10V - 3-4 art. - 31
C-E100011	DALI/PUSH - 3-4 art. - 31

Nitum_R - 2 W DC

89147	ON/OFF - 1-2 art. - 29
99376	ON/OFF - 3-6 art. - 29
99105	ON/OFF - 6-12 art. - 64
Converter + Driver 24 V	
99710	24V DC converter 0/1-10V 1-6 art. - 29
99713	24V DC converter DALI - 1-6 art. - 29
99374	Driver 24V DC - 75W - 56
99331	Driver 24V DC - 150W - 70

Nitum_R - RGB - 2,1 W DC

Dimmer RF + RF remote 6-12 art. - 52	
C-E700003 + C-W600001	
C-E500015	Dimmer DMX - 6-12 art.
DMX	Controllers pag. XXIX
Driver CV	CV 48V pag. XVIII
Switching	CV 48V pag. XII-XIII

Recessed casings

Nitum_R - 1 W

84915	Ø60xh49
84336	Ø35xh42
Nitum_R - 2 W - 2,1 W	
84901	Ø60xh69

Cables for Nitum_R RGB 2,1 W

page XXXIII

Finishes Text white R9003 Brushed nickel
 Polished (galvanic) chrome






NITUM

Corps en laiton peint en blanc texturé.
Brass body in white textured painted finish.




Nitum_Q
powerLED CRI 90 | 350 mA | 1 W DC



Opt 3000K 154 lmS - 112 lmD
47° **C00275WHWMW**

Nitum_Q
powerLED CRI 90 | 630 mA | 2 W DC



Opt 3000K 213 lmS - 180 lmD
47° **C00276WHWMW**

Electronics

Nitum_Q - 1 W DC
89144 ON/OFF - 1-2 art. - Ø 29
89145 ON/OFF - 3-6 art. - Ø 29
99375 ON/OFF - 6-12 art. - Ø 29
C-E100010 0/1-10V - 3-4 art. - Ø 31
C-E100011 DALI/PUSH - 3-4 art. - Ø 31

Nitum_Q - 2 W DC
89147 ON/OFF - 1-2 art. - Ø 29
99376 ON/OFF - 3-6 art. - Ø 29
99105 ON/OFF - 6-12 art. - Ø 64
Converter + Driver 24 V
99710 24V DC converter
0/1-10V 1-6 art. - Ø 29
99713 24V DC converter
DALI - 1-6 art. - Ø 29
99374 Driver 24V DC - 75W - Ø 56
99331 Driver 24V DC - 150W - Ø 70

Recessed casings


Nitum_Q - 1 W
84915 Ø60xh49
84336 Ø60xh42
Nitum_Q - 2 W
84901 Ø60xh69



Corps en polyamide blanc ou noir.
White or black polyamide body.



Picrol
powerLED CRI 90 | 350 mA | 1 W DC



Opt	3000K - 154 lmS - 96 lmD
45°	C00278WHWMW
45°	C00278BBWMW
61°	C00278WHWWF
61°	C00278BBWWF

Electronics

89144	ON/OFF - 1-2 art. - 29
89145	ON/OFF - 3-6 art. - 29
99375	ON/OFF - 6-12 art. - 29
C-E100010	0/1-10V - 3-4 art. - 31
C-E100011	DALI/PUSH - 3-4 art. - 31

Recessed casings


98049	Ø29xh52
-------	---------



Corps en aluminium peint en blanc ou noir avec finition texturée.
White or black textured painted aluminium body.



Ghilea
powerLED CRI 90 | 630 mA | 2 W DC



Opt	3000K 213 lmS - 141 lmD
32°	C00282WHWML
32°	C00282BBWML

Electronics

89147	ON/OFF - 1-2 art. - 29
99376	ON/OFF - 3-6 art. - 29
99105	ON/OFF - 6-12 art. - 64
Converter + Driver 24 V	
99710	24V DC converter 0/1-10V 1-6 art. - 29
99713	24V DC converter DALI - 1-6 art. - 29
99374	Driver 24V DC - 75W - 56
99331	Driver 24V DC - 150W - 70


Recessed casings

84902	Ø50xh62
-------	---------





Corps en laiton. Diffuseur en cristal taillé transparent à structure prismatique.
Brass body. Transparent prismatic ground crystal diffuser.



Elin
5mmLED | 24 V DC | 0,5 W DC



Opt | RGB
DI | **87340Z00**

Electronics

Elin - 0,5 W DC
Dimmer RF + RF remote 1-140 art. - Ø 53
C-E700002 + C-W600001
99331 CV 24V 150W - Ø 70

C-E700005 Dimmer DMX - 1-140 art. - Ø 60
DMX Controllers pag. XVIII
99331 CV 24V 150W - Ø 70

Recessed casings

Elin - 0,5 W DC
84335 Ø20xh35
84916 Ø60xh48






EYELET

Corps en aluminium peint en blanc ou noir avec finition texturée.
White or black textured painted aluminium body.




Eyelet_R
powerLED CRI 90
630 mA - 2 W DC | 1000 mA - 3 W DC



Opt	2W - 3000K 212 lmS - 170 lmD
	3W - 3000K 402 lmS - 322 lmD
24°	C01045WHWFL
24°	C01045BBWFL

Eyelet_Q
powerLED CRI 90
630 mA - 2 W DC | 1000 mA - 3 W DC



Opt	2W - 3000K 212 lmS - 170 lmD
	3W - 3000K 402 lmS - 322 lmD
24°	C01046WHWFL
24°	C01046BBWFL


Electronics

Eyelet_R 2 W - Eyelet_Q 2 W	
89147	ON/OFF - 1-2 art. - 29
99376	ON/OFF - 3-6 art. - 29
99105	ON/OFF - 6-12 art. - 64
Converter + Driver 24 V	
99710	24V DC converter
	0/1-10V 1-6 art. - 29
99713	24V DC converter
	DALI - 1-6 art. - 29
99374	Driver 24V DC - 75W - 56
99331	Driver 24V DC - 150W - 70

Eyelet_R 3 W - Eyelet_Q 3 W	
C-E100046	ON/OFF - 1-6 art. - 48
C-E100033	ON/OFF - 4-12 art. - 50
C-E100047	DALI - 1-3 art. - 40
C-E100034	DALI/PUSH - 4-12 art. - 50

INDOOR

HALFPIPE	453
POE	455
JOSHUA	457
OH!	459
OH! SMASH	461
ANTIGUA	463
DELFI	465



FLOOR





Corps en aluminium brillant ou peint texturé blanc ou noir.
Diffuseur en polycarbonate opalin. Base en métal peint texturé blanc ou noir.


*Body in polished aluminium or white or black textured painted aluminium.
Opal polycarbonate diffuser. Base in white or black textured painted metal.*

HALFPIPE



241 397

Halfpipe_FL | V2
topLED CRI 90 | 220-240 V
32 W DC - 35 W AC



3,5m

Opt | 3000K 3590 lmS - 1773 lmD


DI 9815
DI 9816
DI 9817

Finishes Text white R9003 Polished aluminium
 Text black R9005





POE



265 413


Corps en métal peint texturé blanc, noir ou gris, ou en finition terracotta. Diffuseur en polycarbonate opalin.

Body in white, black or grey textured painted metal, or in terracotta finish. Opal polycarbonate diffuser.



Poe_FL

topLED CRI 90 | 220-240 V
22 W DC - 25 W AC



Opt	3000K	2718 lmS - 2375 lmD
 DI	8345	
 DI	8346	
 DI	8348	
 DI	8349	

Finishes  Text white R9003  Text basalt grey R7012
 Text black R9005 Text terracotta





JOSHUA




Corps en aluminium peint texturé blanc ou noir.
Diffuseur en polyméthacrylate de méthyle opalin.

*Body in white or black textured painted aluminium.
Diffuser in opal polymethylmethacrylate.*



Joshua

topLED CRI 80 | 220-240 V
20 W DC - 25 W AC




Opt	3000K 2687 lmS - 2375 lmD
DI	8365
DI	8366

Finishes Text white R9003
 Text black R9005






OH!



Diffuseur en polyéthylène.
Base en polycarbonate blanc.

*Polyethylene diffuser.
White polycarbonate base.*

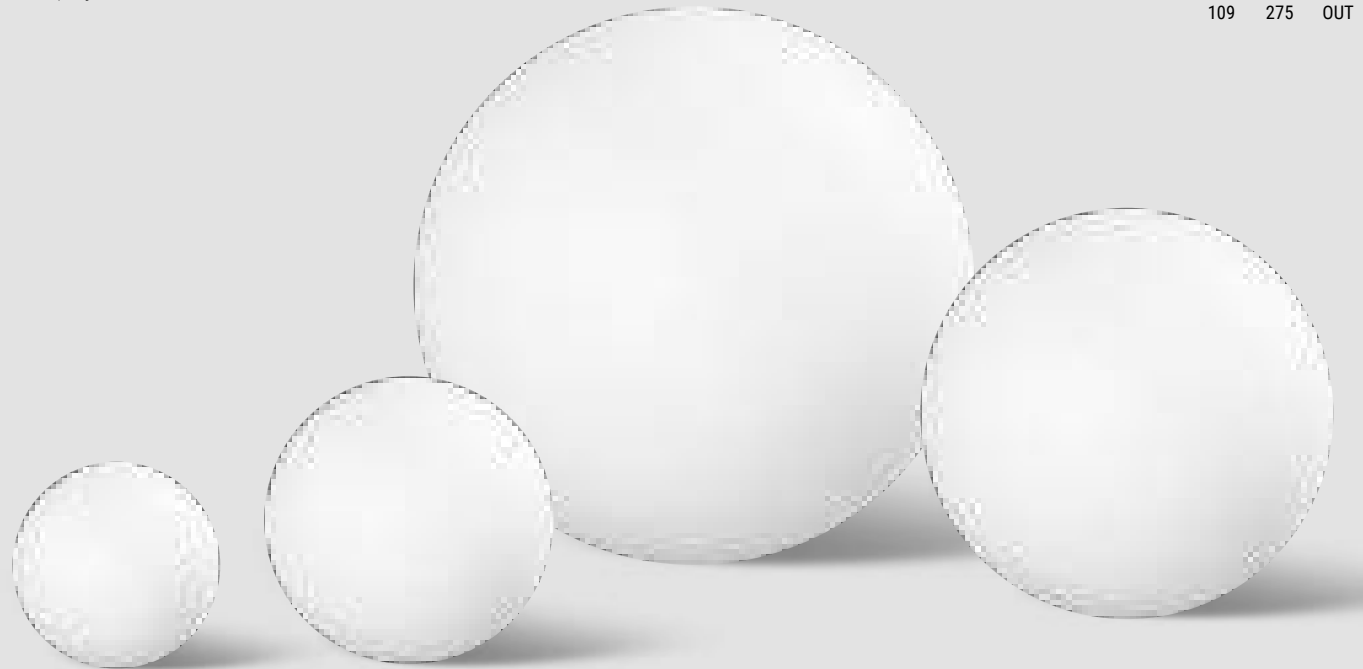


Oh!_FL E27
220-240 V





E27 1 x 30 W Max Halogen
(LED bulbs compatible)
12100

Oh!_FL E27
220-240 V




E27 1 x 46 W Max Halogen
(LED bulbs compatible)
12102

Oh!_FL E27
220-240 V



E27 1 x 46 W Max Halogen
(LED bulbs compatible)
12104

Oh!_FL E27
220-240 V



E27 1 x 57 W Max Halogen
(LED bulbs compatible)
12106









Diffuseur en polyéthylène.
Base en polycarbonate blanc.

*Polyethylene diffuser.
White polycarbonate base.*

OH! SMASH

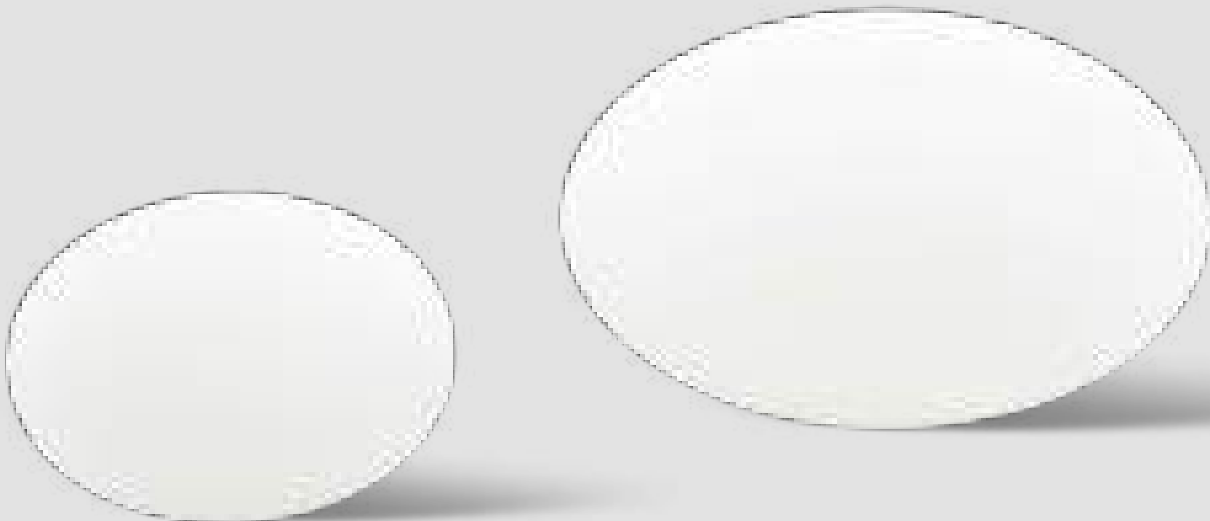


Oh! Smash_FL E27
220-240 V



E27 1 x 30 W Max Halogen
(LED bulbs compatible)
12215

Oh! Smash_FL E27
220-240 V



E27 1 x 46 W Max Halogen
(LED bulbs compatible)
12218






Diffuseur en verre transparent avec bord sablé.
Élément central, tige et base en métal peint blanc ou noir effet gaufré.

*Diffuser in clear glass with sandblasted edge.
Central element, stem and base in white or black textured painted metal.*

ANTIGUA



283 351



Antigua_FL
topLED CRI 90 | 220-240 V
32 W DC - 39 W AC



Opt | 3000K 2796 lmS - 2000 lmD
 □ DI | **9315**
 ■ DI | **9316**

Finishes □ Text white R9003
 ■ Text black R9005





DELFI




123 307

Abat-jour en métal peint extérieurement dans les couleurs blanc, noir, peach, pétrole et deep blue, avec finition texturée. Intérieur peint en blanc. La tige et la base en métal peint reprennent la couleur de l'abat-jour.

Metal lampshade externally painted in white, black, peach, petrol and deep blue, with textured finish. White painted interior. The painted metal stem and base match the colour of the lampshade.

**Delfi_FL**

topLED CRI 90 | 220-240 V
28 W DC - 31 W AC



Opt	2700K 3441 lmS - 2175 lmD
DI	CA057FWHMDD
DI	CA057FBBMDD
DI	CA057FBEMDD
DI	CA057FGBMDD
DI	CA057FLUMDD
Opt	3000K 3622 lmS - 2289 lmD
DI	CA057FWHWDD
DI	CA057FBBWDD
DI	CA057FBEWDD
DI	CA057FGBWDD
DI	CA057FLUWDD

Finishes Text white R9003 Text peach R3012 Text deep blue R5011
 Text black R9005 Text petrol R6004

INDOOR

CAMPING	469
DAMA	471
DUBCOLOR	473
GEMINI	475
SINFONIA	477



TABLE





Lampe rechargeable en aluminium peint texturé blanc, noir ou brun foncé. Diffuseur en polyméthacrylate de méthyle transparent. Câble USB-C avec transformateur inclus.


Rechargeable lamp in white, black or dark brown textured painted aluminium. Diffuser in clear polymethylmethacrylate. USB-C cable + charger included.

CAMPING




Camping

topLED CRI 90 | 2,5 W DC 5 V



Opt 1700/4000K
200/370 lmS - 99/140 lmD
DI 9650
DI 9651
DI 9652



1700 K

4000 K

Press and hold



Tap <1 sec = 25%
20 h



Tap <1 sec = 50%
10 h



Tap <1 sec = 100%
6 h

Finishes Text white R9003 Dark brown
 Text black R9005





DAMA




Lampe rechargeable en métal peint texturé blanc, noir, brun foncé, rouge rubis, bleu azur, vert pastel. Câble Micro USB inclus.

Rechargeable lamp in white, black, dark brown, rubin red, azure or pastel green textured painted metal. Micro USB cable included.



Dama
topLED CRI 80 | 1,8 W DC 5 V



Opt	3000K	110 lmS	94 lmD
DI	9345		
DI	9346		
DI	9347		
DI	9349		
DI	9350		
DI	9351		

Finishes	Text white R9003	Dark brown	Text dusty blue R5024
	Text black R9005	Text rubin R3003	Text pastel green R6019





DUBCOLOR





Lampe rechargeable en métal peint texturé blanc, noir, brun foncé, rouge rubis, bleu azur, vert pastel. Diffuseur en polyméthacrylate de méthyle opalin. Câble USB-C avec transformateur inclus.



Rechargeable lamp in white, black, dark brown, rubin red, azure or pastel green textured painted metal. Polymethylmethacrylate diffuser. USB-C cable + charger included.



Dubcolor
topLED CRI 90 | 2,5 W DC 5 V



Opt	1700/4000K
	200/370 lmS - 165/207 lmD
DI	9595
DI	9596
DI	9597
DI	9598
DI	9599
DI	9600

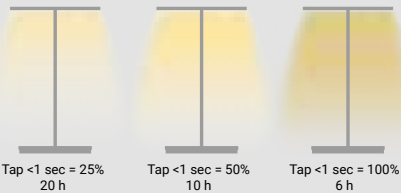


Finishes	Text white R9003	Dark brown	Text dusty blue R5024
	Text black R9005	Text rubin R3003	Text pastel green R6019





GEMINI




113 403

Tête en grès dans les finitions statuarietto ou noir grec.
Diffuseur en polyméthacrylate de méthyle satiné.
Tige et base en métal peint texturé blanc.

*Stoneware head in statuarietto or nero greco finishes.
Satin-finish polymethylmethacrylate diffuser.
Stem and base in white textured painted metal.*



Gemini_TAB
topLED CRI 90 | 220-240 V
8 W DC - 9 W AC



Opt	2700K 839 lmS - 590 lmD
DI	9678M
DI	9679M
Opt	3000K 912 lmS - 641 lmD
DI	9678
DI	9679





SINFONIA




105 206 261

Corps en aluminium peint texturé blanc ou noir, ou dans les finitions galvanisées chrome et or brossé. Diffuseur en polyméthacrylate de méthyle.

Body in white or black textured painted aluminium, or in the galvanic chrome and brushed gold finishes. Diffuser in polymethylmethacrylate.



Rossini_TAB | V2
topLED CRI 90 | 220-240 V
5 W DC - 7 W AC




Opt	2700K 640 lmS - 608 lmD
DI	CA148FWHMDI
DI	CA148FBBMDI
DI	CA148FCHMDI
DI	CA148FHGMDI

Opt	3000K 679 lmS - 645 lmD
DI	CA148FWHWDI
DI	CA148FBBWDI
DI	CA148FCHWDI
DI	CA148FHGWDI

Finishes Text white R9003 Polished (galvanic) chrome
 Text black R9005 Brushed gold


OUTDOOR

ORMA	481
PORTIK	483
FYLO+ OUT	485
LIRA	487
OH!	491
OH! SMASH	493
VISION	495



CEILING






Corps en aluminium.
Bride en acier inox AISI 316L.

*Aluminium body.
AISI 316L stainless steel flange.*




Orma_C
powerLED | 350 mA | 4 W DC



Opt | 3000K 490 lmS - 270 lmD
■ 29° | **81223W30**
■ 49° | **81223W60**

Orma_C
arrayLED | 220 mA | 8 W DC



Opt | 3000K 1182 lmS - 943 lmD
■ 32° | **81229W30**
■ 61° | **81229W60**

Orma_C
arrayLED-Direct | 220-240 V AC | 7 W AC



Opt | 3000K 865 lmS - 560 lmD
■ 33° | **76180W30**

Electronics

Orma_C 4W
89421 ON/OFF - 1 art.
C-E200006 ON/OFF - 2-3 art. - Ø 35
C-E200004 DALI/PUSH - 2-3 art. - Ø 55

Orma_C 8W
99342 ON/OFF - 1 art.
C-E200005 DALI/PUSH - 1 art. - Ø 55

Recessed casings

89373 For brickwork - 213x138xh125
89374 For brickwork with power supply housing - 370xh120







PORTIK

Corps en aluminium peint texturé blanc ou noir.
Diffuseur en verre trempé transparent.

*White or black textured painted aluminium body.
Transparent tempered glass diffuser.*

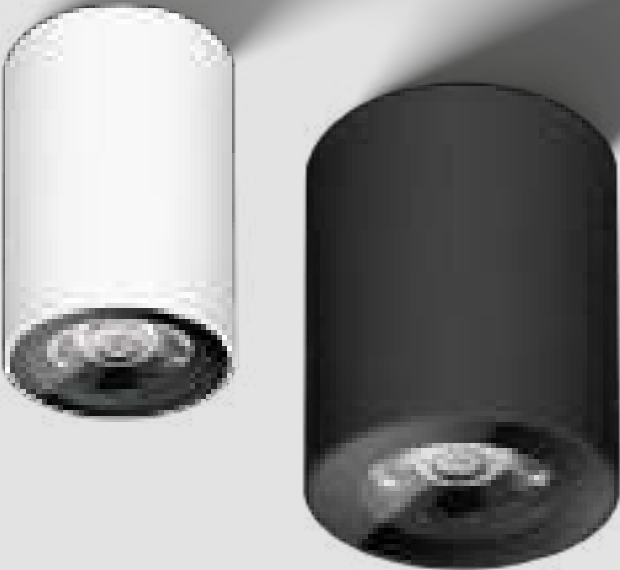


Portik_R | V2
arrayLED | 220-240 V AC
6,5 W DC - 7,5 W AC



Opt	3000K 965 lmS - 692 lmD
50°	C00467WHWWF
50°	C00467BBWWF

Portik_R | V2
arrayLED | 220-240 V AC
14 W DC - 15,8 W AC



Opt	3000K 2371 lmS - 1612 lmD
51°	C00471WHWWF
51°	C00471BBWWF

Finishes Text white R9003
 Text black R9005







Profilé en aluminium prétraité avec revêtement en résine de poudre de quartz et matériau de construction mélangé.

Pre-treated aluminium profile with cover in quartz powder resin and mixed building material.

FYLO+ OUT

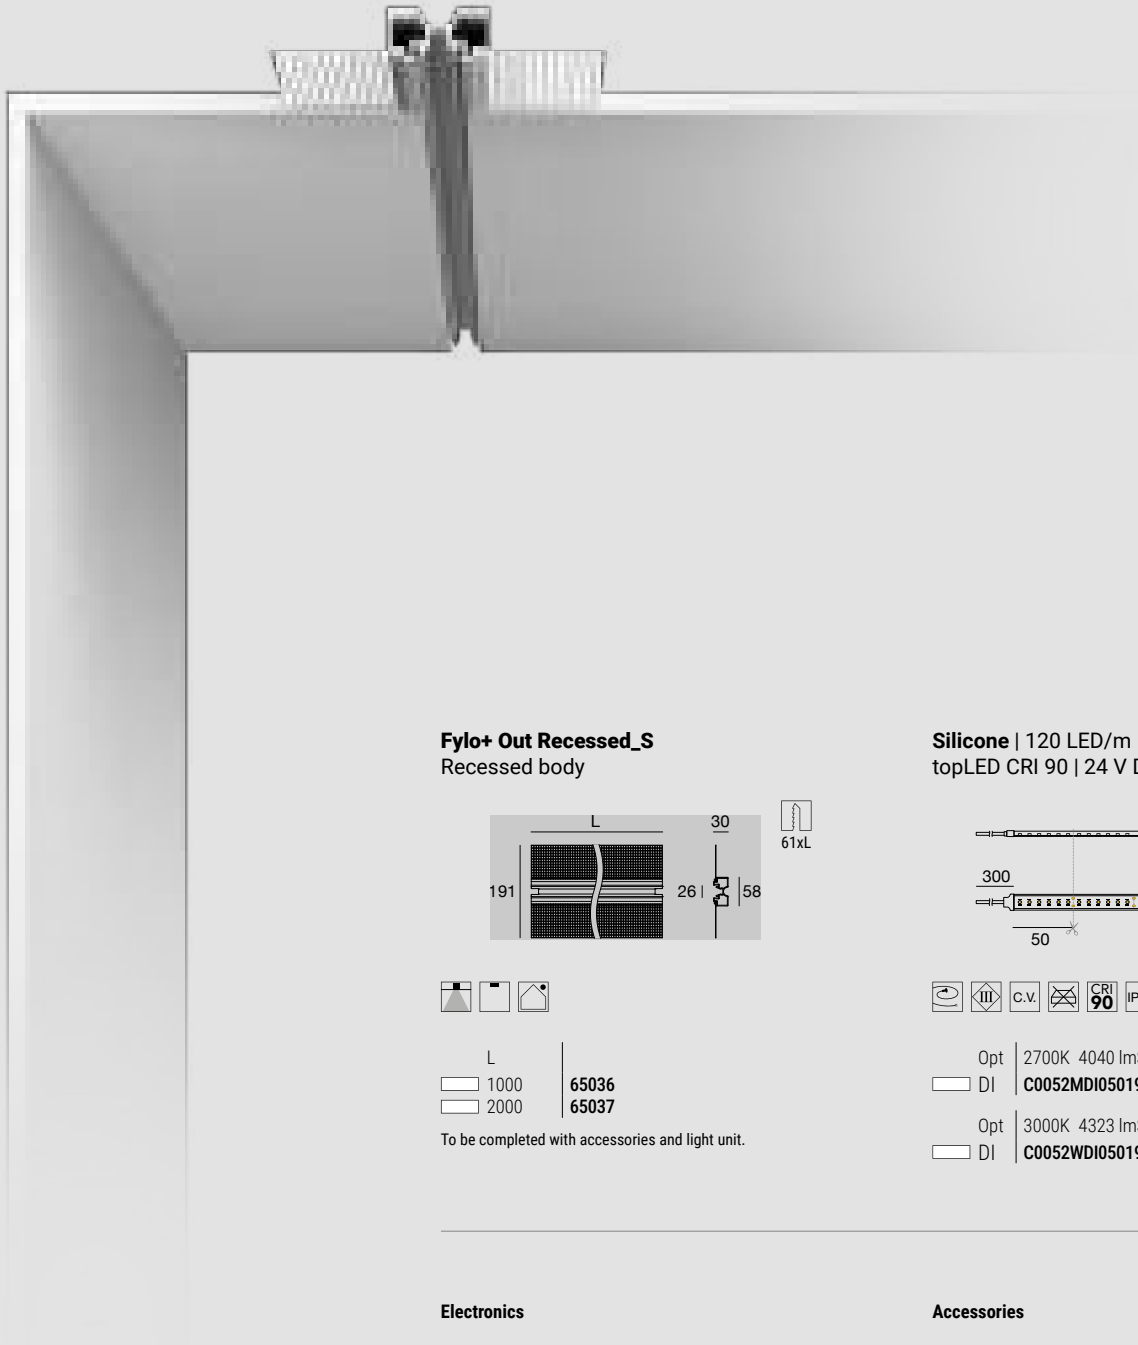



Fylo+ Out Recessed_S
Recessed body



L		
	1000	65036
	2000	65037

To be completed with accessories and light unit.

Silicone | 120 LED/m
topLED CRI 90 | 24 V DC | 9,6 W/m



Opt	2700K 4040 lmS - 4040 lmD
☐ DI	C0052MDI05019
Opt	3000K 4323 lmS - 4323 lmD
☐ DI	C0052WDI05019

Electronics

Silicone 9,6 W/m

99374 ON/OFF - 75W -  56
99331 ON/OFF - 150W -  70
99332 0/1-10V - 150W -  70
83333 DALI/PUSH - 150W -  77
C-E400002 DALI/PUSH - 240W -  77


Accessories

62757	1 m opaline diffuser
62758	2 m opaline diffuser
65026	2x sealing caps
65035	Template - 1000x63xh32





LIRA




Corps et montage en métal peint texturé noir ou brun foncé.
Diffuseur en résine polyuréthane blanche.

Body and fixture in textured painted black or dark brown metal.
Diffuser in white polyurethane resin.

**Lira_SR**

topLED CRI 80 | 220-240 V
24 W DC - 29 W AC




Opt	3000K 3924 lmS - 1402 lmD
DI	9324
DI	9325

Finishes  Dark brown
 Text black R9005






LIRA




Corps et montage en acier inox AISI 304 peint texturé noir ou brun foncé.
Diffuseur en résine polyuréthane blanche.

*Body and fixture in AISI 304 stainless steel painted in textured black or dark brown.
Diffuser in white polyurethane resin.*

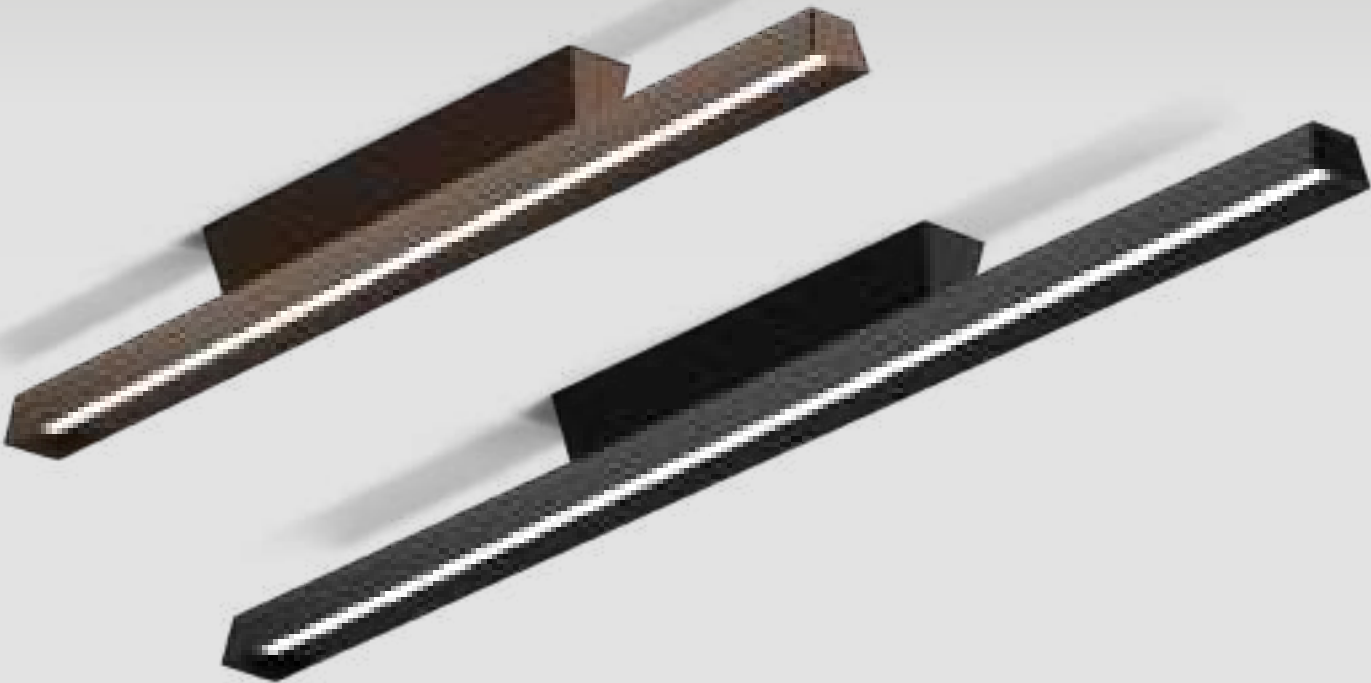


Lira_SB
topLED CRI 80 | 220-240 V
19 W DC - 21 W AC



Opt	3000K	2952 lms - 1001 lmD
DI	9334	
DI	9335	

Lira_SB
topLED CRI 80 | 220-240 V
27 W DC - 31 W AC



Opt	3000K	4136 lms - 1352 lmD
DI	9336	
DI	9337	


Finishes

- Dark brown
- Text black R9005






OH!



Diffuseur en polyéthylène.
Montage en polycarbonate blanc.

*Polyethylene diffuser.
White polycarbonate fixture.*

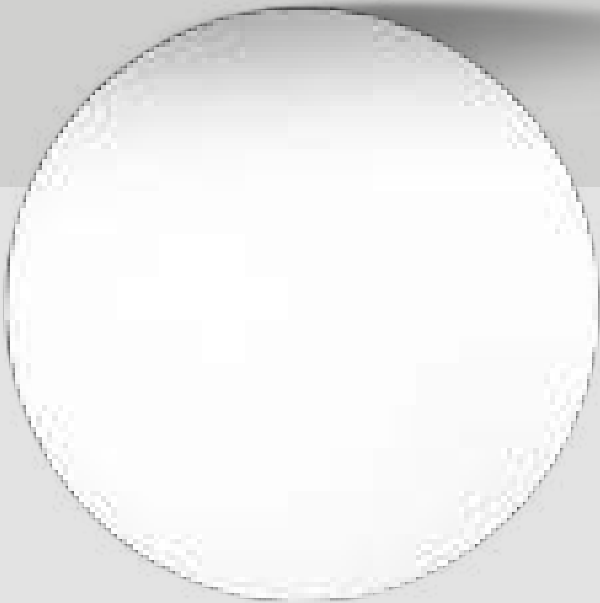

Oh!_S65 LED
topLED CRI 90 | 350 mA | 7 W DC




Opt | 3000K 1022 lmS - 845 lmD
DI | **16112**

Oh!_S65 E27
220-240 V



E27 1 x 30 W Max Halogen
(LED/FLUORESCENT bulbs
compatible)
16181

Oh!_S65 LED
topLED CRI 90 | 220-240 V
13 W DC - 15 W AC




Opt | 3000K 1930 lmS - 1584 lmD
DI | **16105**

Oh!_S65 E27
220-240 V



E27 1 x 46 W Max Halogen
(LED/FLUORESCENT bulbs
compatible)
16183

Oh!_S65 LED
topLED CRI 90 | 220-240 V
18 W DC - 20 W AC



Opt | 3000K 2748 lmS - 2115 lmD
DI | **16109**

Oh!_S65 E27
220-240 V



E27 1 x 46 W Max Halogen
(LED/FLUORESCENT bulbs
compatible)
16185






Diffuseur en polyéthylène.
Montage en polycarbonate blanc.

*Polyethylene diffuser.
White polycarbonate fixture.*

OH! SMASH




Oh! Smash_S E27
220-240 V



E27 1 x 30 W Max Halogen
(LED/FLUORESCENT bulbs
compatible)
16214

Oh! Smash_S E27
220-240 V



E27 1 x 46 W Max Halogen
(LED/FLUORESCENT bulbs
compatible)
16217





VISION




509

Corps en aluminium peint texturé gris ou brun foncé.
Grey or dark brown textured painted aluminium body.



Vision_WJ
220-240 V



GU10 1 x 50 W Max Halogen
(LED bulbs compatible)



51365
51366


Accessories

50370 Peg (ground install.) L 204 mm

Finishes Text brilliant grey R9006
 Dark brown

OUTDOOR

EYELET65	499
PERISKOP	501
SHAKER	503
IRIS67	505
PROLAMP	507
VISION	509
CLIVO	511



PROJECTORS





EYELET65




Corps en aluminium peint texturé blanc, noir ou vert. Diffuseur en verre transparent extra-clair.

White, black or green textured painted aluminium body. Extra-clear glass diffuser.

**Eyelet65_R | V2**

powerLED |

630 mA - 2 W DC | 1000 mA - 3 W DC



Opt | 2W - 2700K 219 lmS - 151 lmD
3W - 2700K 417 lmS - 322 lmD

■ 24° C01047BBMFL
■ 31° C01047BBMML
■ 54° C01047BBMWF

Opt | 2W - 3000K 233 lmS - 171 lmD
3W - 3000K 432 lmS - 335 lmD

□ 24° C01047WHWFL
■ 24° C01047BBWFL
■ 24° C01047GRWFL
□ 31° C01047WHWML
■ 31° C01047BBWML
■ 31° C01047GRWML
■ 54° C01047BBWWF

Electronics

Eyelet65_R - IP67 - 2W

89420 ON/OFF - 1-2 art.

C-E200008 ON/OFF - 3-6 art. - Ø 35

99186 ON/OFF - 6-12 art.

C-E200002 DALI/PUSH - 5-12 art. - Ø 55

Eyelet65_R - IP67 - 3W

C-E200011 ON/OFF - 1-4 art. - Ø 44

C-E200012 DALI - 4-15 art. - Ø 86

Accessories

98669 Steel peg L 101 mm

83359 Cylindrical antiglare screen

98624 Steel peg Ø10x160 mm

C-F500002 Steel peg Ø10x700 mm

C-F500003 Steel peg Ø10x1000 mm

Finishes □ Text white R9003 ■ Text green R6031
■ Text black R9005





Corps en aluminium peint texturé noir ou brun foncé.
Diffuseur en verre trempé extra-clair.


*Black or dark brown textured painted aluminium body.
Extra-clear tempered glass diffuser.*

PERISKOP



Periskop45

powerLED | 500 mA | 6 W DC





Opt	2700K 659 lmS - 396 lmD
28°	90520M30
28°	90522M30
50°	90520M60
50°	90522M60

Opt	3000K 659 lmS - 396 lmD
28°	90520W30
28°	90522W30
50°	90520W60
50°	90522W60

Periskop45 RGB


powerLED | 500 mA | 4,5 W DC



Opt	RGB
50°	95126Z60
50°	95330Z60

Periskop80 | V2

arrayLED | 220-240 V
9,5 W DC - 11,5 W AC



Opt	3000K 1320 lmS - 1000 lmD
38°	C00487BBWML
38°	C00487DBWML
50°	C00487BBWWF
50°	C00487DBWWF

Electronics

Periskop45

C-E200007 ON/OFF - 1 art. - Ⓢ 35

99185 ON/OFF - 2-3 art.

C-E200003 DALI/PUSH - 2-3 art. - Ⓢ 55

Periskop45 RGB

Dimmer RF + RF remote 6-12 art. - Ⓢ 52

C-E700003 + C-W600001

C-E500015 Dimmer DMX - 6-12 art.

DMX Controllers pag. XXIX

Driver CV CV 48V pag. XVIII

Switching CV 48V pag. XII-XIII

Accessories

Periskop45 - Periskop45 RGB

98550 Peg L 152 mm

98624 Steel peg Ø10x160 mm

C-F500002 Steel peg Ø10x700 mm

C-F500003 Steel peg Ø10x1000 mm

Periskop80

99802 Tree belt

98549 Peg L 204 mm

C-U300023 Anti-glare screen

C-U300026 Anti-glare pipe



Tree belt



Anti-glare screen



Anti-glare pipe

Finishes	Text black R9005
	Dark brown





Corps en aluminium peint texturé noir, vert ou brun foncé.
Diffuseur en verre trempé extra-clair.



*Black, green or dark brown textured painted aluminium body.
Extra-clear tempered glass diffuser.*

SHAKER



Shaker
powerLED | 220-240 V
2 W DC - 3 W AC

Shaker
arrayLED | 220-240 V
6,3 W DC - 8 W AC



Opt	3000K	249 lmS	189 lmD
30°	84242W30		
30°	84244W30		
30°	77611W30		
60°	84242W60		
60°	84244W60		
60°	77611W60		

Opt	2700K	849 lmS	632 lmD
31°	C00709BBMML		
31°	C00709DBMML		
43°	C00709BBMMW		
43°	C00709DBMMW		

Opt	3000K	886 lmS	660 lmD
31°	C00709BBWML		
31°	C00709DBWML		
31°	C00709GRWML		
43°	C00709BBWMW		
43°	C00709DBWMW		
43°	C00709GRWMW		




Accessories

Shaker 3 W AC

98624	Steel peg Ø10x160 mm
C-F500002	Steel peg Ø10x700 mm
C-F500003	Steel peg Ø10x1000 mm
98669	Steel peg L 101 mm
83246	45° cylindrical antiglare screen Ø49x40 mm

Shaker 8 W AC

98624	Steel peg Ø10x160 mm
C-F500002	Steel peg Ø10x700 mm
C-F500003	Steel peg Ø10x1000 mm
89371	Peg L 204 mm
C-U300018	45° cylindrical antiglare screen Ø70x50 mm



45° cylindrical antiglare screen

Finishes ■ Text black R9005 ■ Text green R6031
■ Dark brown





Corps en aluminium peint texturé noir.
Diffuseur en verre trempé extra-clair.



*Black textured painted aluminium body.
Extra-clear tempered glass diffuser.*

IRIS67



Iris67

arrayLED | 630 mA | 6 W DC





Opt | 3000K 783 lmS - 278 lmD

■ 1545° **84538W85**

Iris67

arrayLED | 350 mA | 13 W DC





Opt | 3000K 2100 lmS - 676 lmD

■ 1562° **84541W85**

Iris67

arrayLED | 630 mA | 22 W DC



Opt | 3000K 3593 lmS - 1351 lmD

■ 1652° **84544W85**

Electronics

Iris67 6 W

C-E200008 ON/OFF - 1-2 art. - ⌀ 35

99186 ON/OFF - 2-4 art.

C-E200002 DALI/PUSH - 2-4 art. - ⌀ 55

Iris67 13 W

C-E200006 ON/OFF - 1 art. - ⌀ 35

C-E200004 DALI/PUSH - 1 art. - ⌀ 55

Iris67 22 W

99186 ON/OFF - 1 art.

C-E200002 DALI/PUSH - 1 art. - ⌀ 55

Accessories

84890 Steel peg Ø17x250 mm

98112 Steel peg Ø17x700 mm

C-F500001 Steel peg Ø17x1000 mm

Finishes ■ Text black R9005






PROLAMP



Corps en aluminium peint texturé noir.
Diffuseur en verre trempé extra-clair avec sérigraphie noire.

*Black textured painted aluminium body.
Extra-clear tempered glass diffuser with black silkscreen printing.*

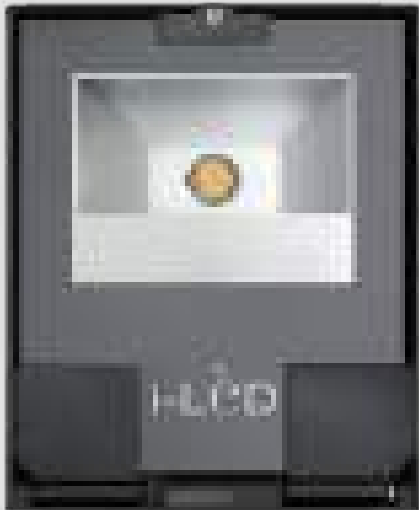


Optic 07



Optic 12

Prolamp
arrayLED | 220-240 V | 35 W DC - 40 W AC



Opt	3000K	5206 lmS	3677 lmD
Asy. Vw	82270W07		
75x89°	82270W12		





VISION



495



Corps en aluminium peint texturé gris ou brun foncé.

Grey or dark brown textured painted aluminium body.



Vision_1

220-240 V





GU10 1 x 35 W Max Halogen
(LED bulbs compatible)



51585
51586

Vision_2

220-240 V



GU10 1 x 50 W Max Halogen
(LED bulbs compatible)



51395
51396

Accessories

50370 Peg L 204 mm

Finishes  Text brilliant grey R9006
 Dark brown





CLIVO





Corps en laiton peint texturé noir ou marron foncé, ou avec une finition galvanique nickel brossé. Corps en acier inoxydable AISI 316L avec finition brossée (version en acier inoxydable). Diffuseur en verre trempé extra-clair.

Body in textured black or dark brown painted brass, or in the nickel galvanic finish.
AISI 316L stainless steel body with brushed finish (stainless steel version).
Extra-clear tempered glass diffuser.

**Clivo**


powerLED | 220-240 V AC | 1,6 W DC - 3 W AC



Opt | 3000K 249 lmS - 189 lmD
 10-66° **83577W85**

Clivo

powerLED | 630 mA | 2 W DC



Opt | 3000K 249 lmS - On req
 10-66° **84562W85**
 10-66° **84563W85**
 10-66° **97071W85**
 10-66° **97073W85**

Electronics

89420 ON/OFF - 1-2 art.
C-E200008 ON/OFF - 3-6 art. - Ø 35
99186 ON/OFF - 6-12 art.
C-E200002 DALI/PUSH - 5-12 art. - Ø 55



Accessories

84890 Steel peg Ø17x250 mm
98112 Steel peg Ø17x700 mm
C-F500001 Steel peg Ø17x1000 mm
98513 45° cylindrical antiglare screen

Finishes ■ Text black R9005 ■ Brushed nickel
 ■ Dark brown ■ Brushed steel

OUTDOOR

LIRA	515
OH!	519
OH! SMASH	523



SUSPENSIONS





LIRA




Corps et rosace en métal peint avec finition texturée de couleur noire ou brun foncé.
Diffuseur en résine polyuréthane de couleur blanche.

*Body and ceiling rose in textured painted black or dark brown metal.
Diffuser in white polyurethane resin.*

**Lira_PR**

topLED CRI 80 | 220-240 V
24 W DC - 29 W AC



Opt	3000K 3924 lmS - 1402 lmD
DI	9322
DI	9323


Finishes

- Dark brown
- Text black R9005





LIRA




489 561 635

Corps et rosace en acier inoxydable AISI 304 avec finition texturée noire ou brun foncé.
Diffuseur en résine polyuréthane blanche.

Body and ceiling rose in AISI 304 stainless steel painted in textured black or dark brown.
Diffuser in white polyurethane resin.

**Lira_PB**

topLED CRI 80 | 220-240 V
27 W DC - 31 W AC



Opt | 3000K 4136 lmS - 1352 lmD


DI | 9330
DI | 9331

Finishes ■ Dark brown
■ Text black R9005





OH!





Diffuseur en polyéthylène.
Rosace en métal peint avec finition texturée blanche.

*Polyethylene diffuser.
Ceiling rose in white textured painted metal.*





Oh!_P65 LED
arrayLED CRI 90 | 350 mA | 6 W DC





Opt | 3000K 836 lmS - 625 lmD
DI | **15111**

Oh!_P65 LED
topLED CRI 90 | 350 mA | 7 W DC




Opt | 3000K 1022 lmS - 845 lmD
DI | **16113**

Oh!_P65 LED
topLED CRI 90 | 220-240 V
13 W DC - 15 W AC




Opt | 3000K 1930 lmS - 1584 lmD
DI | **16106**

Oh!_P65 LED
topLED CRI 90 | 220-240 V
18 W DC - 20 W AC



Opt | 3000K 2748 lmS - 2115 lmD
DI | **16110**

Oh!_P65 LED
topLED CRI 90 | 220-240 V
26 W DC - 27 W AC



Opt | 3000K 3835 lmS - 2856 lmD
DI | **16115**

Electronics

Oh!_P65 LED 6W - Oh!_P65 LED 7W
KIT0066 ON/OFF Driver (1-2 art.)




Diffuseur en polyéthylène.
Rosace en métal peint avec finition texturée blanche.


Polyethylene diffuser.
Ceiling rose in white textured painted metal.





OH!



491 619 IN


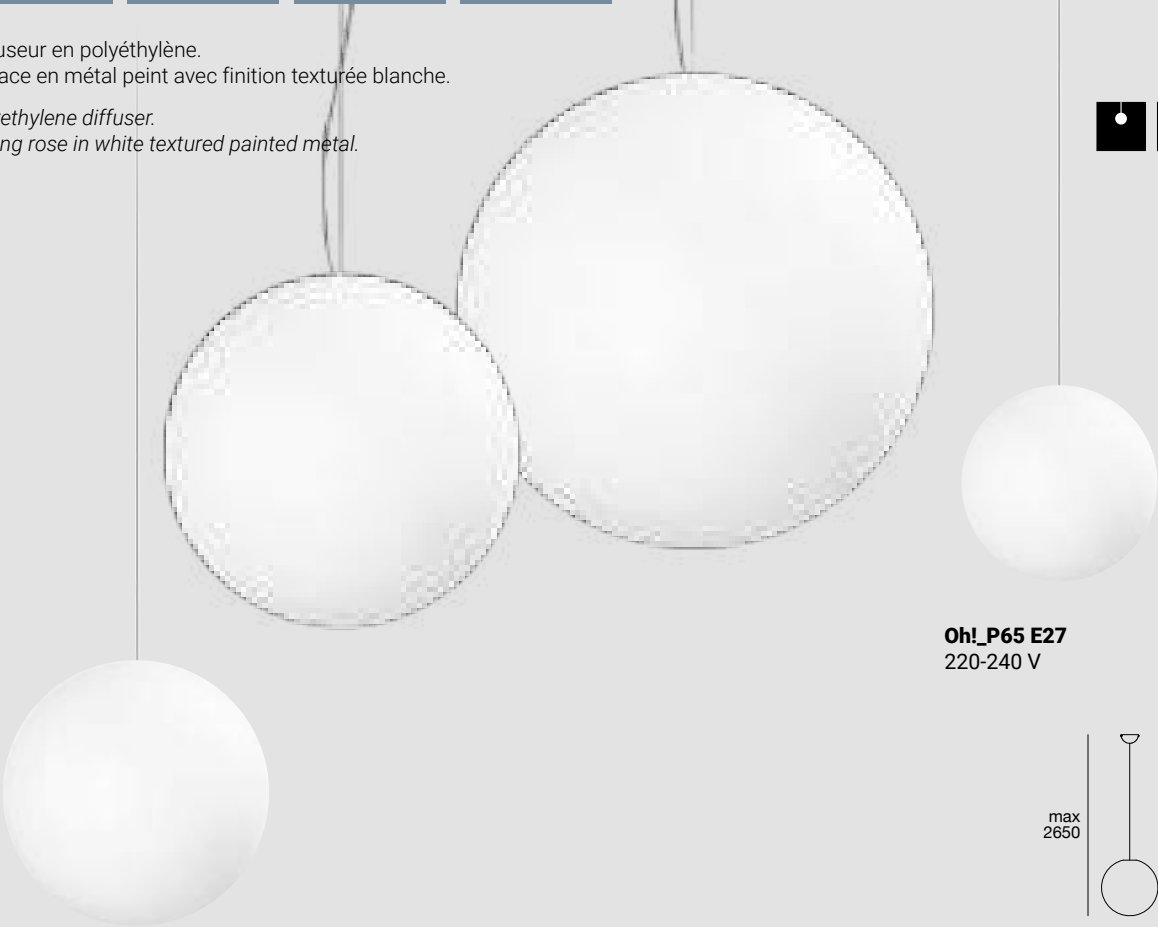


Oh!_P65 E27
220-240 V




E27 1 x 30 W Max Halogen
(LED/FLUORESCENT bulbs
compatible)
16180

Oh!_P65 E27
220-240 V




E27 1 x 46 W Max Halogen
(LED/FLUORESCENT bulbs
compatible)
16168

Oh!_P65 E27
220-240 V



E27 1 x 46 W Max Halogen
(LED/FLUORESCENT bulbs
compatible)
16169

Oh!_P65 E27
220-240 V



E27 1 x 57 W Max Halogen
(LED/FLUORESCENT bulbs
compatible)
16170



Diffuseur en polyéthylène.
Rosace en métal peint avec finition texturée blanche.


Polyethylene diffuser.
Ceiling rose in white textured painted metal.



OH! SMASH




Oh! Smash_P65 E27
220-240 V



2,5m

E27 1 x 30 W Max Halogen
(LED/FLUORESCENT bulbs
compatible)
16213

Oh! Smash_P65 E27
220-240 V





2,5m

E27 1 x 46 W Max Halogen
(LED/FLUORESCENT bulbs
compatible)
16216

OUTDOOR

HORUS	526
BLANK	535
CHOBIN65	539
MYWHITE	541
SWITCH	549
BOND	551
STADIUM	553



SURFACE


WALL & CEILING



HORUS

Une lumière murale ou plafond, parfaite pour tous types d'environnements extérieurs grâce à sa protection IP65, mais également magnifique pour décorer des espaces intérieurs. Les nombreuses combinaisons de décorations et de couleurs la rendent idéale pour interpréter au mieux les goûts et les styles contemporains. Horus représente le juste équilibre entre esthétique, performance et fiabilité dans le temps.


A wall or ceiling light, perfect for any kind of outdoor environment thanks to IP65, but also splendid for decorating interior contexts. The many combinations of decors and colours make it perfect for interpreting contemporary tastes and styles. Horus represents the right mix of aesthetics, performance and reliability over time.

LOTS OF DIFFERENT COMBINATIONS

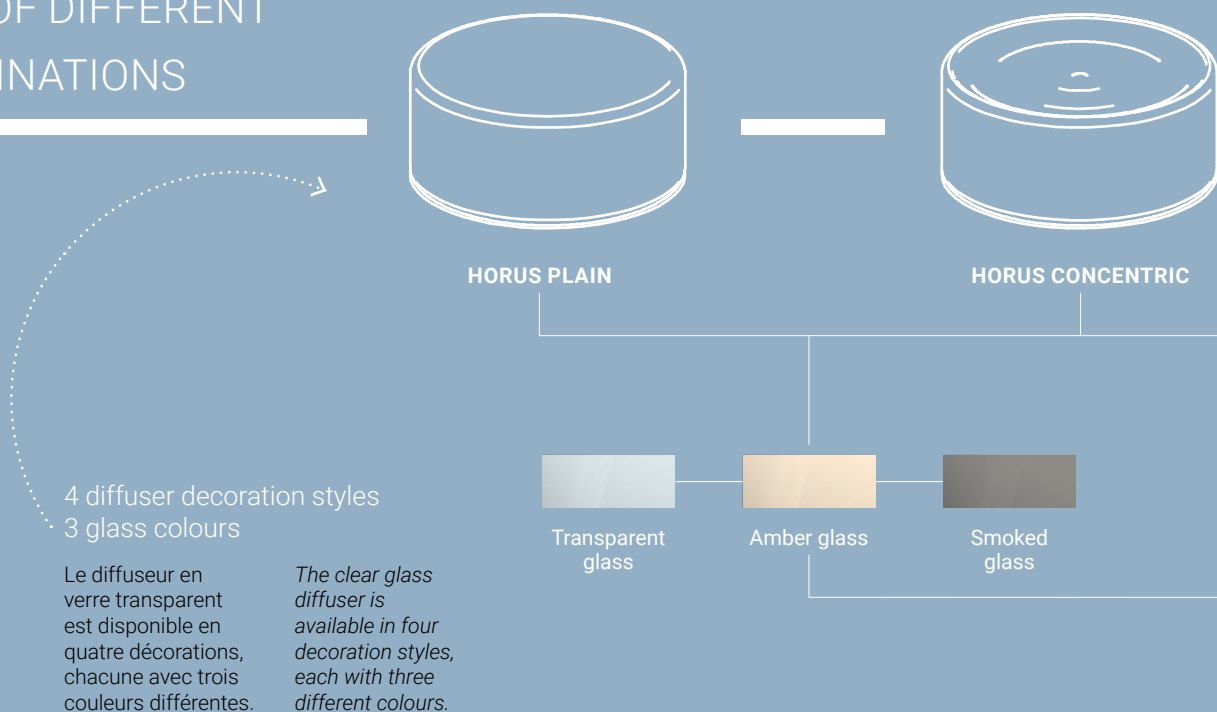





HORUS CONVEX




HORUS TEXTURED




Text white
R9003




Text black
R9005



Dark brown



Text brilliant
grey R9006



4 base finishes

Dans la base ronde en aluminium est logée la source LED. Il est possible de choisir parmi quatre finitions peintes texturées différentes.

The round aluminium base houses the LED source. There is a choice of four different textured painted finishes.





Base en aluminium peint texturé blanc, noir, gris ou brun foncé. Diffuseur en verre avec quatre décorations différentes (plain, concentrique, convexe et texturé) et trois couleurs (ambre, fumé et transparent).

White, black, grey or dark brown textured painted aluminium base. Glass diffuser in four different decoration styles (plain, concentric, convex and textured) and three colours (amber, smoked and transparent).


HORUS



Horus Plain

topLED CRI 90 | 220-240 V
10 W DC - 11 W AC

(A)





Opt 3000K 1103 lmS - 791 lmD

DI	CA074DE1WDI
DI	CA074DE2WDI
DI	CA074DE3WDI
DI	CA074DB1WDI
DI	CA074DB2WDI
DI	CA074DB3WDI
DI	CA074DD1WDI
DI	CA074DD2WDI
DI	CA074DD3WDI
DI	CA074DG1WDI
DI	CA074DG2WDI
DI	CA074DG3WDI

Horus Concentric

topLED CRI 90 | 220-240 V
10 W DC - 11 W AC

(B)





Opt 3000K 1103 lmS - 791 lmD

DI	CA120DE1WDI
DI	CA120DE2WDI
DI	CA120DE3WDI
DI	CA120DB1WDI
DI	CA120DB2WDI
DI	CA120DB3WDI
DI	CA120DD1WDI
DI	CA120DD2WDI
DI	CA120DD3WDI
DI	CA120DG1WDI
DI	CA120DG2WDI
DI	CA120DG3WDI

Horus Convex

topLED CRI 90 | 220-240 V
10 W DC - 11 W AC

(C)




Opt 3000K 1103 lmS - 791 lmD

DI	CA121DE1WDI
DI	CA121DE2WDI
DI	CA121DE3WDI
DI	CA121DB1WDI
DI	CA121DB2WDI
DI	CA121DB3WDI
DI	CA121DD1WDI
DI	CA121DD2WDI
DI	CA121DD3WDI
DI	CA121DG1WDI
DI	CA121DG2WDI
DI	CA121DG3WDI

Horus Textured

topLED CRI 90 | 220-240 V
10 W DC - 11 W AC

(D)



Opt 3000K 1103 lmS - 791 lmD

DI	CA122DE1WDI
DI	CA122DE2WDI
DI	CA122DE3WDI
DI	CA122DB1WDI
DI	CA122DB2WDI
DI	CA122DB3WDI
DI	CA122DD1WDI
DI	CA122DD2WDI
DI	CA122DD3WDI
DI	CA122DG1WDI
DI	CA122DG2WDI
DI	CA122DG3WDI

* DIMMER REQUIRED. Find it in "Electronics".

Electronics

KIT0026 Phase-cut dimmer - 100 W
KIT0080 Phase-cut CASAMBI dim - 1 art.

Finishes

Dark brown/Transparent glass	Dark brown/Smoked glass	Text brilliant grey R9006/Amber glass
Dark brown/Amber glass	Text brilliant grey R9006/Transparent glass	Text brilliant grey R9006/Smoked glass

HORUS



OUTDOOR | SURFACE











BLANK




Base en aluminium peint texturé blanc, noir, gris ou brun foncé.
Diffuseur en verre opalin blanc ou transparent dépoli.

*White, black, grey or dark brown textured painted aluminium base.
White opal or transparent pulegoso glass diffuser.*



Blank

topLED CRI 90 | 220-240 V
10 W DC - 11 W AC



Opt	3000K 1103 lmS - 830 lmD
DI	CA116DE4WDI
DI	CA116DE7WDI
DI	CA116DB4WDI
DI	CA116DB7WDI
DI	CA116DD4WDI
DI	CA116DD7WDI
DI	CA116DG4WDI
DI	CA116DG7WDI

* DIMMER REQUIRED. Find it in "Electronics".

Electronics

KIT0026 Phase-cut dimmer - 100 W
KIT0080 Phase-cut CASAMBI dim - 1 art.

Finishes

Text white R9003/White glass	Text black R9005/White glass	Dark brown/White glass	Text brilliant grey R9006/White glass
Text white R9003/Pulegoso glass	Text black R9005/Pulegoso glass	Dark brown/Pulegoso glass	Text brilliant grey R9006/Pulegoso glass









CHOBIN65





Diffuseur en silicone.
Monture en polycarbonate.

Silicone diffuser.
Polycarbonate fixture.





Chobin65 LED
topLED CRI 80 | 220-240 V
1,5 W DC - 2 W AC



Opt 3000K 266 lmS - 246 lmD
☐ DI **8322**

Chobin65 GX53
220-240 V | GX53



GX53 1 x 4 W Max
(LED bulb not included)
☐ **8321**

Accessories on request

☐ Custom metal disc
(min 25 pcs)



Accessories included

☐ Metal disc for radial emission (1x)









MYWHITE

Diffuseur en polyéthylène.
Monture en polycarbonate blanc.
*Polyethylene diffuser.
White polycarbonate fixture.*




MyWhite_R
topLED CRI 85 | 220-240 V
8 W DC - 10 W AC




Opt	3000K 987 lmS - 680 lmD
DI	7805
Opt	4000K 1226 lmS - 776 lmD
DI	7805N

MyWhite_R
topLED CRI 85 | 220-240 V
12 W DC - 16 W AC



Opt	3000K 1396 lmS - 1150 lmD
DI	7806
Opt	4000K 1533 lmS - 1313 lmD
DI	7806N


MyWhite_R Motion Sensor
topLED CRI 85 | 220-240 V
12 W DC - 16 W AC



Opt	3000K 1396 lmS - 1150 lmD
DI	7806S
Opt	4000K 1533 lmS - 1313 lmD
DI	7806NS

* Ø 5m - h 2,7m

MyWhite_R EM
topLED CRI 85 | 220-240 V
12 W DC - 16 W AC



Opt	3000K 1396 lmS - 1150 lmD
DI	7806E
Opt	4000K 1533 lmS - 1313 lmD
DI	7806NE







MYWHITE

Diffuseur en polyéthylène.
Monture en polycarbonate blanc.

Polyethylene diffuser.
White polycarbonate fixture.




MyWhite_Q
topLED CRI 85 | 220-240 V
8 W DC - 10 W AC




Opt	3000K 987 lmS - 680 lmD
DI	7807
Opt	4000K 1226 lmS - 776 lmD
DI	7807N

MyWhite_R
topLED CRI 85 | 220-240 V
12 W DC - 16 W AC



Opt	3000K 1396 lmS - 1150 lmD
DI	7808
Opt	4000K 1533 lmS - 1313 lmD
DI	7808N


MyWhite_R Motion Sensor
topLED CRI 85 | 220-240 V
12 W DC - 16 W AC



Opt	3000K 1396 lmS - 1150 lmD
DI	7808S
Opt	4000K 1533 lmS - 1313 lmD
DI	7808NS

* ø 5m - h 2,7m

MyWhite_R EM
topLED CRI 85 | 220-240 V
12 W DC - 16 W AC



Opt	3000K 1396 lmS - 1150 lmD
DI	7808E
Opt	4000K 1533 lmS - 1313 lmD
DI	7808NE


Finishes ☐ Natural polyethylene






Diffuseur en polyéthylène.
Monture en polycarbonate blanc.

Polyethylene diffuser.
White polycarbonate fixture.

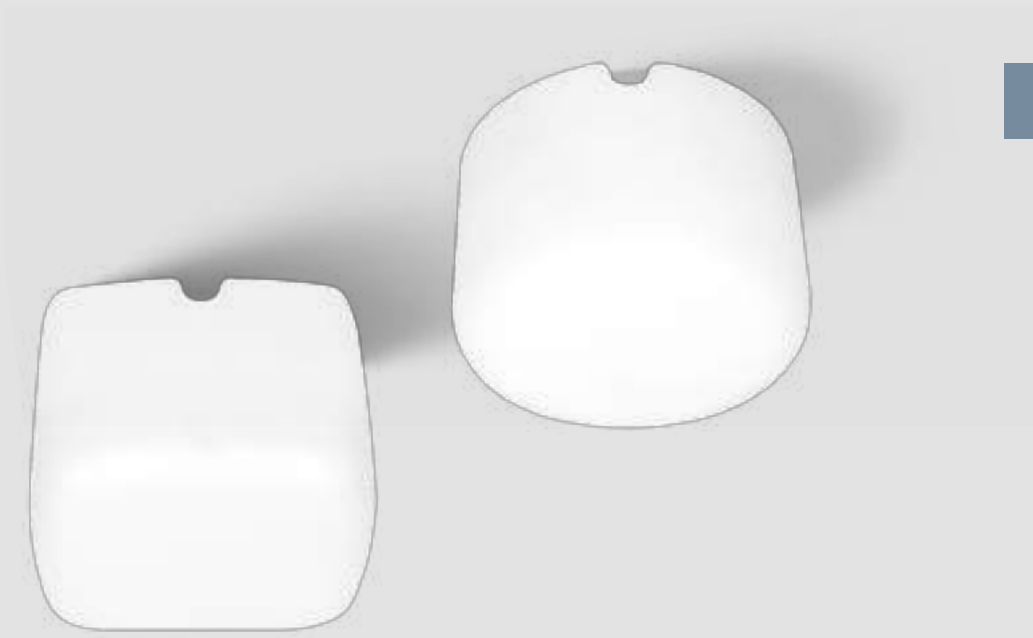

MiniWhite_Q
topLED CRI 85 | 220-240 V
3 W DC - 4 W AC



- Opt

DI

3000K 354 lmS - 311 lmD


8029
- Opt

DI

4000K 462 lmS - 355 lmD

8029N

MiniWhite_R
topLED CRI 85 | 220-240 V
3 W DC - 4 W AC



- Opt

DI

3000K 354 lmS - 311 lmD

8028
- Opt

DI

4000K 462 lmS - 355 lmD


8028N







MYWHITE

Diffuseur en polyéthylène.
Monture en polycarbonate blanc.
*Polyethylene diffuser.
White polycarbonate fixture.*

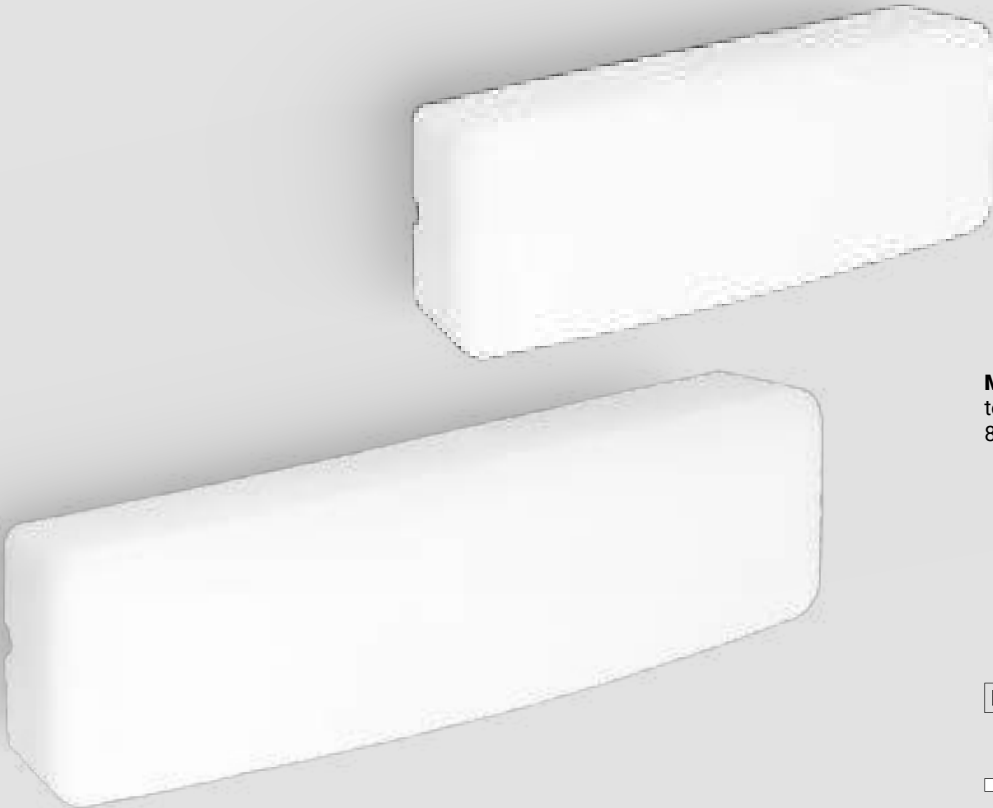


MyWhite_B
topLED CRI 85 | 220-240 V
8 W DC - 11 W AC




Opt	3000K 1002 lmS - 701 lmD
DI	7809
Opt	4000K 1040 lmS - 800 lmD
DI	7809N

MyWhite_B
topLED CRI 85 | 220-240 V
13 W DC - 17 W AC



Opt	3000K 1586 lmS - 1009 lmD
DI	7810
Opt	4000K 1641 lmS - 1152 lmD
DI	7810N


MyWhite_B Motion Sensor
topLED CRI 85 | 220-240 V
13 W DC - 17 W AC



Opt	3000K 1586 lmS - 1009 lmD
DI	7810S
Opt	4000K 1641 lmS - 1152 lmD
DI	7810NS

* ø 5m - h 2,7m

MyWhite_B EM
topLED CRI 85 | 220-240 V
13 W DC - 17 W AC



Opt	3000K 1586 lmS - 1009 lmD
DI	7810E
Opt	4000K 1641 lmS - 1152 lmD
DI	7810NE



Diffuseur en polyéthylène.
Monture en polycarbonate blanc.


Polyethylene diffuser.
White polycarbonate fixture.



SWITCH




Switch
topLED CRI 80 | 220-240 V
10 W DC - 12 W AC




Opt	2700K	1300 lmS - 1070 lmD
	3000K	1300 lmS - 1110 lmD
	4000K	1300 lmS - 1151 lmD
	DI 9170	

Switch
topLED CRI 80 | 220-240 V
16 W DC - 18 W AC



Opt	2700K	1800 lmS - 1616 lmD
	3000K	1800 lmS - 1665 lmD
	4000K	1800 lmS - 1716 lmD
	DI 9171	

Switch
topLED CRI 80 | 220-240 V
23 W DC - 25 W AC



Opt	2700K	2500 lmS - 2247 lmD
	3000K	2500 lmS - 2317 lmD
	4000K	2500 lmS - 2389 lmD
	DI 9172	

Finishes ☐ Natural polyethylene



Diffuseur en polyéthylène.
Monture en polycarbonate noir.

*Polyethylene diffuser.
Black polycarbonate fixture.*



Bond_W
topLED CRI 85 | 220-240 V
11 W DC - 12 W AC



Opt	2700K	1282 lmS	921 lmD
DI	8672M		
Opt	3000K	1350 lmS	970 lmD
DI	8672		







Corps en polycarbonate peint texturé noir ou blanc.
Diffuseur en polycarbonate opalin.

*Black or white textured painted polycarbonate body.
Opal polycarbonate diffuser.*

STADIUM

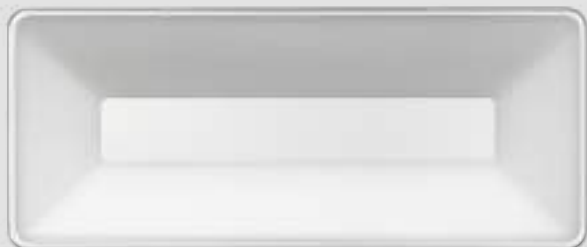


Stadium

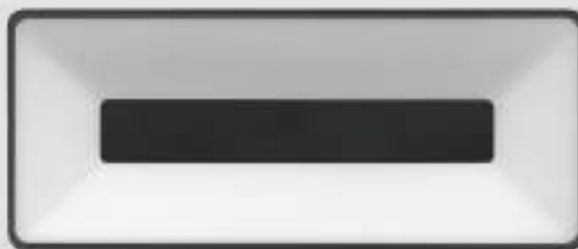

Stadium


topLED | 220-240 V AC
6,4 W DC - 7,8 W AC



Opt	2700K 1192 lmS - 596 lmD
DI	76078M00
DI	76079M00

Opt	3000K 1246 lmS - 623 lmD
DI	76078W00
DI	76079W00

Opt	4000K 1291 lmS - 647 lmD
DI	76078N00
DI	76079N00



Full light

Opt	2700K 1192 lmS - 678 lmD
DI	77186M00

Opt	3000K 1246 lmS - 709 lmD
DI	77186W00

Opt	4000K 1291 lmS - 734 lmD
DI	77186N00

Accessories

83247	Inclined bracket for wall installation
83248	Inclined bracket for wall installation



Stadium Full light



Stadium





Stadium Full light

Finishes Text white R9003 Opaline polycarbonate
 Text black R9005

OUTDOOR

FYLO+ OUT	557
CUBIT	559
LIRA	561
ALBA	563



WALL







Profilé en aluminium prétraité avec revêtement en résine de poudres de quartz et matériau de construction mélangé.

Pre-treated aluminium profile with cover in quartz powder resin and mixed building material.

FYLO+ OUT


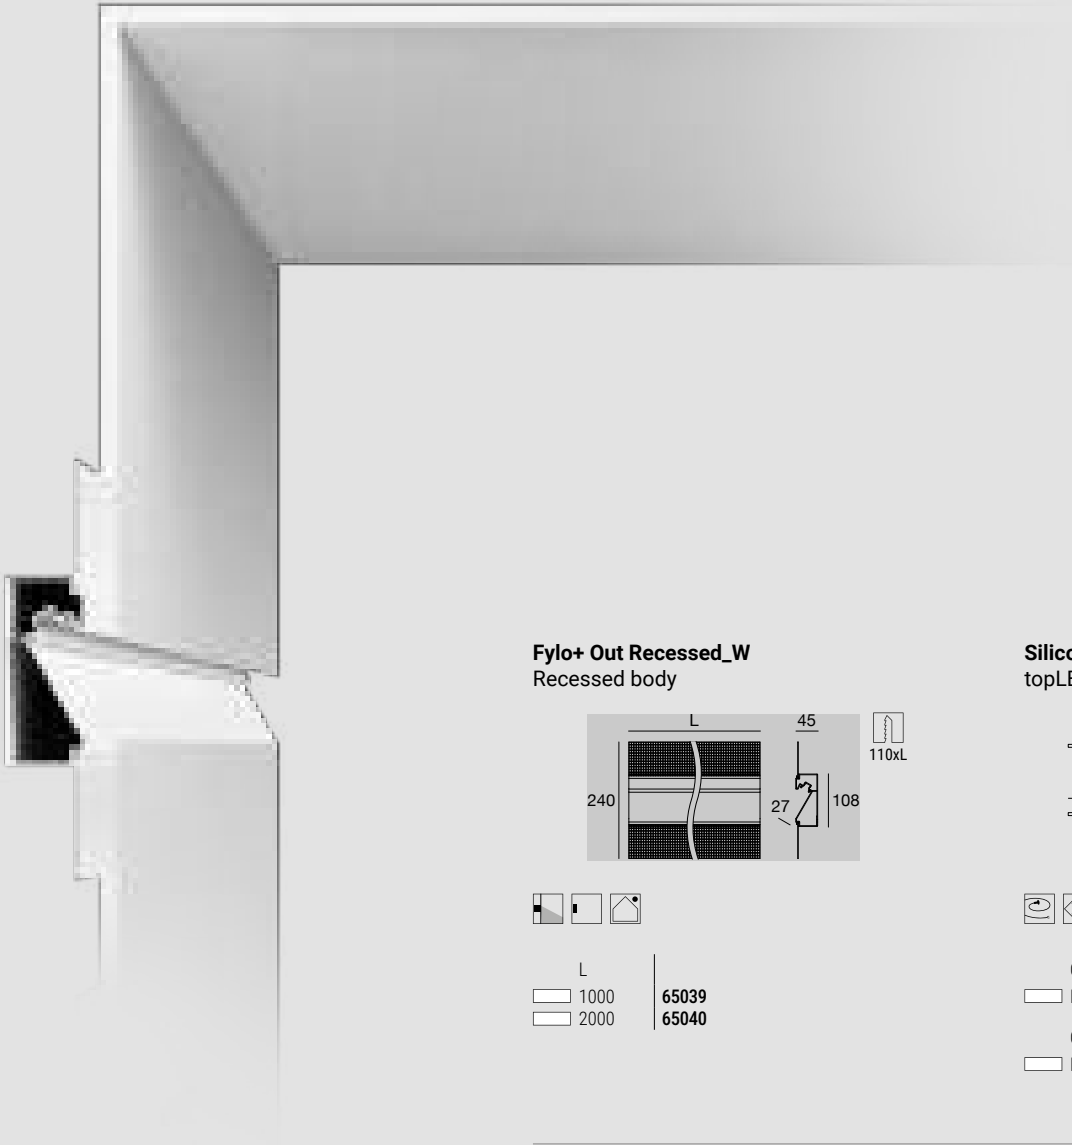


Fylo+ Out Recessed_W
Recessed body



L		
	1000	65039
	2000	65040

Silicone | 120 LED/m
topLED CRI 90 | 24 V DC | 9,6 W/m



Opt	2700K 4040 lmS - 4040 lmD
☐ DI	C0052MDI05019
Opt	3000K 4323 lmS - 4323 lmD
☐ DI	C0052WDI05019

Electronics

Silicone 9,6 W/m

99374	ON/OFF - 75W - Φ 56
99331	ON/OFF - 150W - Φ 70
99332	0/1-10V - 150W - Φ 70
83333	DALI/PUSH - 150W - Φ 77
C-E400002	DALI/PUSH - 240W - Φ 77

Accessories

62757	1 m opaline diffuser
62758	2 m opaline diffuser
65023	2x sealing caps
65038	Template - 1000x47xh112





Corps en aluminium peint texturé blanc ou noir.
White or black textured painted aluminium body.




Optics design:



- 30 12 00
- Finishes** Text white R9003
 Text black R9005

Cubit
powerLED | 220-240 V AC




Single emission - 2,6 W DC - 3,2 W AC
Opt 3000K 213 lmS - 208 lmD
 DI **77413W00**
 DI **77414W00**



Double emission - 5,2 W DC - 6,5 W AC
Opt 3000K 850 lmS - 416 lmD
 DI+DI **77423W00**
 DI+DI **77424W00**

Cubit
arrayLED-Direct | 220-240 V AC



Single emission - 7 W AC
Opt 3000K 865 lmS - 467 lmD
 27° **76649W30**
 27° **76650W30**
Opt 3000K 865 lmS - 490 lmD
 82° **76634W12**
 82° **76635W12**




Double emission - 14 W AC
Opt 3000K 1730 lmS - 940 lmD
 27+27° **76654W30**
 27+27° **76655W30**
Opt 3000K 1730 lmS - 980 lmD
 82+82° **76639W12**
 82+82° **76640W12**





LIRA



Corps et fixation en acier inoxydable AISI 304 peint texturé noir ou brun foncé. Diffuseur en résine polyuréthane blanche.

Body and fixture in AISI 304 stainless steel painted in textured black or dark brown. Diffuser in white polyurethane resin.




Lira_W
topLED CRI 80 | 220-240 V
13 W DC - 16 W AC



Opt	3000K	2068 lmS - 579 lmD
DI	9338	
DI	9339	

Lira_W
topLED CRI 80 | 220-240 V
19 W DC - 21 W AC




Opt	3000K	2952 lmS - 1001 lmD
DI	9340	
DI	9341	






Corps et fixation en aluminium peint texturé blanc, noir, brun foncé ou gris. Diffuseur en verre transparent.

Body and fixture in white, black, dark brown or grey textured painted aluminium. Transparent glass diffuser.

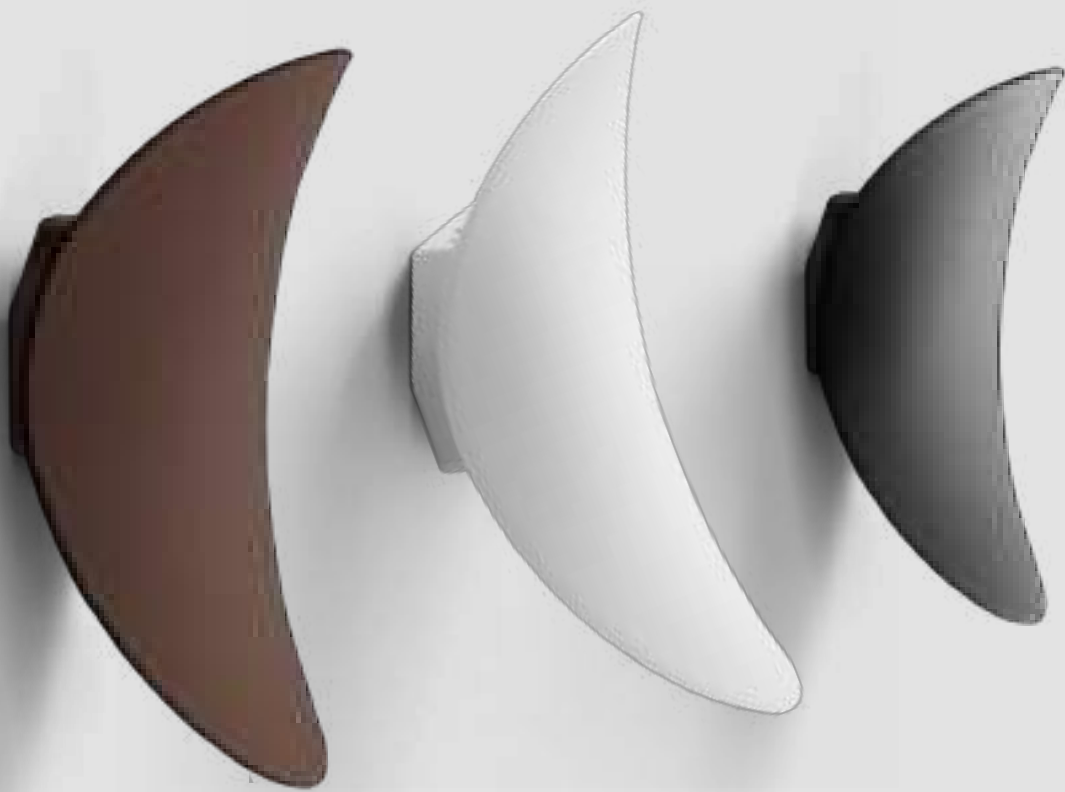


Alba
arrayLED CRI 90 | 220-240 V
31 W DC - 34 W AC



Opt	2700K 1782 lmS - 1702 lmD
DI	9664M
DI	9665M
DI	9662M
DI	9663M
Opt	3000K 1916 lmS - 1822 lmD
DI	9664
DI	9665
DI	9662
DI	9663

OUTDOOR

OPTIWALL	567
ENVELOPE	569
QUARA	573
CLIP	577
CHIM	579
SAND	581





STEP LIGHTS





Corps en aluminium peint texturé blanc, brun foncé ou noir-gris.
White, dark brown or black grey textured painted aluminium body.

OPTIWALL

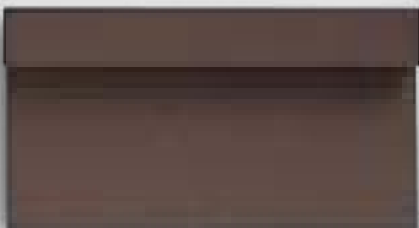
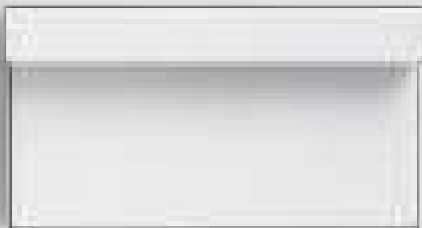


Optiwall
topLED | 24 V DC | 3,5 W DC



Opt	3000K 474 lmS - 354 lmD
Asy, DI	77387W07
Asy, DI	77389W07
Asy, DI	77390W07

Optiwall
topLED | 24 V DC | 3,5 W DC



Opt	3000K 474 lmS - 382 lmD
Asy, DI	77383W07
Asy, DI	77385W07
Asy, DI	77386W07

Electronics

89488	ON/OFF - 1-3 art.
89179	ON/OFF - 1-5 art.
99331	ON/OFF - 1-33 art. - 70
99332	0/1-10V - 1-33 art. - 70
83333	DALI/PUSH - 1-33 art. - 77



*** BUG rating 0:**
Uniquement pour les finitions
Noir-Gris et Brun Foncé.
*Only for the finishes
Black Grey and Dark Brown*





Corps en aluminium peint texturé blanc, noir, brun foncé ou noir-gris.


White, black, dark brown or black grey textured painted aluminium body.

ENVELOPE



Envelope_1

powerLED | 350 mA | 1 W DC




Opt | 2700K 145 lmS - 30 lmD
 Asy. DI | **96976M07**
 Asy. DI | **96977M07**

Opt | 3000K 154 lmS - 31 lmD
 Asy. DI | **96976W07**
 Asy. DI | **96977W07**
 Asy. DI | **96979W07**
 Asy. DI | **80605W07**

Installation with recessed casing

Envelope_R

powerLED | 350 mA | 1 W DC




Opt | 2700K 145 lmS - 35 lmD
 Asy. DI | **83601M07**
 Asy. DI | **83602M07**

Opt | 3000K 154 lmS - 37 lmD
 Asy. DI | **83601W07**
 Asy. DI | **83602W07**
 Asy. DI | **83604W07**
 Asy. DI | **84071W07**


Installation with recessed casing

Envelope_R

topLED | 24 V DC | 4 W DC



Ø132




Opt | 3000K 468 lmS - 227 lmD
 Asy. DI | **76090W07**
 Asy. DI | **76093W07**
 Asy. DI | **76092W07**


Surface installation

Envelope_RW

topLED | 220-240 V AC | 2 W DC - 2,5 W AC



Ø132



Opt | 3000K 370 lmS - 156 lmD
 Asy. DI | **77044W07**
 Asy. DI | **77047W07**
 Asy. DI | **77046W07**

Surface installation or with recessed casing

Electronics

Envelope_1 - Envelope_R 1W
89419 ON/OFF - 1-2 art.
89421 ON/OFF - 3-6 art.
C-E200006 ON/OFF - 6-12 art. - 70 35
C-E200004 DALI/PUSH - 5-12 art. - 70 55

Envelope_R 4W
89488 ON/OFF - 1-3 art.
89179 ON/OFF - 1-5 art.
99331 ON/OFF - 1-33 art. - 70 70
99332 0/1-10V - 1-33 art. - 70 70
83333 DALI/PUSH - 1-33 art. - 70 77

Recessed casings

Envelope_1 - Envelope_R 1W
84336 Ø35xh42
84915 Ø60xh49

Envelope_RW
98111 107x74xh50
 (standard box mod. 503)

Finishes Text white R9003 Text black grey R7021
 Text black R9005 Dark brown






ENVELOPE


Corps en aluminium peint texturé
blanc, brun foncé ou noir-gris.

White, dark brown or black grey textured
painted aluminium body.



Envelope_Q

topLED | 24 V DC | 4 W DC




Opt	3000K 468 lmS - 296 lmD
Asy. D1	76098W07
Asy. D1	76101W07
Asy. D1	76100W07

Installation with recessed casing

Envelope_QW

topLED | 24 V DC | 4 W DC




Opt	3000K 468 lmS - 296 lmD
Asy. D1	76094W07
Asy. D1	76097W07
Asy. D1	76096W07

Surface installation

Envelope_W

topLED | 220-240 V DC | 6 W DC - 8 W AC



Opt	3000K 669 lmS - 444 lmD
Asy. D1	81343W07
Asy. D1	81292W07
Asy. D1	81290W07

Surface installation or with recessed casing

Electronics

Envelope_Q - Envelope_QW	
89488	ON/OFF - 1-3 art.
89179	ON/OFF - 1-5 art.
99331	ON/OFF - 1-33 art. - 70
99332	0/1-10V - 1-33 art. - 70
83333	DALI/PUSH - 1-33 art. - 77

Recessed casings

Envelope_W	
99744	181x42,5x179
Envelope_Q	
98111	107x74xh50 (standard box mod. 503)





QUARA




IN

Corps en aluminium peint en blanc ou brun foncé,
ou en acier inoxydable AISI 316L.

Body in white or dark brown textured painted
aluminium, or AISI 316L stainless steel.

**Quara_F**


powerLED | 350 mA | 1 W DC



Opt	2700K 145 lmS - 37 lmD
Asy. Ww	84078M70
Opt	3000K 154 lmS - 39 lmD
Asy. Ww	84078W70

Quara_F


powerLED | 350 mA | 1 W DC



Opt	2700K 145 lmS - 72 lmD
Asy. Ww	86460M70
Opt	3000K 154 lmS - 77 lmD
Asy. Ww	86460W70

Quara_RO


powerLED | 350 mA | 1 W DC



Opt	3000K 154 lmS - 36 lmD
Asy. Ww	77391W70
Asy. Ww	77393W70

Quara_RI


powerLED | 630 mA | 2 W DC



Opt	3000K 249 lmS - 91 lmD
Asy. Ww	92671W70

Quara_R

powerLED



220-240 V AC - 2 W DC - 2,7 W AC	
Opt	2700K 233 lmS - 117 lmD
Asy. Ww	83579M70
Asy. Ww	83581M70
Opt	3000K 249 lmS - 125 lmD
Asy. Ww	83579W70
Asy. Ww	83581W70



630 mA - 2 W DC	
Opt	2700K 233 lmS - 117 lmD
Asy. Ww	85543M70
Asy. Ww	87988M70
Opt	3000K 249 lmS - 125 lmD
Asy. Ww	85543W70
Asy. Ww	87988W70

Electronics

Quara_R 630 mA 2 W DC - Quara_RI
89420 ON/OFF - 1-2 art.
C-E200008 ON/OFF - 3-6 art. - 35
99186 ON/OFF - 6-12 art.
C-E200002 DALI/PUSH - 5-12 art. - 55

Quara_F - Quara_RO
89419 ON/OFF - 1-2 art.
89421 ON/OFF - 3-6 art.
C-E200006 ON/OFF - 6-12 art. - 35
C-E200004 DALI/PUSH - 5-12 art. - 55

Recessed casings

Quara_F - Quara_R - Quara_RI
84338 Ø62xh72

Quara_F
83155 Ø31xh31

Quara_RO
84915 Ø60xh49

Finishes Text white R9003 Dark brown
 Brushed steel



Corps en aluminium peint en blanc ou brun foncé,
ou en acier inoxydable AISI 316L.


Body in white or dark brown textured painted
aluminium, or AISI 316L stainless steel.




QUARA



IN



Quara_Q
powerLED




ID

220-240 V AC - 2 W DC - 2,7 W AC
Opt 3000K 249 lmS - 125 lmD
Asy. Ww 83583W70
Asy. Ww 83585W70



630 mA - 2 W DC
Opt 3000K 249 lmS - 125 lmD
Asy. Ww 86563W70
Asy. Ww 87989W70

Quara_QI
powerLED | 630 mA | 2 W DC



Opt 3000K 249 lmS - 91 lmD
Asy. Ww 92672W70

Electronics

Quara_Q 630 mA-2 W DC - Quara_QI
89420 ON/OFF - 1-2 art.
C-E200008 ON/OFF - 3-6 art. - Ø 35
99186 ON/OFF - 6-12 art.
C-E200002 DALI/PUSH - 5-12 art. - Ø 55

Recessed casings

84338 Ø62xh72





Corps en laiton peint texturé blanc ou brun foncé.
White or dark brown textured painted brass body.



Clip_Hm
powerLED | 350 mA | 1 W DC



Opt	3000K 145 lmS - 42 lmD
Asym.	82701W07
Asym	82703W07

Electronics

89419	ON/OFF - 1-2 art.
89421	ON/OFF - 3-6 art.
C-E200006	ON/OFF - 6-12 art. - 35
C-E200004	DALI/PUSH - 5-12 art. - 55

Recessed casings

84336	Ø35xh42
84915	Ø60xh49





CHIM

Corps en nylon.
Flasque en acier inoxydable AISI 316L.

*Nylon body.
AISI 316L stainless steel flange.*

**Chim**

powerLED | 220-240 V AC | 4 W DC - 4,8 W AC



Opt | 3000K 498 lmS - 321 lmD
Asy, Ww | **92681W12**

Recessed casings


98009 61x105xh150






SAND

Corps en laiton.
Diffuseur en polycarbonate opalin.
*Brass body.
Opaline polycarbonate diffuser.*




Sand_R
powerLED | 350 mA | 1 W DC



Opt 3000K 154 lmS - 85 lmD
DI 92260W00

Sand_Q
powerLED | 350 mA | 1 W DC



Opt 3000K 154 lmS - 78 lmD
DI 92262W00

Electronics



- 89419 ON/OFF - 1-2 art.
- 89421 ON/OFF - 3-6 art.
- C-E200006 ON/OFF - 6-12 art. - 35
- C-E200004 DALI/PUSH - 5-12 art. - 55

Recessed casings

- 84915 Ø60xh49
- 84336 Ø35xh42

OUTDOOR

SUELO	585
ORMA	587
BERET	591
TEXO	593
ALCOR	595
ALCOR316	597
FOOTPAD	599
ASTROPEK	601



INGROUND





SUELO




Corps en aluminium.
Flasque en acier inoxydable AISI 316L.

Aluminium body.
AISI 316L stainless steel flange.

Suelo_RX


powerLED | 220-240 V AC | 8 W DC - 9 W AC



Opt | 3000K 1087 lmS - 931 lmD
26° | **76205W30**

Suelo_RX


arrayLED | 220-240 V AC | 16 W DC - 18 W AC



Opt | 3000K 2634 lmS - 1790 lmD
37° | **76119W30**

Suelo_RXJ

powerLED | 220-240 V AC | 8 W DC - 9 W AC




Opt | 3000K 760 lmS - 558 lmD
30° | **80581W30**

Recessed casings & Accessories

Suelo_RX / _RXJ Ø112 h152

98122 Recessed casing Ø110xh198

Suelo_RX Ø185 h186

83328 Recessed casing Ø300xh210**83330** Back plate for recessed casing**83331** Template for recessed casing version for flush flange

OUTDOOR | INGROUND

Electronics

Orma_I / _IJ - 4W

- 89421** ON/OFF - 1 art.
C-E200006 ON/OFF - 2-3 art. - € 35
C-E200004 DALI/PUSH - 2-3 art. - € 55

Orma_I / _IJ - 5W

- 89488** ON/OFF - 1-2 art.
89179 ON/OFF - 1-4 art.
89359 ON/OFF - 1-9 art.
 Dimmer + Driver 24 V DC
99660 Dimmer DALI - 0/1-10V - € 48
83042 Dimmer DALI/PUSH - 0/1-10V € 45
99331 Driver 24V DC - 150 W - 1-21 art. € 70
99786 Driver 24V DC - 240 W - 1-33 art. € 81

Orma_I 8W

- 99342** ON/OFF - 1 art.
C-E200005 DALI/PUSH - 1 art. - € 55

Orma_I 9W

- 89179** ON/OFF - 1-2 art.
89359 ON/OFF - 1-5 art.
99331 ON/OFF - 1-15 art.
 Dimmer + Driver 24 V DC
99660 Dimmer DALI - 0/1-10V - € 48
83042 Dimmer DALI/PUSH - 0/1-10V € 45
99331 Driver 24V DC - 150 W - 1-11 art. € 70
99786 Driver 24V DC - 240 W - 1-18 art. € 81

Orma_I RGBW 8W

- Dimmer RF + RF remote 6-12 art. - € 52
C-E700003 + C-W600001
C-E500011 Dimmer DMX - 6-12 art.
DMX Controllers pag. XXIX
Driver CV CV 48V pag. XVIII
Switching CV 48V pag. XII-XIII

Recessed casings

Orma_I / _IJ / _IL - Ø64

99650 Ø97xh76

Orma_I / _IL - Ø97

99651 Ø114xh76

Cables

Orma_I RGBW

- 24 V DC / 220-240 V AC | Cable with F-connector
99216 Conn. F.4 pin M12 (L 1 m)
89190 Conn. F.4 pin M12 (L 5 m)

Orma_I RGBW

- 24 V DC / 220-240 V AC | Cable with M-connector
98476 Conn. M.4 pin M12 (L 1 m)
98477 Conn. M.4 pin M12 (L 5 m)

Orma_I RGBW

- 24 V DC 220-240V AC | Extension cable with M+F connectors
98437 Conn M. + F. 4 pin M12 (L 1 m)
98149 Conn M. + F. 4 pin M12 (L 5 m)
89188 Conn M. + F. 4 pin M12 (L 10 m)



ORMA




481

Corps en aluminium. Flasque en acier inoxydable AISI 316L.
Diffuseur en verre trempé extra-clair.

Aluminium body. AISI 316L stainless steel flange.
Extra-clear tempered glass diffuser.


Orma_I powerLED

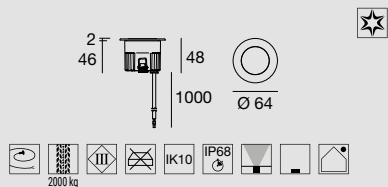

C.C. - 350 mA - 4 W DC
Opt | 3000K 490 lmS - 270 lmD
■ ■ ■ 29° | **80582W30**

C.V. - 24 V DC - 5 W DC
Opt | 3000K 490 lmS - 270 lmD
■ ■ ■ 29° | **80585W30**


Orma_IJ powerLED

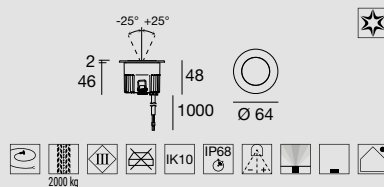

C.C. - 350 mA - 4 W DC
Opt | 3000K 490 lmS - 270 lmD
■ ■ ■ 29° | **81199W30**


C.V. - 24 V DC - 5 W DC
Opt | 3000K 490 lmS - 270 lmD
■ ■ ■ 29° | **81200W30**

Orma_I arrayLED

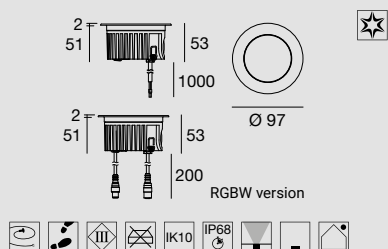


C.C. - 220 mA - 8 W DC
Opt | 3000K 1182 lmS - 933 lmD
■ ■ ■ 32° | **80588W30**

C.V. - 24 V DC - 9 W DC
Opt | 3000K 1320 lmS - 1041 lmD
■ ■ ■ 32° | **81172W30**




C.C. - 630 mA - 8 W DC
Opt | RGBW (3000 K)
■ ■ ■ 40-49° | **81321V45**

Orma_I arrayLED-Direct | 220-240 V AC | 7 W AC

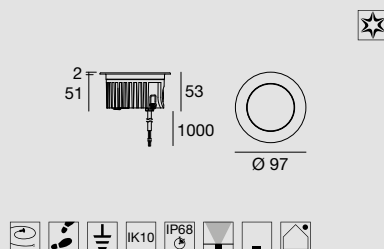

Opt | 3000K 865 lmS - 560 lmD
■ ■ ■ 33° | **76080W30**

Orma_IL arrayLED-Direct | 220-240 V AC | 7 W AC

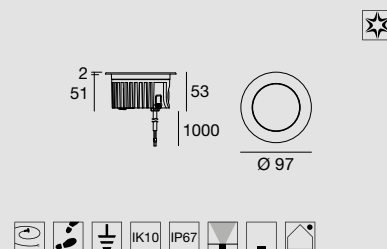

Opt | 3000K 865 lmS - 106 lmD
■ ■ ■ 33° | **76081W00**







ORMA




481

Corps en aluminium avec flasque en acier inoxydable AISI 316L. Corps et flasque peints texturés en finitions blanc ou noir (version Orma_FO).
Diffuseur en verre trempé extra-clair.

*Aluminium body with AISI 316L stainless steel flange. Textured painted body and flange in white or black finish (Orma_FO version).
Extra-clear tempered glass diffuser.*


Orma_A powerLED

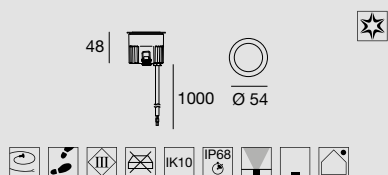

C.C. - 350 mA - 4 W DC
Opt 3000K 490 lmS - 270 lmD
■ ■ ■ 29° **81181W30**


C.V. - 24 V DC - 5 W DC
Opt 3000K 490 lmS - 270 lmD
■ ■ ■ 29° **81184W30**

Orma_A arrayLED | 220 mA | 8 W DC

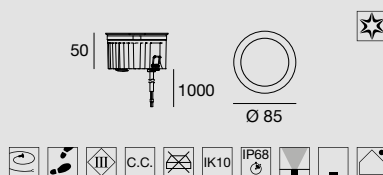

Opt 3000K 1182 lmS - 933 lmD
■ ■ ■ 31° **81187W30**

Orma_FO topLED | 24 V DC | 1,8 W DC

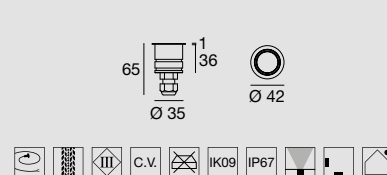

Opt 3000K 60 lmS - 8 lmD
■ DI **95474W00**
■ DI **95475W00**

En cas d'installation avec boîtier encastré 98292, la sortie du câble est droite, pas latérale à 90°.

In case of installation with recessed casing 98292, the cable outlet is straight, not lateral at 90°.

Electronics

Orma_A 4W
89421 ON/OFF - 1 art.
C-E200006 ON/OFF - 2-3 art. - Ø 35
C-E200004 DALI/PUSH - 2-3 art. - Ø 55

Orma_A 5W
89488 ON/OFF - 1-2 art.
89179 ON/OFF - 1-4 art.
89359 ON/OFF - 1-9 art.
Dimmer + Driver 24 V DC
99660 Dimmer DALI - 0/1-10V - Ø 48
83042 Dimmer DALI/PUSH - 0/1-10V - Ø 45
99331 Driver 24V DC - 150 W - 1-21 art. Ø 70
99786 Driver 24V DC - 240 W - 1-33 art. Ø 81

Orma_A 4W
99342 ON/OFF - 1 art.
C-E200005 DALI/PUSH - 1 art. - Ø 55

Orma_FO 1,8W
89488 ON/OFF - 1-7 art.
89179 ON/OFF - 1-12 art.
89359 ON/OFF - 1-28 art.
99332 0/1-10V - 1-75 art. - Ø 70
83333 DALI/PUSH - 1-75 art. - Ø 77

Recessed casings

Orma_A Ø54 h48
99650 Ø97xh76
99855 Ø97xh78
99560 Ø97xh78

Orma_FO
98292 Ø43xh80
98291 105xh98/138

Accessories

Orma_FO
83235 Suction cup



Electronics

Beret_R - Beret_X Anti-glaring - Beret_Q

89419 ON/OFF - 1-2 art.

89421 ON/OFF - 3-6 art.

C-E200006 ON/OFF - 6-12 art. - Ø 35

C-E200004 DALI/PUSH - 5-12 art. - Ø 55

Beret_2R 2W IP67 - Beret_2Q 2W IP67

89420 ON/OFF - 1-2 art.

C-E200008 ON/OFF - 3-6 art. - Ø 35

99186 ON/OFF - 6-12 art.

C-E200002 DALI/PUSH - 5-12 art. - Ø 55

Beret_2R 3W IP40 - Beret_2Q 3W IP40

C-E100046 ON/OFF - 1-6 art. - Ø 48

C-E100033 ON/OFF - 4-12 art. - Ø 50

C-E100047 DALI - 1-3 art. - Ø 40

C-E100034 DALI/PUSH - 4-12 art. - Ø 50

Recessed casings

Beret_R - Beret_X Anti-glaring - Beret_Q

84336 Ø35xh42

84915 Ø60xh49

Beret_2R - Beret_2Q

84918 Ø60xh87




BERET

Corps en laiton ou en aluminium. Flasque en acier brossé, ou en laiton peint texturé blanc ou dans les finitions galvanisées chrome brillant et nickel brossé. Diffuseur en verre trempé extra-clair.

Brass or aluminium body. Flange in brushed steel, or white textured painted brass or in polished chrome and brushed nickel galvanic finishes. Extra-clear tempered glass diffuser.

Beret_R


powerLED | 350 mA | 1 W DC

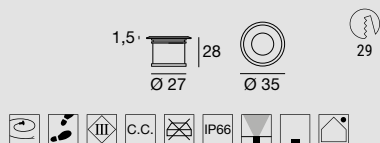

Opt	3000K 154 lmS - 98 lmD
21°	92065W15
26°	92065W30
DI	92065W00
26°	92066W30
21°	92067W15
26°	92067W30
57°	92067W60
DI	92067W00
21°	92068W15
26°	92068W30
57°	92068W60
DI	92068W00
Opt	4000K 165 lmS - 105 lmD
26°	92067N30
DI	92067N00
26°	92068N30
DI	92068N00

Beret_2R


powerLED | 630 mA - 2 WDC | 1000 mA - 3 WDC

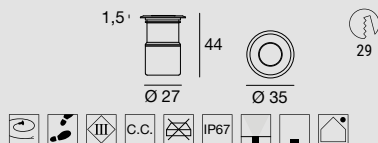

Opt	2W - 3000K 249 lmS - 141 lmD
3W - 3000K	432 lmS - 246 lmD
10°	C01052CHWSP
32°	C01052CHWML
DI	C01052NKWDI
10°	C01052NKWSP
21°	C01052NKWFL
32°	C01052NKWML
57°	C01052NKWWF
DI	C01052ISWDI
10°	C01052ISWSP
21°	C01052ISWFL
32°	C01052ISWML
57°	C01052ISWWF
Opt	2W - 4000K 266 lmS - 150 lmD
3W - 4000K	642 lmS - 264 lmD
26°	C01052NKNML
DI	C01052ISNML

Beret_Q


powerLED | 350 mA | 1 W DC

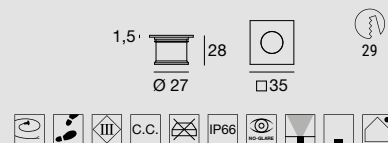

Opt	3000K 154 lmS - 98 lmD
DI	92077W00

Beret_2Q


powerLED | 630 mA 2 W DC | 1000 mA 3 W DC

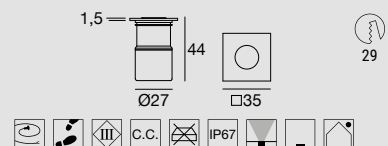

Opt	2W - 3000K 249 lmS - 141 lmD
3W - 3000K	432 lmS - 246 lmD
32°	C01054ISWML

Beret_X Anti-glaring


powerLED | 350 mA | 1 W DC

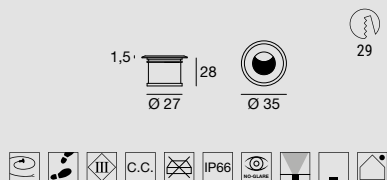

Opt	3000K 154 lmS - 37 lmD
26°	97800W30
26°	97799W30
57°	97799W60

Beret_2R

powerLED | 220-240 V AC | 1,6 W DC - 3 W AC

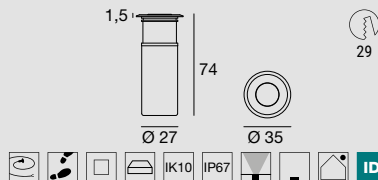

Opt	3000K 249 lmS - 149 lmD
10°	83567W08
26°	83567W30
DI	83567W00








Corps en aluminium avec flasque en acier inoxydable.
Diffuseur en verre trempé extra-clair.

*Aluminium body with stainless steel flange.
Extra-clear tempered glass diffuser.*

Texo_RJ
220-240 V





GU10 1 x 35 W Max Halogen
(LED bulbs compatible)



52901

Texo_QJ
220-240 V



GU10 1 x 35 W Max Halogen
(LED bulbs compatible)



52951

Recessed casings & Accessories

- 52700 Recessed casing Ø152xh180
- 84893 Junction box conn. 2w (p. XXXIV)
- 84894 Junction box conn. 4w (p. XXXIV)








ALCOR



Corps en aluminium.
Diffuseur en verre prismatique trempé.

Aluminium body.
Tempered prismatic glass diffuser.


Alcor_R1 | V2
powerLED | 500 mA | 4,5 W DC



Opt | 3000K 575 lmS - 55 lmD

Radial | **76863W18**


Alcor_R1 | V2
powerLED | 220-240 V AC | 4,5 W DC - 5,6 W AC



Opt | 3000K 575 lmS - 55 lmD

Radial | **76867W18**


Alcor_R1
arrayLED | 350 mA | 6,3 W DC



Opt | 3000K 965 lmS - 76 lmD

Radial | **76690W18**

Alcor_R1 | V2
arrayLED | 220-240 V AC | 6,3 W DC - 8,2 W AC



Opt | 3000K 965 lmS - 76 lmD

Radial | **76694W18**

Electronics

Alcor_R1 V2 Ø70 h65
C-E200007 ON/OFF - 1-2 art. - Ø 35
99185 ON/OFF - 2-4 art.
C-E200003 DALI/PUSH - 2-4 art. - Ø 55



Alcor_R1 Ø120 h112
89421 ON/OFF - 1 art.
C-E200006 ON/OFF - 1-2 art. - Ø 35
C-E200004 DALI/PUSH - 1-2 art. - Ø 55

Recessed casings

Alcor_R1 V2 Ø70 h65
84936 Ø69xh92

Alcor_R1 V2 Ø70 h106
84935 Ø69xh139

Alcor_R1 Ø120 h112 - Alcor_R1 V2 Ø120 h112
98121 Ø110xh155







Corps en acier inoxydable AISI 316L.
Diffuseur en verre trempé.

*AISI 316L stainless steel body.
Tempered glass diffuser.*

ALCOR316

Alcor316_R

powerLED | 500 mA | 1,5 W DC



Opt | 3000K 213 lmS - 40 lmD

Radial | **97353W18**

Opt | 4000K 227 lmS - 43 lmD

Radial | **97353N18**

Alcor316_R1

powerLED | 500 mA | 1,5 W DC



Opt | 3000K 213 lmS - 13 lmD


Radial | **97354W18**

Opt | 4000K 227 lmS - 14 lmD

Radial | **97354N18**

Alcor316_R2

powerLED | 500 mA | 1,5 W DC




Opt | 3000K 213 lmS - 29 lmD

Radial | **97355W18**

Alcor316_R4

powerLED | 500 mA | 1,5 W DC



Opt | 3000K 213 lmS - 57 lmD

Radial | **97356W18**

Alcor316_R

powerLED | 220-240 V AC | 2 W DC - 3 W AC




Opt | 3000K 249 lmS - 40 lmD

Radial | **83558W18**

Alcor316_R2

powerLED | 220-240 V AC | 2 W DC - 3 W AC




Opt | 3000K 249 lmS - 29 lmD

Radial | **83560W18**

Alcor316_R1

arrayLED | 4,5 W DC - 6,3 W AC



Opt | 3000K 673 lmS - 42 lmD

Radial | **C00715SEWRU**

Electronics

Alcor316_R 1,5W - R1 - R2 1,5W - R4

89422 ON/OFF - 1-2 art.

89423 ON/OFF - 2-3 art.

C-E200007 ON/OFF - 3-6 art. - Ø 35

C-E200003 DALI/PUSH - 5-12 art. - Ø 55

Recessed casings

Alcor316_R - R1 - R2 - R4

84918 Ø60xh87

Alcor316_R1 4,5W

84341 Ø110xh155






FOOTPAD



Structure ultra-plate en acier inoxydable AISI 316.
Diffuseur en polycarbonate.

*Ultra-flat AISI 316 stainless steel.
Polycarbonate diffuser.*

Footpad_R | V2
arrayLED | C.C. | 500 mA - 4,5 W DC



Opt | 3000K 673 lmS - 208 lmD
Radial | **77453W00**

Electronics

- C-E200007** ON/OFF - 1-2 art. - ⌀ 35
- 99185** ON/OFF - 2-4 art.
- C-E200003** DALI/PUSH - 2-4 art. - ⌀ 55








ASTROPEK



Corps en aluminium.
Diffuseur en verre trempé.
*Aluminium body.
Tempered glass diffuser.*

Astropek_1
powerLED | 500 mA | 4,5 W DC



Opt | 3000K 575 lmS - 55 lmD
Radial | **C00270GGWRU**


Electronics

- C-E200007** ON/OFF - 1-2 art. - Ⓢ 35
- 99185** ON/OFF - 2-4 art.
- C-E200003** DALI/PUSH - 2-4 art. - Ⓢ 55



OUTDOOR

BUZZER	605
BOND PRO	607
BOND	609
PISTILLO	611
PEAK	613
DIRIGO CUT-OFF	615



BOLLARDS






BUZZER

Corps en aluminium moulé sous pression, peint texturé en noir gris ou marron foncé.


Die-cast aluminium body painted textured black grey or dark brown.



Buzzer Pro
arrayLED | 220-240 V | 7,2 W DC - 8,5 W AC




Opt | 3000K 1087 lmS - 211 lmD
Asy,360° **C00714BGWRD**
Asy,360° **C00714DBWRD**



Opt | 3000K 1087 lmS - 82 lmD
Asy,360° **C00713BGWSR**
Asy,360° **C00713DBWSR**




Buzzer
arrayLED-direct | 220-240 V




L 410 - 10 W AC
Opt | 3000K 1150 lmS - 255 lmD
Asy,360° **76890W00**
Asy,360° **76892W00**

L 710 - 10 W AC
Opt | 3000K 1150 lmS - 255 lmD
Asy,360° **76894W00**
Asy,360° **76896W00**

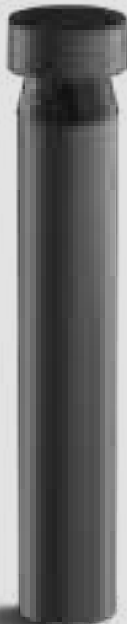

Buzzer | Kit relamping
arrayLED-direct | 220 V AC



7 W AC
Opt | 3000K 805 lmS - 138 lmD
Asy,360° **77187W00**

Accessories

Buzzer Pro
14931 Peg Ø130x300 mm

Buzzer
W-F900001 Fixing tie rods Ø110x258 mm

Finishes ■ Text black grey R7021
■ Dark brown





BOND PRO




Corps en aluminium avec peinture en poudre polyester et traitement de surface protecteur ou en acier inoxydable. Diffuseur en polyéthylène blanc opale.

Polyester powder-coated aluminium body and protective surface treatment or stainless steel body. Opalescent white polyethylene diffuser.




Bond Pro
arrayLED | 220-240 V | 10,8 W DC - 12 W AC



Opt | 3000K 1350 lmS - 580 lmD
Asy,360° **81098W00**
Asy,360° **81099W00**
Asy,360° **81100W00**

Bond Pro
arrayLED | 220-240 V | 10,8 W DC - 12 W AC



L 510
Opt | 3000K 1350 lmS - 580 lmD
Asy,360° **81102W00**
Asy,360° **81103W00**
Asy,360° **81104W00**

L 810
Opt | 3000K 1350 lmS - 580 lmD
Asy,360° **81106W00**
Asy,360° **81107W00**
Asy,360° **81108W00**

Accessories

14931 Peg Ø130x300 mm

Finishes ■ Text black R9005 ■ Stainless steel
■ Dark brown





Tête de mât en polycarbonate noir. Diffuseur en polyéthylène.
Support de mât en Bayblend® noir.


*Pole head in black polycarbonate.
Polyethylene diffuser. Black Bayblend® pole support.*



Bond_Head
topLED CRI 80 | 220-240 V
11 W DC - 12 W AC

101 |  | 54


Ø 197 | 



Opt | 2700K 1256 lmS - 921 lmD
DI | **8660M**

Opt | 3000K 1350 lmS - 970 lmD
DI | **8660**


Bond
topLED CRI 80 | 220-240 V
11 W DC - 12 W AC



Opt | 2700K 1256 lmS - 921 lmD
DI | **8663M**

Opt | 3000K 1350 lmS - 970 lmD
DI | **8663**


Bond
topLED CRI 80 | 220-240 V
11 W DC - 12 W AC



Opt | 2700K 1256 lmS - 921 lmD
DI | **8666M**

Opt | 3000K 1350 lmS - 970 lmD
DI | **8666**

Bond
topLED CRI 80 | 220-240 V
11 W DC - 12 W AC



Opt | 2700K 1256 lmS - 921 lmD
DI | **8669M**


Opt | 3000K 1350 lmS - 970 lmD
DI | **8669**

Accessories



Bond_Head 8660M - 8660
KIT0083 Connector IP68 kit

Kit IP68 included (1x) 8663 - 8666 - 8669

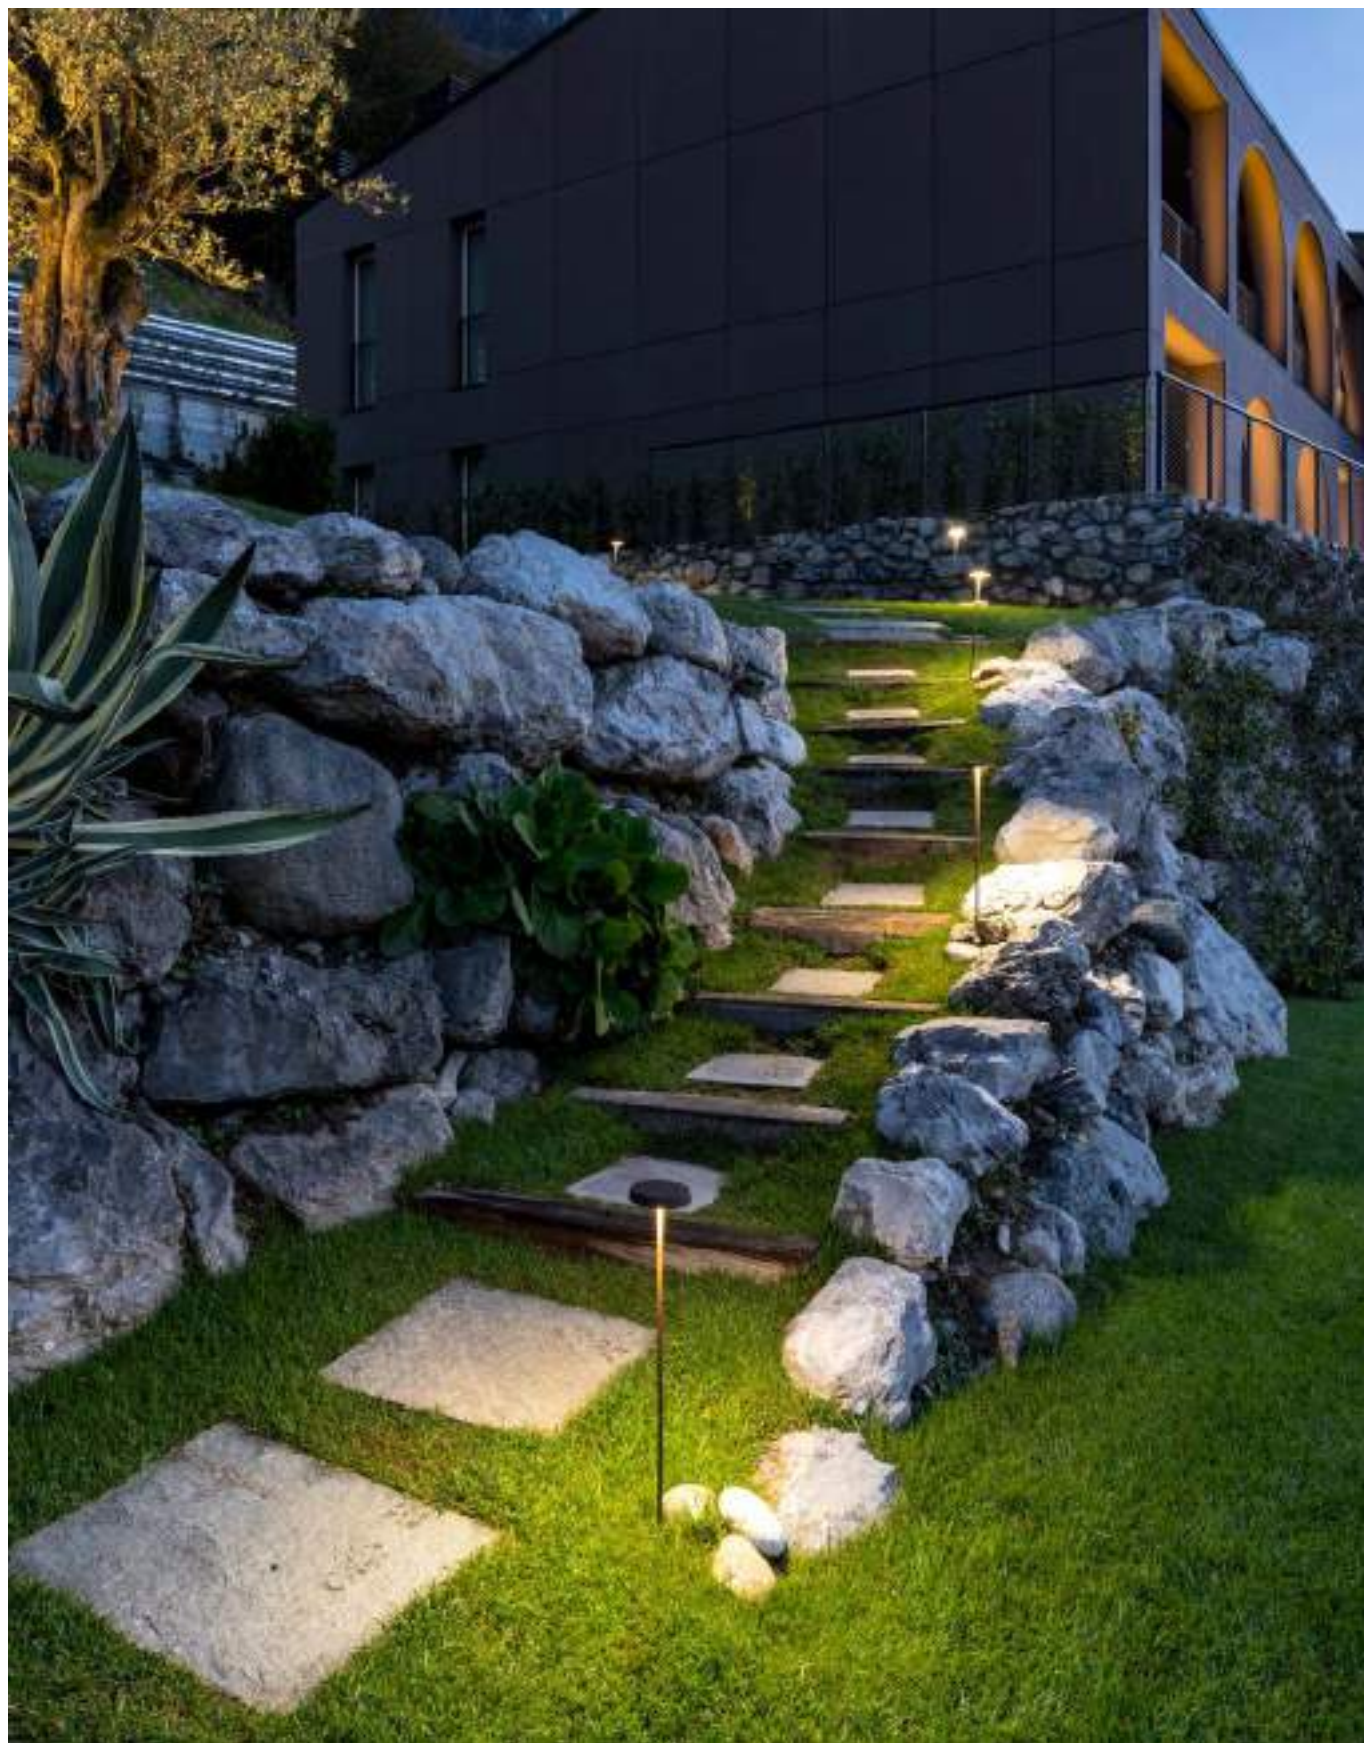





Corps en métal peint texturé noir ou marron foncé. Tête en aluminium.
Diffuseur en résine polyuréthane blanche.

Body in black or dark brown textured painted metal.
Aluminium head. Diffuser in white polyurethane resin.

PISTILLO

Pistillo

topLED CRI 80 | 24 V DC | 4 W DC





Opt	2700K 350 lmS - 247 lmD
DI	8940M
DI	8943M

Opt	3000K 375 lmS - 266 lmD
DI	8940
DI	8943

Pistillo

topLED CRI 80 | 24 V DC | 4 W DC





Opt	2700K 350 lmS - 247 lmD
DI	8941M
DI	8944M

Opt	3000K 375 lmS - 266 lmD
DI	8941
DI	8944

Pistillo

topLED CRI 80 | 24 V DC | 4 W DC





Opt	2700K 350 lmS - 247 lmD
DI	8942M
DI	8945M

Opt	3000K 375 lmS - 266 lmD
DI	8942
DI	8945

Pistillo

topLED CRI 80 | 24 V DC | 4 W DC




Opt	2700K 350 lmS - 247 lmD
DI	8946M
DI	8947M

Opt	3000K 375 lmS - 266 lmD
DI	8946
DI	8947

Pistillo

topLED CRI 80 | 24 V DC | 4 W DC



Opt	2700K 350 lmS - 247 lmD
DI	8948M
DI	8949M

Opt	3000K 375 lmS - 266 lmD
DI	8948
DI	8949

Finishes ■ Text black R9005
■ Dark Brown

Electronics

KIT0018	ON/OFF Driver 24V (1-2 art.)
KIT0116	ON/OFF Driver 24V (1-6 art.)

Accessories

14992	Connector IP68 kit
KIT77	Peg 114x66 L204 mm





PEAK





Corps en aluminium peint texturé noir gris ou marron foncé.
Diffuseur en verre transparent extra-clair.

*Body in black grey or dark brown textured painted
aluminium. Extra-clear glass diffuser.*

Peak

arrayLED | 220-240 V AC



L 350 - 6,5 W DC - 9 W AC

Opt 3000K 990 lmS - 620 lmD

Asy.Ww 64795W07

Asy.Ww 64796W07

L 710 - 10 W AC



Opt 3000K 1320 lmS - 826 lmD

Asy.Ww 64792W07

Asy.Ww 64793W07

Peak

arrayLED | 220-240 V AC



9,5 W DC - 11 W AC

Opt 3000K 1320 lmS - 914 lmD

Asy.Ww 64789W07

Asy.Ww 64790W07


Accessories

65082 Fixing tie rods 88x88 L260 mm



Finishes ■ Text black grey R7021
■ Dark brown

PU_C Plus | 140 LED/m
topLED CRI 90 | 24 V DC | 7,2 W/m

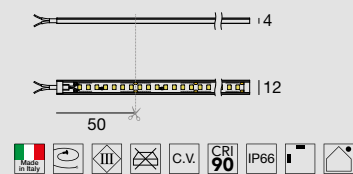

Opt	2700K 3780 lmS - 3780 lmD
DI	C0034MDI05019
Opt	3000K 4010 lmS - 4010 lmD
DI	C0034WDI05019
Opt	4000K 4568 lmS - 4568 lmD
DI	C0034NDI05019

Electronics

PU_C Plus	
99374	ON/OFF - 75 W - Φ 56
99331	ON/OFF - 150 W - Φ 70
99332	0/1-10V - 150 W - Φ 70
83333	DALI/PUSH - 150 W - Φ 77
C-E400002	DALI/PUSH - 240 W - Φ 77



Profilé en aluminium peint texturé
gris foncé, gris, marron foncé.

Profile in dark grey, grey, dark brown
textured painted aluminium profile.

DIRIGO CUT-OFF




Dirigo_CUT-OFF
Linear profile




		L mm
	C-K400070	1010
	C-K400071	1010
	C-K400072	1010
	C-K400073	2010
	C-K400074	2010
	C-K400075	2010

Dirigo_CUT-OFF
IN-corner




	C-K400064	1 x
	C-K400065	1 x
	C-K400066	1 x

Dirigo_CUT-OFF
End caps




	C-K400058	1 x
	C-K400059	1 x
	C-K400060	1 x

Dirigo_CUT-OFF
Joining element



	C-K400061	1 x
	C-K400062	1 x
	C-K400063	1 x


Dirigo_CUT-OFF
OUT-corner



	C-K400067	1 x
	C-K400068	1 x
	C-K400069	1 x

OUTDOOR

OH!	619
OH! MARS	623
OH! SMASH	625
ROLLING SKY LANTERN	627
ROLLING SKY	629
BUTLER	633
LIRA	635
MARGE	637



FLOOR








Diffuseur en polyéthylène.
Base en polycarbonate blanc.

Polyethylene diffuser.
White polycarbonate base.

OH!

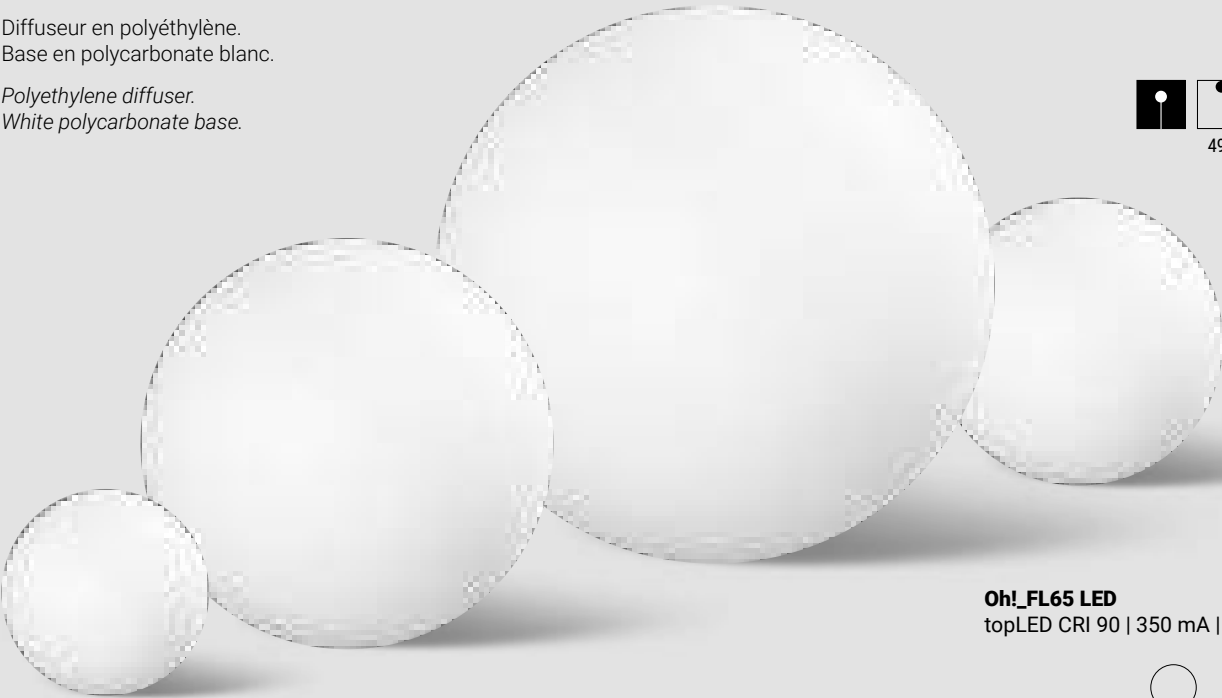


Oh!_FL65 LED
topLED CRI 90 | 350 mA | 7 W DC




Opt | 3000K 1022 lms - 848 lmD
DI | **16190**

Oh!_FL65 LED
topLED CRI 90 | 220-240 V
13 W DC - 15 W AC




Opt | 3000K 1930 lms - 1588 lmD
DI | **16191**

Oh!_FL65 LED
topLED CRI 90 | 220-240 V
18 W DC - 20 W AC



Opt | 3000K 2748 lms - 2115 lmD
DI | **16192**

Oh!_FL65 LED
topLED CRI 90 | 220-240 V
26 W DC - 27 W AC



Opt | 3000K 3835 lms - 2856 lmD
DI | **16193**

Electronics

Oh!_FL65 LED Ø280
KIT0066 ON/OFF Driver (1-3 art.)

Recessed casings & Accessories

Oh!_FL65 LED Ø280
14930 Recessed casing Ø110xh220
14931 Peg Ø130x300 mm

Oh!_FL65 LED Ø380
14992 IP68 kit
14930 Recessed casing Ø110xh220
14931 Peg Ø130x300 mm
14080 Anti-theft brackets (ground mount)

Oh!_FL65 LED Ø550
14992 IP68 kit
14930 Recessed casing Ø110xh220
14931 Peg Ø130x300 mm
14081 Anti-theft brackets (ground mount)

Oh!_FL65 LED Ø740
14992 IP68 kit
14930 Recessed casing Ø110xh220
14937 Peg Ø130x500 mm
14082 Anti-theft brackets (ground mount)

Finishes ☐ Natural polyethylene




Diffuseur en polyéthylène.
Base en polycarbonate blanc.


Polyethylene diffuser.
White polycarbonate base.




OH!



491 519 IN

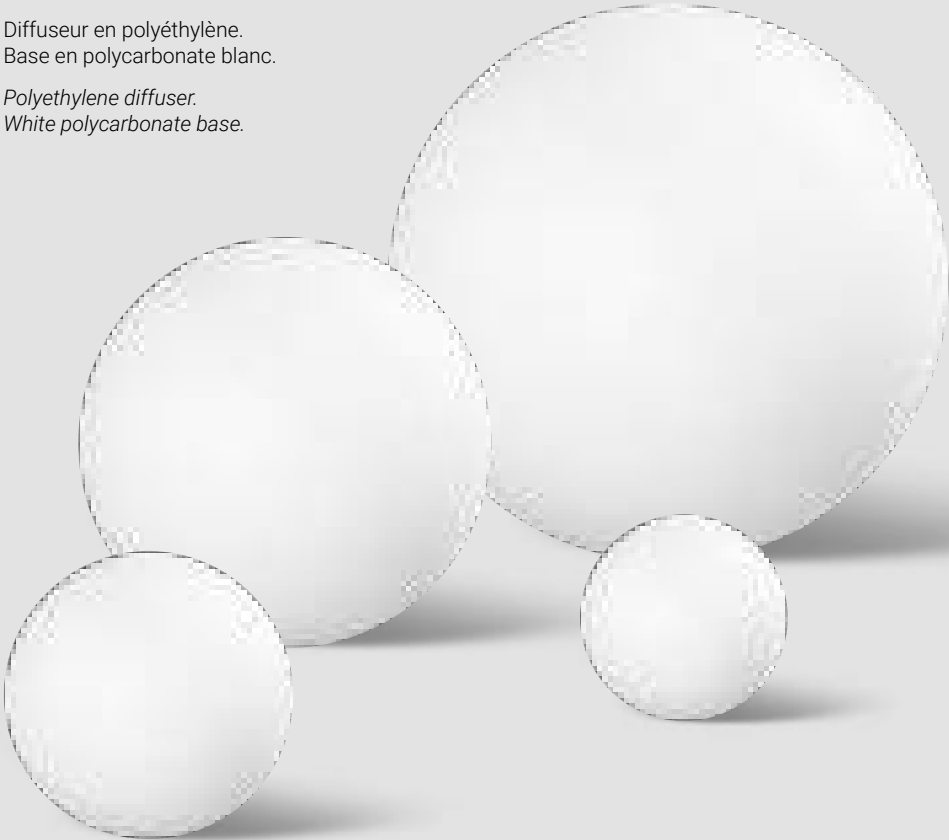


Oh!_FL65 E27
220-240 V




E27 1 x 30 W Max Halogen
(LED/FLUORESCENT bulbs
compatible)
16150

Oh!_FL65 E27
220-240 V





E27 1 x 46 W Max Halogen
(LED/FLUORESCENT bulbs
compatible)
16160

Oh!_FL65 E27
220-240 V



E27 1 x 46 W Max Halogen
(LED/FLUORESCENT bulbs
compatible)
16162

Oh!_FL65 E27
220-240 V



E27 1 x 46 W Max Halogen
(LED/FLUORESCENT bulbs
compatible)
16164

Recessed casings & Accessories

Oh!_FL65 E27 Ø280	
14992	IP68 kit
14930	Recessed casing Ø110xh220
14931	Peg Ø130x300 mm
Oh!_FL65 E27 Ø380	
14992	IP68 kit
14930	Recessed casing Ø110xh220
14931	Peg Ø130x300 mm
14080	Anti-theft brackets (ground mount)

Oh!_FL65 E27 Ø550	
14992	IP68 kit
14930	Recessed casing Ø110xh220
14931	Peg Ø130x300 mm
14081	Anti-theft brackets (ground mount)
Oh!_FL65 E27 Ø740	
14992	IP68 kit
14930	Recessed casing Ø110xh220
14937	Peg Ø130x500 mm
14082	Anti-theft brackets (ground mount)






Diffuseur en polyéthylène teinté orange sable.
Base en polycarbonate blanc.

*Sand orange coloured polyethylene diffuser.
White polycarbonate base.*

OH! MARS

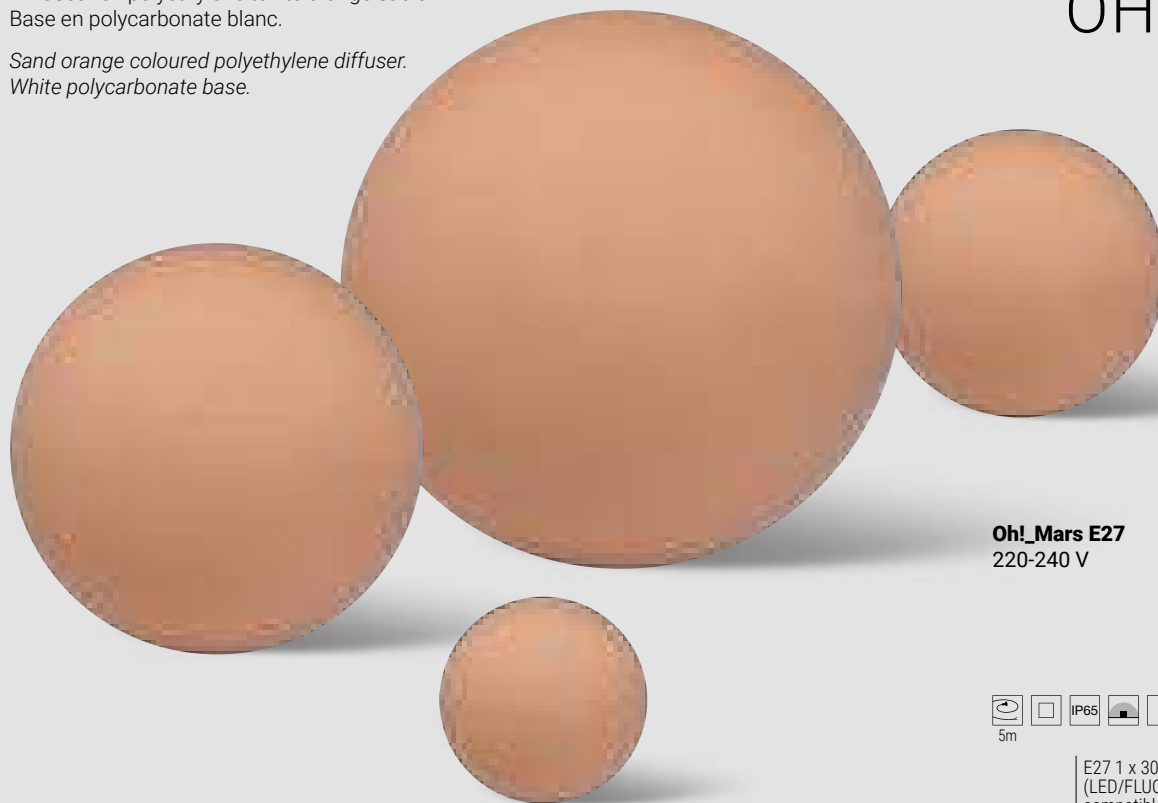

Oh!_Mars E27
220-240 V



E27 1 x 30 W Max Halogen
(LED/FLUORESCENT bulbs
compatible)
16130

Oh!_Mars E27
220-240 V




E27 1 x 46 W Max Halogen
(LED/FLUORESCENT bulbs
compatible)
16131

Oh!_Mars E27
220-240 V



E27 1 x 46 W Max Halogen
(LED/FLUORESCENT bulbs
compatible)
16132

Oh!_Mars E27
220-240 V



E27 1 x 46 W Max Halogen
(LED/FLUORESCENT bulbs
compatible)
16133

Recessed casings & Accessories

Oh!_Mars E27 Ø280
14992 IP68 kit
14930 Recessed casing Ø110xh220
14931 Peg Ø130x300 mm

Oh!_Mars E27 Ø380
14992 IP68 kit
14930 Recessed casing Ø110xh220
14931 Peg Ø130x300 mm
14080 Anti-theft brackets (ground mount)

Oh!_Mars E27 Ø550
14992 IP68 kit
14930 Recessed casing Ø110xh220
14931 Peg Ø130x300 mm
14081 Anti-theft brackets (ground mount)

Oh!_Mars E27 Ø740
14992 IP68 kit
14930 Recessed casing Ø110xh220
14937 Peg Ø130x500 mm
14082 Anti-theft brackets (ground mount)









Diffuseur en polyéthylène.
Base en polycarbonate blanc.

*Polyethylene diffuser.
White polycarbonate base.*

OH! SMASH

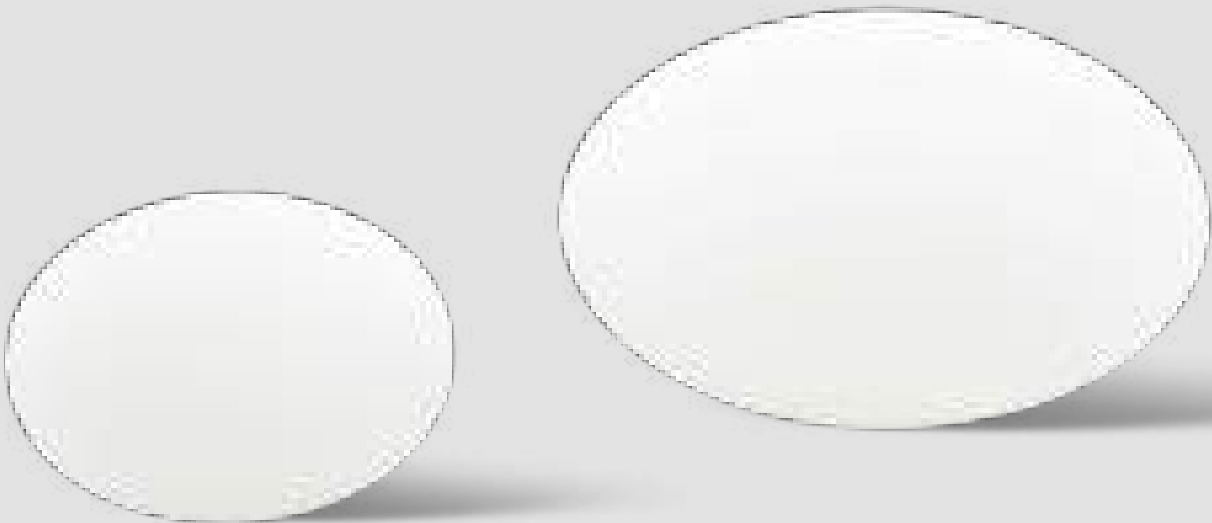


Oh! Smash_FL65
220-240 V | E27



E27 1 x 30 W Max Halogen
(LED bulbs compatible)
16215

Oh! Smash_FL65
220-240 V | E27



E27 1 x 46 W Max Halogen
(LED bulbs compatible)
16218

Recessed casings & Accessories

- 14930** Recessed casing Ø110xh220
- 14931** Peg Ø130x300 mm





Corps en PVC et aluminium peint texturé en noir ou noir/marron foncé. Diffuseur en polyméthacrylate de méthyle.



Textured black or black/dark brown painted PVC and aluminium body. Polymethylmethacrylate diffuser.

ROLLING SKY LANTERN



Rolling Sky Lantern

topLED CRI 90 | 220-240 V AC
9 W DC - 10 W AC





Opt | 2700K 1316 lmS - 300 lmD
 ■ Asy. 360° CA117ABBMDI
 ■ Asy. 360° CA117ADBMDI

Opt | 3000K 1385 lmS - 322 lmD
 ■ Asy. 360° CA117ABBWDI
 ■ Asy. 360° CA117ADBWDI

Rolling Sky Lantern

topLED CRI 90 | 220-240 V AC
15 W DC - 17 W AC





Opt | 2700K 1987 lmS - 470 lmD
 ■ Asy. 360° CA118ABBMDI
 ■ Asy. 360° CA118ADBMDI

Opt | 3000K 2136 lmS - 505 lmD
 ■ Asy. 360° CA118ABBWDI
 ■ Asy. 360° CA118ADBWDI

Rolling Sky Lantern

topLED CRI 90 | 220-240 V AC
20 W DC - 22 W AC



Opt | 2700K 2643 lmS - 547 lmD
 ■ Asy. 360° CA119ABBMDI
 ■ Asy. 360° CA119ADBMDI

Opt | 3000K 2842 lmS - 588 lmD
 ■ Asy. 360° CA119ABBWDI
 ■ Asy. 360° CA119ADBWDI

Finishes ■ Text black R9005
 ■ Dark brown/Text black R9005





Corps en PVC et aluminium peint texturé en noir ou noir/marron foncé. Diffuseur en polyméthacrylate de méthyle.



Textured black or black/dark brown painted PVC and aluminium body. Polymethylmethacrylate diffuser.

ROLLING SKY



Rolling Sky

topLED CRI 90 | 220-240 V AC
9 W DC - 10 W AC




Opt | 2700K 1316 lmS - 300 lmD
Asy. 360° **77099M00**
Asy. 360° **77100M00**

Opt | 3000K 1385 lmS - 322 lmD
Asy. 360° **77099W00**
Asy. 360° **77100W00**



Rolling Sky

topLED CRI 90 | 220-240 V AC
15 W DC - 17 W AC




Opt | 2700K 1987 lmS - 470 lmD
Asy. 360° **77101M00**
Asy. 360° **77102M00**

Opt | 3000K 2136 lmS - 505 lmD
Asy. 360° **77101W00**
Asy. 360° **77102W00**

Rolling Sky

Sphere





C-D100001 A=300 | B=300 | C=139
C-D100002 A=400 | B=395 | C=179
C-D100003 A=500 | B=495 | C=219



Rolling Sky

topLED CRI 90 | 220-240 V AC
20 W DC - 22 W AC




Opt | 2700K 2643 lmS - 547 lmD
Asy. 360° **77103M00**
Asy. 360° **77104M00**

Opt | 3000K 2842 lmS - 588 lmD
Asy. 360° **77103W00**
Asy. 360° **77104W00**

Rolling Sky

Amphora



C-D100004 A=290 | B=295 | C=139
C-D100005 A=383 | B=397 | C=179
C-D100006 A=490 | B=495 | C=219

Accessories

14931 Peg Ø130x300 mm

Finishes Text black R9005 Transparent PMMA

Dark brown/Text black R9005









BUTLER



Corps en métal peint texturé en noir.
Diffuseur en polyéthylène.

*Black textured painted metal body.
Polyethylene diffuser.*


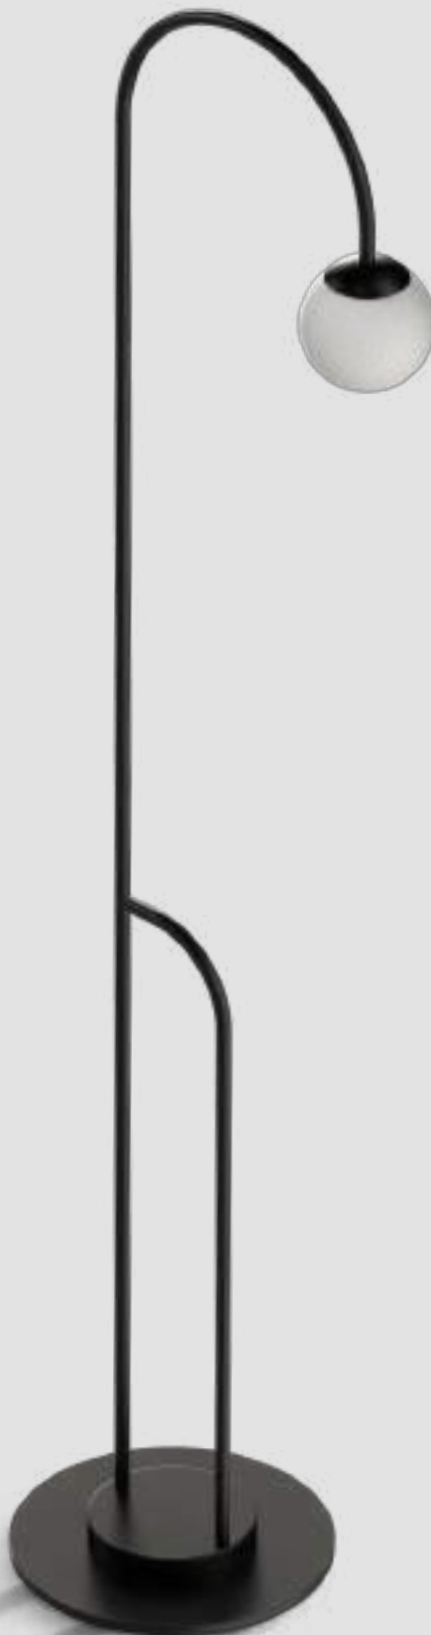


Table avec crochet pour sac à main (achetable séparément).

Table with handbag hook (purchasable separately).

Butler

topLED CRI 85 | 220-240 V
3 W DC - 4 W AC



2,3m

Opt | 3000K 836 lmS - 677 lmD
DI | 9095


Accessories

KIT9095 Table with handbag hook





LIRA





Tête, tige et base en aluminium peint texturé en noir ou marron foncé.
Diffuseur en résine polyuréthane blanche.

*Head, stem and base in black or dark brown textured painted aluminium.
Diffuser in white polyurethane resin.*



Lira_FL
topLED CRI 80 | 220-240 V
24 W DC - 29 W AC



Opt	3000K 3924 lmS - 1402 lmD
DI	9320
DI	9321

Finishes

	Dark brown
	Text black R9005






MARGE





Diffuseur en polyéthylène.
Base en polycarbonate blanc.

*Polyethylene diffuser.
White polycarbonate base.*

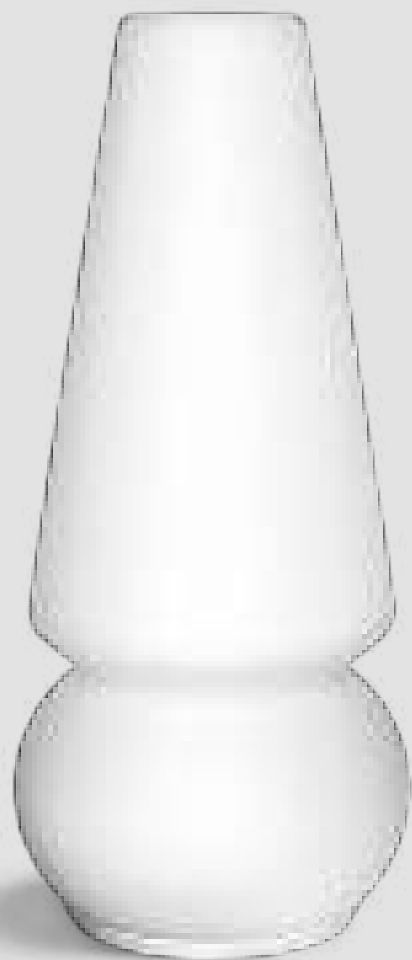


Marge_FL65 RGB LED
topLED CRI 80 | 24 V DC | 36 W DC



Opt | RGB
DI | **16000**

Marge_FL65 E27
220-240 V



E27 4 x 46 W Max Halogen
(LED/FLUORESCENT bulbs
compatible)
16001



- 15 fixed colours
- white colour
- 5 brightness levels
- 16 continuous cycle programs
- 68 colors automatic cycle
- possibility to operate multiple lamps with 1 remote without no sync

Electronics

Marge_FL65 RGB LED
14958 KIT Driver RGB + Remote control

Accessories

Marge_FL65 RGB LED - Marge_FL65 E27
14937 Peg Ø130x500 mm
10013 Weight
10015 Anti-theft brackets (ground mount)

Marge_FL65 E27
14991 IP68 - 3 pole terminal set

Finishes ☐ White polyurethane



OUTDOOR

ALIX

641

MAXI TUBE

643



INDUSTRIAL





ALIX





Corps en polycarbonate avec protection UV.

Body in polycarbonate with UV protection.



Alix
topLED CRI 80 | 220-240 V AC



L 1240 - 30 W AC

Opt 4000K 3900 lmS - 3659 lmD

DI C00908GGNDI

L 1640 - 47 W AC

Opt 4000K 6100 lmS - 5505 lmD

DI C00909GGNDI

Accessories included


Steel clip bracket for dual installation, hanging or surface mounted (chains not included).



Finishes

- Text brilliant grey R9006
- Stainless steel

Alix Pro
topLED CRI 80 | 220-240 V AC



L 1213 - 32 W AC

Opt 4000K 4000 lmS - On req

DI C00910GGNDI

DALI - 32 W AC

Opt 4000K 4000 lmS - On req

DI C00911GGNDI

L 1493 - 51 W AC

Opt 4000K 6000 lmS - On req

DI C00912GGNDI





MAXI TUBE






Diffuseur en polycarbonate avec protection UV.
Câbles en néoprène.

*Diffuser in polycarbonate with UV protection.
Neoprene cables.*



Maxi Tube
topLED CRI 90 | 220-240 V AC
20 W DC - 22 W AC

Maxi Tube
topLED CRI 90 | 220-240 V AC
37 W DC - 40,5 W AC



Opt | 4000K 2478 lmS - 2022 lmD
128x125 92443N12

Opt | 4000K 4248 lmS - 3431 lmD
128x125 92444N12

Accessories



99226 Fixing kit with nickel-plated steel clips. Two fixing kits are required for installation.



99227 Fixing kit with nickel-plated steel clips and connector. Two fixing kits are required for installation.



98695 Fixing kit with safety lock. Two fixing kits are required for installation.



C-F100017 Suspension fixing system with 2000 mm steel cable. Two fixing kits are required for installation.




99229 Extension cable in neoprene 2x1 mm² ON-OFF.



98729 Quick connector IP68 socket/plug. 2 poles ON-OFF.

OUTDOOR

MK68	647
SUB	649
RUBBER	651



UNDERWATER






MK68




Corps en acier inoxydable AISI 316L.

AISI 316L stainless steel body.

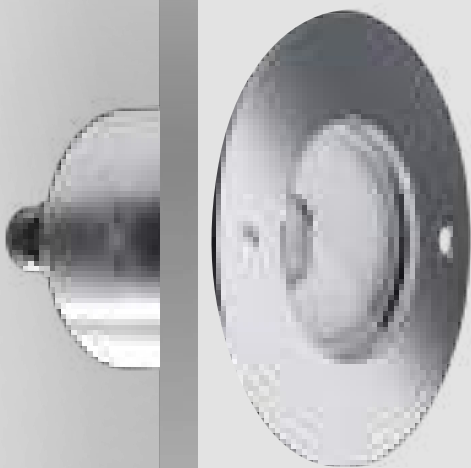

MK68_RF
powerLED | 12 V DC | 4,5 W DC



Cable 2 m	
Opt	3000K 575 lmS - 473 lmD
21°	84031W20
41°	84031W40

The light fixture can only be installed underwater.

Electronics

83010	ON/OFF - 1-12 art. - ⌀ 54
83013	ON/OFF - 1-32 art. - ⌀ 74
83012	DALI - 1-12 art. - ⌀ 29
83015	DALI - 1-25 art. - ⌀ 29


Recessed casings

83140	Recessed casing IP68 for tiles or mosaics Ø106xh145
--------------	---






Corps en acier inoxydable AISI 316L.
AISI 316L stainless steel body.

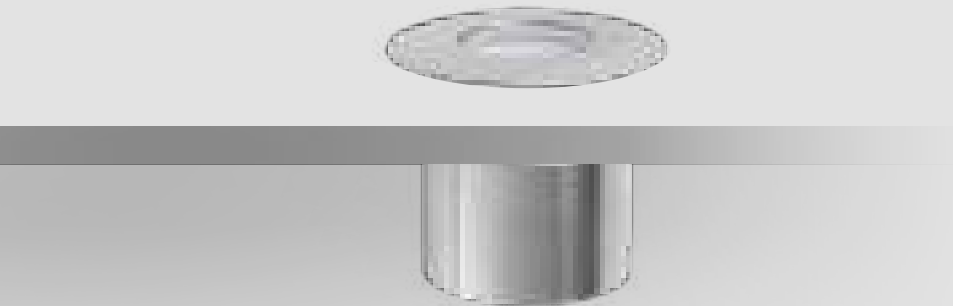

Sub_R
powerLED | 500 mA | 1,5 W DC



Opt	3000K 213 lmS - 161 lmD
21°	97315W15
27°	97315W30
61°	97315W60
DI	97315W00

Opt	4000K 227 lmS - 171 lmD
27°	97315N30

Electronics

89422	ON/OFF - 1-12 art.
89423	ON/OFF - 2-3 art.
C-E200007	ON/OFF - 3-6 art. - Ø 35
C-E200003	DALI/PUSH - 5-12 art. - Ø 55

Recessed casings

98148	Ø75xh93 - IP68
98060	Ø70xh54








RUBBER




Corps en technopolymère blanc.
White technopolymer body.

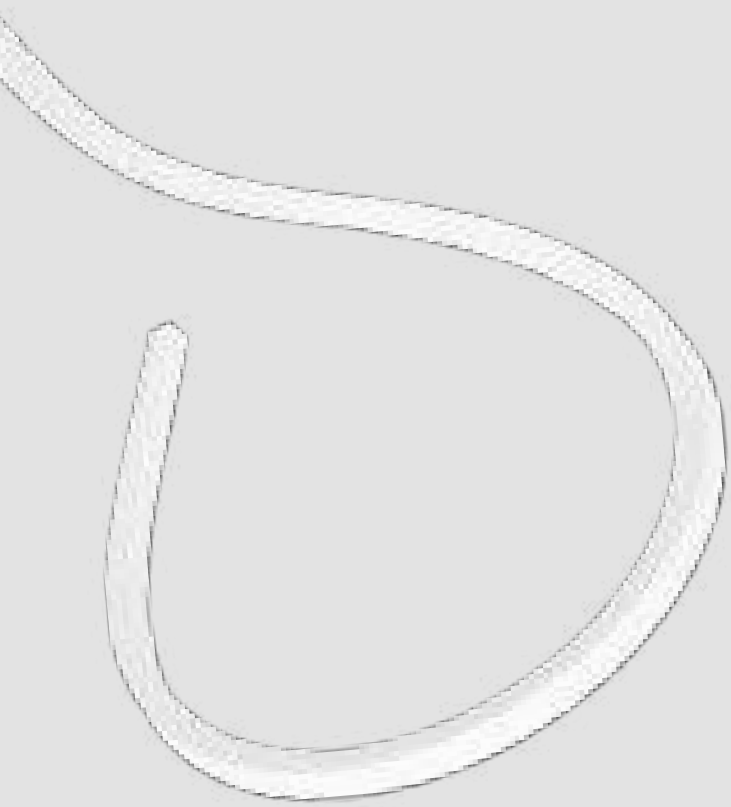

Rubber 3D PROtection | V3 | LED strip CRI 90 | 24 V DC



9,6 W/m			
Opt			
☐ DI	C0012MDI01004	Im S/m - Im D/m	L
☐ DI	C0012MDI05004	998 - On req	(1 m - 10 W)
☐ DI	C0012MDI10004	998 - On req	(5 m - 50 W)
☐ DI	C0012MDI10004	998 - On req	(10 m - 100 W)
☐ DI	C0012WDI01004	1096 - On req	(1 m - 10 W)
☐ DI	C0012WDI05004	1096 - On req	(5 m - 50 W)
☐ DI	C0012WDI10004	1096 - On req	(10 m - 100 W)



15 W/m			
Opt			
☐ DI	C0012VDI01004	Im S - Im D	L
☐ DI	C0012VDI05004	RBGW (3000 K)	(1 m - 15 W)
☐ DI	C0012VDI05004	RBGW (3000 K)	(5 m - 75 W)

Pour l'alimentation/l'unité de contrôle, contacter le service d'assistance Linea Light.
For power supply/control contact Linea Light support service.

Electronics

24 V DC Mono Color
99374 ON/OFF - 75W - Φ 56
99331 ON/OFF - 150W - Φ 70
99332 0/1-10V - 150W - Φ 70
83333 DALI/PUSH - 150W - Φ 77
C-E400002 DALI/PUSH - 240W - Φ 77

24 V DC RGBW
Dimmer RF + RF remote - Φ 53
C-E700002 + C-W600001
99331 CV 24V 150W - Φ 70
C-E700005 Dimmer DMX - Φ 60
DMX Controllers pag. XXIX
99331 CV 24V 150W - Φ 70

Accessories
pages 652-653

Finishes ☐ Smooth white


Cct M 2700 W 3000 V RGBW

Accessories


Linear profile




Clip




Recessed casing + cable gland



Rubber preparation kit

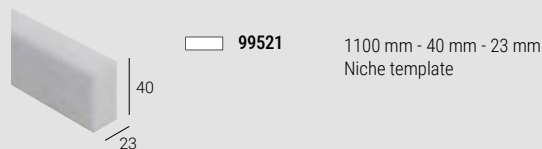


Rubber preparation kit

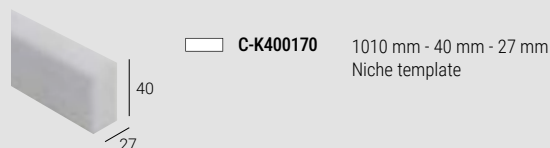


Linear profile with cable run



Clip with cable run





Rubber profile drilling template

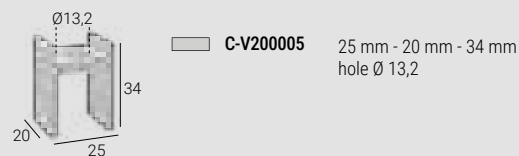

Accessory for corrugated preparation



Accessory for corrugated preparation or C-C300001

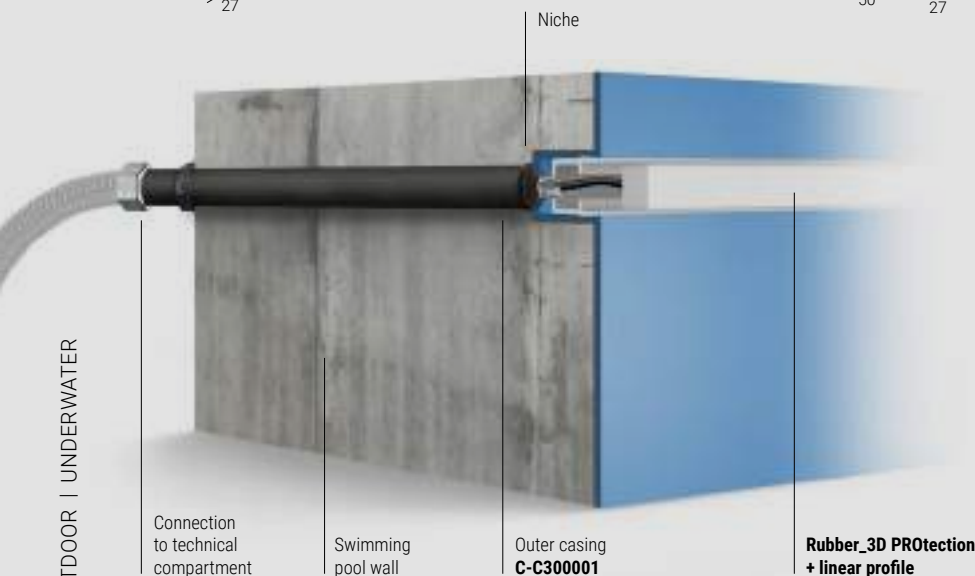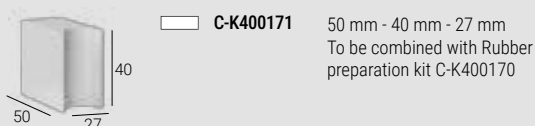

ASA: Acrylonitrile Styrene
Acrylate (thermoplastic material)

Finishes ☐ Text white R9003
☐ Anodised aluminium

Accessories

Connector 2 ways



90
Ø14

PVC **98990**

1000 mm - 18 mm - 19 mm
2000 mm - 18 mm - 19 mm

suitable for: Rubber 3D PROtection (not suitable RGBW)

Connector



44
85

PVC **89548**

IP68 with GEL
max. 4x1,5 mm²

suitable for: Rubber 3D PROtection (not suitable RGBW)

Connector 2 ways C-W300001



Connector 2 ways



155
Ø55

PVC **C-W300001**

1000 mm - 39 mm - 19 mm
2000 mm - 39 mm - 19 mm

suitable for: Rubber 3D PROtectionRGBW

Double-sided tape



PVC **99520**

33 m

suitable for: Rubber 3D PROtection



RIBBON	657
SILICONE	663
PU_C PLUS	665
PROFILES	671
RUBBER	675
RUBBER_O	685



FLEX LIGHTS & PROFILES





Corps en technopolymère blanc.


White technopolymer body.

RIBBON




IP20

Ribbon | 60 LED/m | topLED CRI 90 | 24 V DC | 4,8 W/m

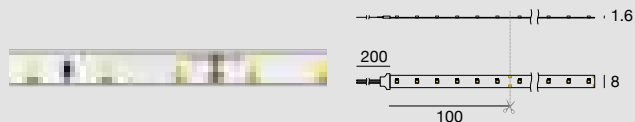

Opt		Im S - Im D	L
DI	C0033MDI05000	2331 - 2331	(5 m - 24 W)
DI	C0033WDI05000	2457 - 2457	
DI	C0033NDI05000	2612 - 2612	

Ribbon | 120 LED/m | topLED CRI 90 | 24 V DC | 9,6 W/m




Opt		Im S - Im D	L
DI	C0036MDI05000	4662 - 4662	(5 m - 48 W)
DI	C0036WDI05000	5057 - 5057	
DI	C0036NDI05000	5247 - 5247	

Ribbon | V2 | 168 LED/m | topLED CRI 90 | 24 V DC | 4,8 W/m




Opt		Im S - Im D	L
DI	C0064MDI05000	2575 - 2575	(5 m - 24 W)
DI	C0064WDI05000	2689 - 2689	
DI	C0064NDI05000	2883 - 2883	

Ribbon | 168 LED/m | topLED CRI 90 | 24 V DC | 14,4 W/m



Opt		Im S - Im D	L
DI	C0041MDI05000	7725 - 7725	(5 m - 72 W)
DI	C0041WDI05000	8067 - 8067	
DI	C0041NDI05000	8650 - 8650	

Ribbon | 238 LED/m | topLED CRI 90 | 24 V DC | 19,6 W/m

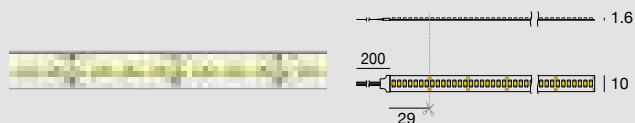

Opt		Im S - Im D	L
DI	C0042MDI05000	10628 - 10628	(5 m - 98 W)
DI	C0042WDI05000	11080 - 11080	
DI	C0042NDI05000	11750 - 11750	

Ribbon | 160 LED/m | topLED CRI 85 | 24 V DC | 12 W/m



Opt		Im S - Im D	L
DI	C0043MDI05000	7339 - 7339	(5 m - 60 W)
DI	C0043WDI05000	7689 - 7689	
DI	C0043NDI05000	8200 - 8200	

Ribbon | 160 LED/m | topLED CRI 85 | 24 V DC | 21,6 W/m



Opt		Im S - Im D	L
DI	C0044MDI05000	13838 - 13838	(5 m - 108 W)
DI	C0044WDI05000	14506 - 14506	
DI	C0044NDI05000	15187 - 15187	

Electronics

99374	ON/OFF - 75W - Ø 56
99331	ON/OFF - 150W - Ø 70
99332	0/1-10V - 150W - Ø 70
83333	DALI/PUSH - 150W - Ø 77
C-E400002	DALI/PUSH - 240W - Ø 77

Cables and connectors

page 667


Linear profiles

pages 668 to 673

Finishes ☐ Smooth white

Cct M 2700 W 3000 N 4000


Ribbon | 160 LED/m | topLED CRI 95 | 24 V DC | 12 W/m

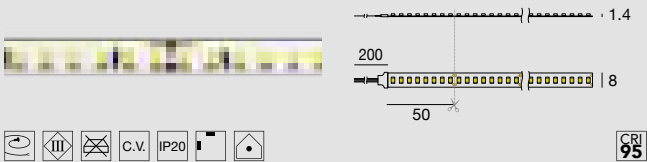

CRI 95

Opt		Im S - Im D	L
DI	C0045MDI05000	6394 - 6394	(5 m - 60 W)
DI	C0045WDI05000	6982 - 6982	
DI	C0045NDI05000	7174 - 7174	


Ribbon | 160 LED/m | topLED CRI 95 | 24 V DC | 21,6 W/m



CRI 95

Opt		Im S - Im D	L
DI	C0046MDI05000	11403 - 11403	(5 m - 108 W)
DI	C0046WDI05000	11705 - 11705	
DI	C0046NDI05000	12643 - 12643	



Ribbon | Slim | 120 LED/m | topLED CRI 90 | 24 V DC | 9,6 W/m

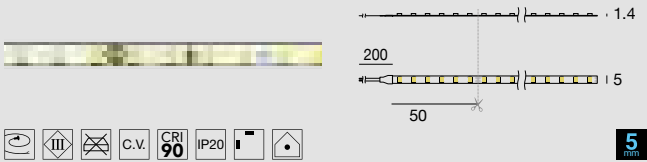

5 mm

Opt		Im S - Im D	L
DI	C0047MDI05000	4029 - 4029	(5 m - 48 W)
DI	C0047WDI05000	4214 - 4214	
DI	C0047NDI05000	4653 - 4653	



Ribbon | Slim | 160 LED/m | topLED CRI 90 | 24 V DC | 10,5 W/m

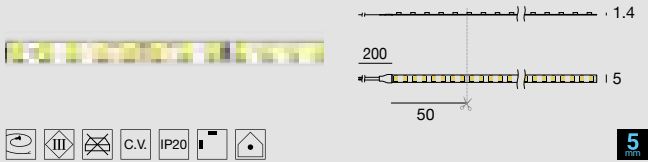

5 mm

Opt		Im S - Im D	L
DI	C0048MDI05000	5661 - 5661	(5 m - 52,5 W)
DI	C0048WDI05000	6048 - 6048	
DI	C0048NDI05000	6632 - 6632	



Ribbon | 130 LED/m | topLED CRI 90 | 48 V DC | 9,6 W/m

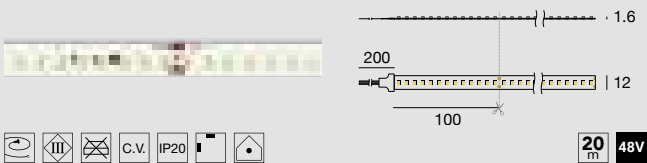

20 m 48V

Opt		Im S - Im D	L
DI	C0049MDI20000	19862 - 19862	(20 m - 192 W)
DI	C0049WDI20000	20812 - 20812	
DI	C0049NDI20000	21647 - 21647	

Ribbon | 130 LED/m | topLED CRI 90 | 48 V DC | 13,8 W/m

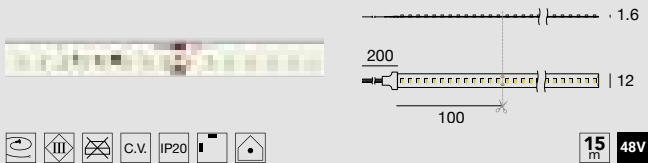

15 m 48V

Opt		Im S - Im D	L
DI	C0050MDI15000	20868 - 20868	(15 m - 207 W)
DI	C0050WDI15000	21688 - 21688	
DI	C0050NDI15000	23132 - 23132	

Electronics

Ribbon 160 LED/m - Ribbon Slim
99374 ON/OFF - 75W - Φ 56
99331 ON/OFF - 150W - Φ 70
99332 0/1-10V - 150W - Φ 70
83333 DALI/PUSH - 150W - Φ 77
C-E400002 DALI/PUSH - 240W - Φ 77

Ribbon 130 LED/m
99784 ON/OFF - 150W CV 48V - Φ 80
99785 ON/OFF - 240W CV 48V - Φ 81
C-E400003 DALI/PUSH - 150W CV 48V - Φ 77
Switching CV 48V (pag. XII-XIII)
83177 Dimmer DMX 312W

Cables and connectors
page 667

Linear profiles
pages 668 to 673



Corps en technopolymère blanc.

White technopolymer body.

RIBBON




IP20

Ribbon Plus | 70 LED/m | topLED CRI 90 | 24 V DC | 4,8 W/m




Opt		Im S - Im D	L
☐ DI	C0021MDI05000	2522 - 2522	(5 m - 24 W)
☐ DI	C0021WDI05000	2712 - 2712	
☐ DI	C0021NDI05000	2880 - 2880	

Ribbon Plus | 70 LED/m | topLED CRI 90 | 24 V DC | 9,6 W/m




Opt		Im S - Im D	L
☐ DI	C0027MDI05000	5580 - 5580	(5 m - 48 W)
☐ DI	C0027WDI05000	5750 - 5750	
☐ DI	C0027NDI05000	6300 - 6300	

Ribbon Plus | 140 LED/m | topLED CRI 90 | 24 V DC | 9,6 W/m



Opt		Im S - Im D	L
☐ DI	C0022MDI05000	5610 - 5610	(5 m - 48 W)
☐ DI	C0022WDI05000	5880 - 5880	
☐ DI	C0022NDI05000	6260 - 6260	

Ribbon Plus | 140 LED/m | topLED CRI 90 | 24 V DC | 14,4 W/m



Opt		Im S - Im D	L
☐ DI	C0029MDI05000	8810 - 8810	(5 m - 72 W)
☐ DI	C0029WDI05000	9350 - 9350	
☐ DI	C0029NDI05000	10110 - 10110	

Ribbon Plus | 140 LED/m | topLED CRI 90 | 24 V DC | 19,2 W/m



Opt		Im S - Im D	L
☐ DI	C0039MDI05000	11110 - 11110	(5 m - 96 W)
☐ DI	C0039WDI05000	11530 - 11530	
☐ DI	C0039NDI05000	12010 - 12010	

Electronics

99374	ON/OFF - 75W - Ø 56
99331	ON/OFF - 150W - Ø 70
99332	0/1-10V - 150W - Ø 70
83333	DALI/PUSH - 150W - Ø 77
C-E400002	DALI/PUSH - 240W - Ø 77

Cables and connectors

page 667

Linear profiles

pages 668 to 673

Finishes ☐ Smooth white

Cct **M** 2700 **W** 3000 **N** 4000

Ribbon Plus RGBW | 60+60 LED/m | topLED CRI 90 | 24 V DC | 19,2 W/m



Opt	Im S - Im D	L
DI	C0027VDI05000	RGBW (3000 K) (5 m - 96 W)

Ribbon Plus WT | 70+70 LED/m | topLED CRI 90 | 24 V DC | 13 W/m



Opt	Im S - Im D	L
DI	C0027SDI05000	Warm tune 1800-3000 K (5 m - 65 W)

Ribbon Plus DW | 70+70 LED/m | topLED CRI 90 | 24 V DC | 12,5 W/m




Opt	Im S - Im D	L
DI	C0027DDI05000	Dynamic White 1800-4000 K (5 m - 62,5 W)

WT Warm Tune

La technologie Warm Tune™ rappelle l'effet nostalgique des lampes à incandescence : lorsque l'intensité diminue, la lumière devient plus chaude et plus douce, jusqu'à atteindre l'effet bougie.

Warm Tune rekindles lovely memories of the incandescence lamps: the light becomes progressively warmer and dimmer as the intensity reduces until reaches the candle effect.

Ribbon | cobLED CRI 90 | 24 V DC | 10 W/m

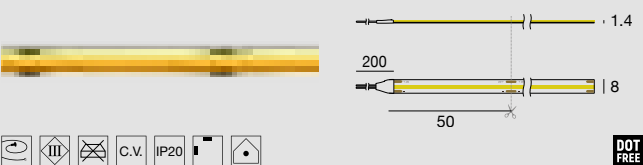

Opt	Im S - Im D	L
DI	C0037MDI05000	4779 - 4779 (5 m - 50 W)
DI	C0037WDI05000	4892 - 4892
DI	C0037NDI05000	5690 - 5690

Electronics

Ribbon Plus RGBW / WT / DW
Dimmer RF + RF Remote - Ø 53
C-E700002 + C-W600001
99331 CV 24V 150W - Ø 70

C-E700005 Dimmer DMX - Ø 60
DMX Controllers pag. XXIX
99331 CV 24V 150W - Ø 70

Ribbon cobLED
99374 ON/OFF - 75W - Ø 56
99331 ON/OFF - 150W - Ø 70
99332 0/1-10V - 150W - Ø 70
83333 DALI/PUSH - 150W - Ø 77
C-E400002 DALI/PUSH - 240W - Ø 77

Cables and connectors
page 667

Linear profiles
pages 668 to 673



Corps en technopolymère blanc.


White technopolymer body.

RIBBON




IP20

Ribbon PRO | 80 LED/m | topLED CRI 90 | 24 V DC | 3,6 W/m




Opt		Im S - Im D	L
☐ DI	C0023MDI05000	2558 - 2558	(5 m - 18 W)
☐ DI	C0023WDI05000	2590 - 2590	
☐ DI	C0023NDI05000	2754 - 2754	

Ribbon PRO | 128 LED/m | topLED CRI 90 | 24 V DC | 6,7 W/m

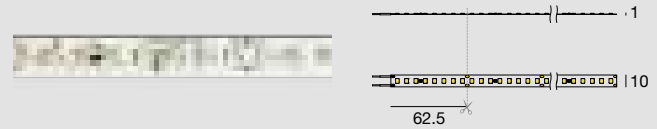


Opt		Im S - Im D	L
☐ DI	C0024MDI05000	4638 - 4638	(5 m - 33,5 W)
☐ DI	C0024WDI05000	4791 - 4791	
☐ DI	C0024NDI05000	5115 - 5115	

Ribbon PRO | 80 LED/m | topLED CRI 90 | 24 V DC | 9,6 W/m



Opt		Im S - Im D	L
☐ DI	C0028MDI05000	6835 - 6835	(5 m - 48 W)
☐ DI	C0028WDI05000	7088 - 7088	
☐ DI	C0028NDI05000	7519 - 7519	

Ribbon PRO | 128 LED/m | topLED CRI 90 | 24 V DC | 13,6 W/m

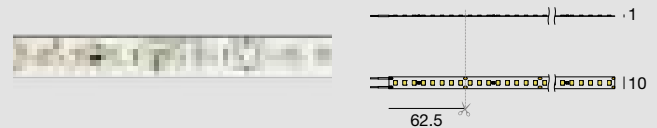


Opt		Im S - Im D	L
☐ DI	C0030MDI05000	9447 - 9447	(5 m - 68 W)
☐ DI	C0030WDI05000	9806 - 9806	
☐ DI	C0030NDI05000	10489 - 10489	

Ribbon PRO | 160 LED/m | topLED CRI 90 | 24 V DC | 16,8 W/m



Opt		Im S - Im D	L
☐ DI	C0031MDI05000	11857 - 11857	(5 m - 84 W)
☐ DI	C0031WDI05000	12098 - 12098	
☐ DI	C0031NDI05000	13013 - 13013	

Ribbon PRO | 136 LED/m | topLED CRI 90 | 48 V DC | 8,6 W/m

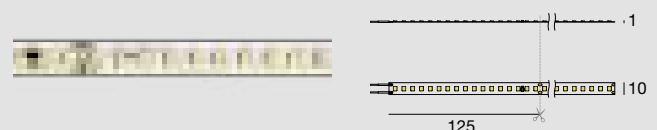

48V

Opt		Im S - Im D	L
☐ DI	C0040MDI05000	6482 - 6482	(5 m - 43 W)
☐ DI	C0040WDI05000	7519 - 7519	
☐ DI	C0040NDI05000	7792 - 7792	

Electronics

99374	ON/OFF - 75W - Ø 56
99331	ON/OFF - 150W - Ø 70
99332	0/1-10V - 150W - Ø 70
83333	DALI/PUSH - 150W - Ø 77
C-E400002	DALI/PUSH - 240W - Ø 77

Cables and connectors

page 667

Linear profiles

pages 668 to 673

Finishes ☐ Smooth white

Cct M 2700 W 3000 N 4000





Corps en technopolymère blanc.

White technopolymer body.

SILICONE




IP67

Silicone | 60 LED/m | topLED CRI 90 | 24 V DC | 4,8 W/m



Opt		Im S - Im D	L
DI	C0051MDI05019	1996 - 1996	(5 m - 24 W)
DI	C0051WDI05019	2077 - 2077	
DI	C0051NDI05019	2189 - 2189	

Silicone | 120 LED/m | topLED CRI 90 | 24 V DC | 9,6 W/m




Opt		Im S - Im D	L
DI	C0052MDI05019	4040 - 4040	(5 m - 48 W)
DI	C0052WDI05019	4323 - 4323	
DI	C0052NDI05019	4490 - 4490	

Silicone | V2 | 168 LED/m | topLED CRI 90 | 24 V DC | 4,8 W/m




Opt		Im S - Im D	L
DI	C0065MDI05019	2262 - 2262	(5 m - 24 W)
DI	C0065WDI05019	2375 - 2375	
DI	C0065NDI05019	2396 - 2396	

Silicone | 168 LED/m | topLED CRI 90 | 24 V DC | 14,4 W/m




Opt		Im S - Im D	L
DI	C0053MDI05019	6786 - 6786	(5 m - 72 W)
DI	C0053WDI05019	7127 - 7127	
DI	C0053NDI05019	7189 - 7189	

Silicone | 160 LED/m | topLED CRI 85 | 24 V DC | 12 W/m



Opt		Im S - Im D	L
DI	C0054MDI05019	7320 - 7320	(5 m - 60 W)
DI	C0054WDI05019	7782 - 7782	
DI	C0054NDI05019	8266 - 8266	

Silicone | 130 LED/m | topLED CRI 90 | 48 V DC | 13,8 W/m



15 m 48V

Opt		Im S - Im D	L
DI	C0055MDI15030	18596 - 18596	(15 m - 207 W)
DI	C0055WDI15030	19796 - 19796	
DI	C0055NDI15030	21440 - 21440	

Electronics

Silicone 60 - 120 - 168 - 160 LED/m
99374 ON/OFF - 75W - Φ 56
99331 ON/OFF - 150W - Φ 70
99332 0/1-10V - 150W - Φ 70
83333 DALI/PUSH - 150W - Φ 77
C-E400002 DALI/PUSH - 240W - Φ 77

Silicone 130 LED/m
99784 ON/OFF - 150W CV 48V - Φ 80
99785 ON/OFF - 240W CV 48V - Φ 81
C-E400003 DALI/PUSH - 150W CV 48V - Φ 77
Switching CV 48V (pag. XII-XIII)
83177 Dimmer DMX 312W

Accessories

89223 10 x brackets
 20 x M3x25 screws
C-V400002 1 x glue
 10 x caps

Finishes ☐ Smooth white

Cct **M** 2700 **W** 3000 **N** 4000





Corps en technopolymère blanc.


White technopolymer body.

PU_C PLUS





IP66

PU_C Plus | 70 LED/m | topLED CRI 90 | 24 V DC | 3,2 W/m

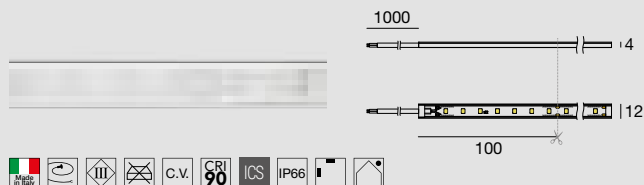


Opt		Im S - Im D	L
☐ DI	C0018MDI05019	1424 - 1424	(5 m - 16 W)
☐ DI	C0018WDI05019	1550 - 1550	
☐ DI	C0018NDI05019	1628 - 1628	

PU_C Plus | 140 LED/m | topLED CRI 90 | 24 V DC | 7,2 W/m

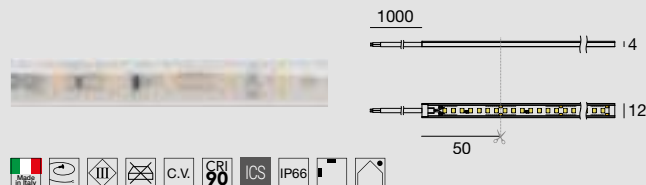



Opt		Im S - Im D	L
☐ DI	C0019MDI05019	3040 - 3040	(5 m - 36 W)
☐ DI	C0019WDI05019	3314 - 3314	
☐ DI	C0019NDI05019	3458 - 3458	

PU_C Plus | 70 LED/m | topLED CRI 90 | 24 V DC | 12,5 W/m

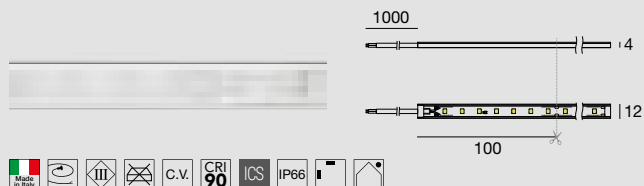


Opt		Im S - Im D	L
☐ DI	C0025MDI05019	5941 - 5941	(5 m - 62,5 W)
☐ DI	C0025WDI05019	6334 - 6334	
☐ DI	C0025NDI05019	6873 - 6873	

PU_C Plus | 140 LED/m | topLED CRI 90 | 24 V DC | 25 W/m

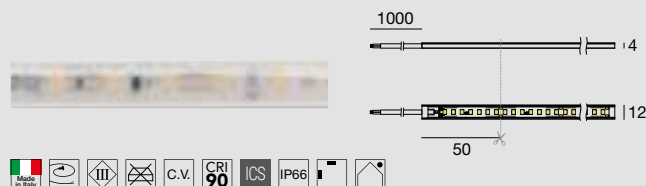

Opt		Im S - Im D	L
☐ DI	C0026MDI05019	11942 - 11942	(5 m - 125 W)
☐ DI	C0026WDI05019	11731 - 11731	
☐ DI	C0026NDI05019	12264 - 12264	

PU_C Plus RGBW | 60+60 LED/m | topLED CRI 90 | 24 V DC | 19,2 W/m

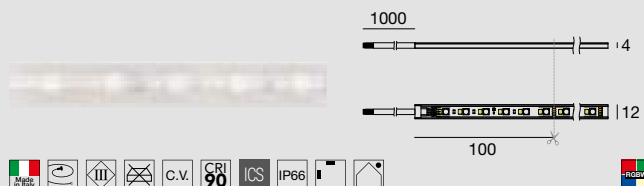

Opt		Im S - Im D	L
☐ DI	C0025VDI05019	RBGW (3000 K)	(5 m - 96 W)

Electronics

Ribbon cobLED

99374	ON/OFF - 75W - Φ 56
99331	ON/OFF - 150W - Φ 70
99332	0/1-10V - 150W - Φ 70
83333	DALI/PUSH - 150W - Φ 77
C-E400002	DALI/PUSH - 240W - Φ 77

Ribbon Plus RGBW / WT / DW

	Dimmer RF + RF Remote - Φ 53
C-E700002	+ C-W600001
99331	CV 24V 150W - Φ 70

C-E700005	Dimmer DMX - Φ 60
DMX	Controllers pag. XXIX
99331	CV 24V 150W - Φ 70

Accessories

☐ 89223	10 x brackets
	20 x M3x25 screws
☐ 98964	1 x glue
	20 x brackets
	40 x M3x25 screws
	10 x caps


Finishes ☐ Smooth white

Cct M 2700 W 3000 N 4000 V RGBW




Cables and connectors

Ribbon Plus 70, 140 LED/m Ribbon 60, 120, 160 LED/m



83396


Strip-strip connector 8mm
Connector: 2 poles
Protection: IP20



83397


Cable-strip connector 8mm
Connector: 2 poles
Protection: IP20

Ribbon Plus Dynamic White



83400


Strip-strip connector 10mm
Connector: 3 poles
Protection: IP20



83401


Cable-strip connector 10mm
Connector: 3 poles
Protection: IP20

Ribbon 168, 238 LED/m



C-W400001


Strip-strip connector 10mm
Connector: 2 poles
Protection: IP20



C-W400002


Cable-strip connector 10mm
Connector: 2 poles
Protection: IP20

Ribbon Pro 80,128, 136, 160 LED/m - Ribbon Plus Warm Tune - Ribbon 160 LED/m



83398


Strip-strip connector 10mm
Connector: 2 poles
Protection: IP20



83399


Cable-strip connector 10mm
Connector: 2 poles
Protection: IP20

Ribbon Plus RGBW



83402


Strip-strip connector 10mm
Connector: 5 poles
Protection: IP20



83403

Cable-strip connector 10mm
Connector: 5 poles
Protection: IP20

Ribbon Cob




C-W400003

Strip-strip or cable-strip
connector 8mm Cob
Connector: 2 poles
Protection: IP20
(cables not included)

PROFILE RANGE


SURFACE

Svik_00/00 Alise_10/10 Fonis_06/11 Rive_17/16 Vojo_17/08

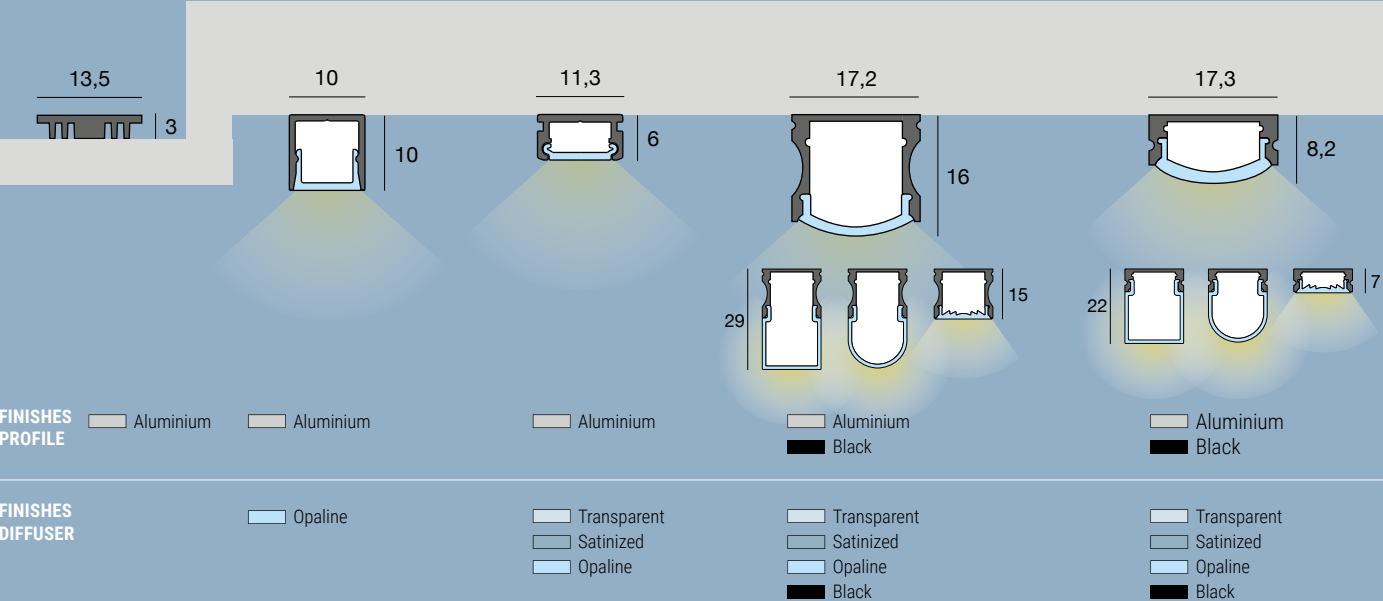

RECESSED

TILES BRICKS WOOD
Tabulo_35/14 Armita_58/15 Roko_33/15

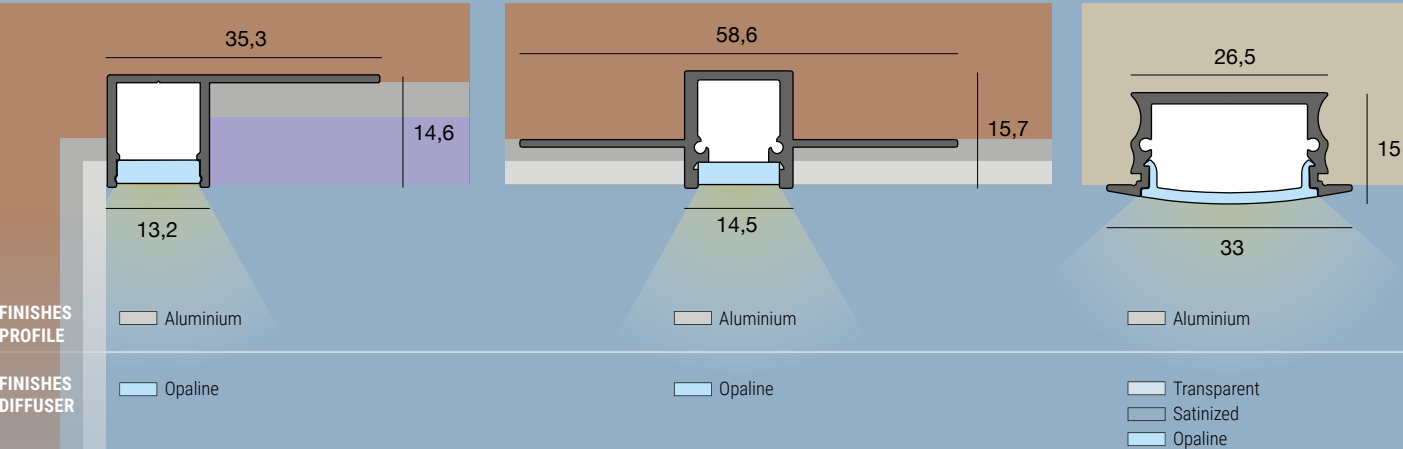


Vojo_17/08

Ozner_25/10

Luno_20/27


Luno_20/27

Cela_18/18




Aluminium

Satinized




Aluminium

Transparent




Aluminium
Black

Opaline
Black



Aluminium
Black

Opaline
Black




Aluminium
Black

Transparent
Satinized
Opaline
Black

Sageto_24/08


PLASTERBOARD
Ghost_64/14

Rialt_55/70




Aluminium

Transparent
Satinized
Opaline

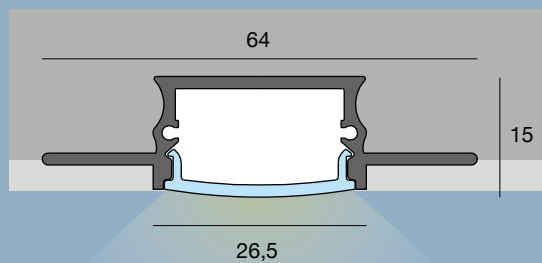

Aluminium

Transparent
Satinized
Opaline

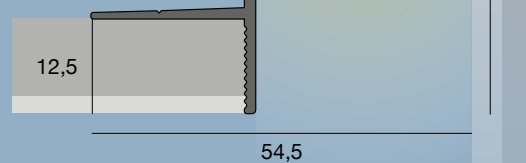


Aluminium

Opaline



Profilé en aluminium.
Aluminium profile.

Vojo_17/08 | Low surface profile

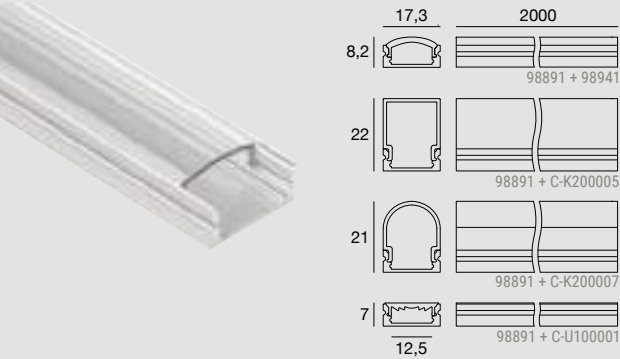

	98891	1 x Profile
	83129	1 x Profile
	98941	1 x Diffuser
	98942	1 x Diffuser
	98943	1 x Diffuser
	83132	1 x Diffuser
	C-U100001	1 x Diffuser (Optic 30/50°)
	C-K200005	1 x Diffuser 3D square
	C-K200007	1 x Diffuser 3D round
	98892	2 x Caps
	83133	2 x Caps
	C-V400023	2 x Caps (for diffuser optic 30/50°)
	C-V400024	2 x Caps (for diffuser optic 30/50°)
	C-V400027	2 x Caps (for diffuser 3D square)
	C-V400029	2 x Caps (for diffuser 3D round)
	98944	5 x Brackets

KIT composition

| 98954 1 x 98891-98943-98892-98944

KIT composition Black

| 84446 1 x 83129-83132-83133-9894

Compatible with: Ribbon PRO - Ribbon Plus - Ribbon (not for 48V) -Silicone (only 10mm)

Vojo_17/08 | Low surface profile




	98891	1 x Profile
	98925	1 x Diffuser (Optic 90°)
	98928	2 x Caps
	98944	5 x Brackets

KIT composition

| 99983 1 x 98891-98925-98928-98944

Compatible with: Ribbon PRO - Ribbon Plus - Ribbon (not for 48V) -Silicone (only 10mm)

Luno_20/27 | High square surface profile

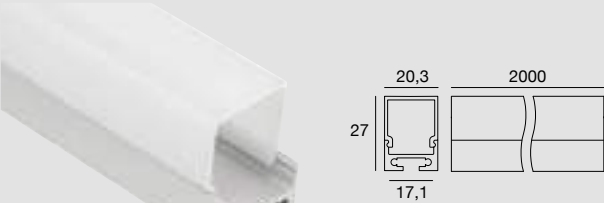

	C-K100017	1 x Profile
	C-K100018	1 x Profile
	C-K200001	1 x Diffuser
	C-K200002	1 x Diffuser
	C-V400019	2 x Caps
	C-V400020	2 x Caps
	98931	5 x Brackets

Compatible with: Ribbon PRO - Ribbon Plus - Ribbon - PU_C Plus - Silicone


Luno_20/27 | High round surface profile



	C-K100017	1 x Profile
	C-K100018	1 x Profile
	C-K200003	1 x Diffuser
	C-K200004	1 x Diffuser
	C-V400021	2 x Caps
	C-V400022	2 x Caps
	98931	5 x Brackets

Compatible with: Ribbon PRO - Ribbon Plus - Ribbon - PU_C Plus - Silicone

Rive_17/16 | High surface profile

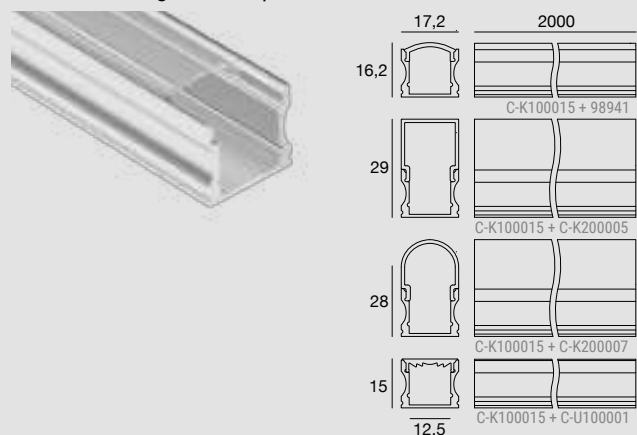

	C-K100015	1 x Profile
	C-K100016	1 x Profile
	98941	1 x Diffuser
	98942	1 x Diffuser
	98943	1 x Diffuser
	83132	1 x Diffuser
	C-U100001	1 x Diffuser (Optic 30/50°)
	C-K200005	1 x Diffuser 3D square
	C-K200007	1 x Diffuser 3D round
	C-V400035	2 x Caps
	C-V400036	2 x Caps
	C-V400025	2 x Caps (for diffuser optic 30/50°)
	C-V400026	2 x Caps (for diffuser optic 30/50°)
	C-V400031	2 x Caps (for diffuser 3D square)
	C-V400033	2 x Caps (for diffuser 3D round)
	98944	5 x Brackets

KIT composition


C-K100026 1 x C-K100015-98943- C-V400035- 98944

KIT composition Black

C-K100027 1 x C-K100016-83132- C-V400036- 98944

Compatible with: Ribbon PRO - Ribbon Plus - Ribbon (not for 48V) - Silicone (only 10mm)

Sageto_24/08 | Low recessed profile

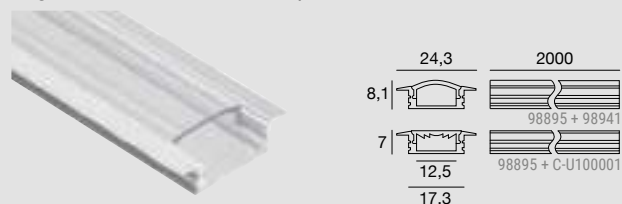

	98895	1 x Profile
	98941	1 x Diffuser
	98942	1 x Diffuser
	98943	1 x Diffuser
	C-U100001	1 x Diffuser (Optic 30/50°)
	98896	2 x Caps
	C-V400023	2 x Caps (for diffuser optic 30/50°)
	98944	5 x Brackets

KIT composition

98965 1 x 98895-98943-98896-98944

Compatible with: Ribbon PRO - Ribbon Plus - Ribbon (not for 48V)


Roko_33/15 | Low recessed profile



	98897	1 x Profile
	98898	1 x Diffuser
	98899	1 x Diffuser
	98900	1 x Diffuser
	98902	2 x Caps
	98901	5 x Brackets

Compatible with: Ribbon PRO - Ribbon Plus - Ribbon - PU_C Plus - Silicone

Ghost_64/14 | Low recessed profile

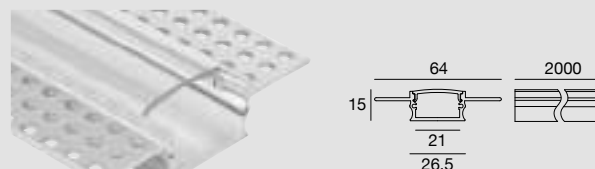

	98906	1 x Profile
	98898	1 x Diffuser
	98899	1 x Diffuser
	98900	1 x Diffuser
	98907	2 x Caps

Compatible with: Ribbon PRO - Ribbon Plus - Ribbon - PU_C Plus - Silicone

Armita_58/15 | Integrated linear profile




	98916	1 x Profile
	98917	1 x Diffuser
	98918	2 x Caps

Compatible with: Ribbon PRO - Ribbon Plus - Ribbon (not for 48V) - Silicone (only 10mm)

Tabulo_35/14 | Integrated side profile


	98921	1 x Profile
	98917	1 x Diffuser
	98922	2 x Caps

Compatible with: Ribbon PRO - Ribbon Plus - Ribbon (not for 48V)

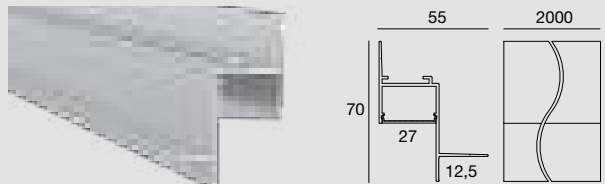Rialt_55/70 | Integrated side profile

	C-K100025	1 x Profile
	C-K200009	1 x Diffuser
	C-V400041	2 x Caps

Compatible with: Ribbon PRO - Ribbon Plus - Ribbon - PU_C Plus - Silicone

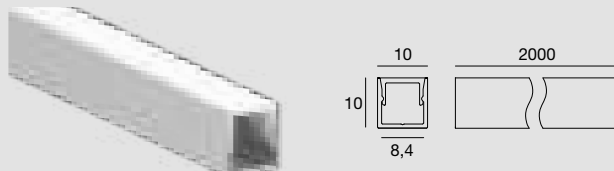Alise_10/10 | Square slim surface profile

	98912	1 x Profile
	98913	1 x Diffuser (Optic 90°)
	98915	2 x Caps
	98914	5 x Brackets

Compatible with: Ribbon Slim

Svik_00/00 | Heat sink

	98956	1 x Heat sink
--	--------------	---------------

Compatible with: Ribbon Pro - Ribbon Plus - Ribbon - PU_C Plus - Silicone (not for 48V)

PROFILES

**Fonis_06/11** | Low slim surface profile

	98885	1 x Profile
	98886	1 x Diffuser
	98887	1 x Diffuser
	98888	1 x Diffuser
	98890	2 x Caps
	83224	5 x Brackets

Compatible with: Ribbon Slim

Ozner_25/10 | Low surface profile

	98419	1 x Profile
	98395	1 x Diffuser
	98418	2 x Caps
	98420	5 x Brackets

Compatible with: Ribbon Pro - Ribbon Plus - Ribbon - PU_C Plus - Silicone

Cela_18/18 | Corner profile

	C-K100019	1 x Profile
	C-K100020	1 x Profile
	98941	1 x Diffuser
	98942	1 x Diffuser
	98943	1 x Diffuser
	83132	1 x Diffuser
	C-V400037	2 x Caps
	C-V400038	2 x Caps
	98904	5 x Brackets

KIT composition

| **C-K100028** 1 x C-K100019-98943- C-V400037 -98904

KIT composition Black

| **C-K100029** 1 x C-K100020-83132- C-V400038 -98904

Compatible with: Ribbon PRO - Ribbon Plus - Ribbon (not for 48V) - Silicone (only 10mm)

Finishes	Smooth black	Transparent	Opaline
	Anodised aluminium	Satinized	Brushed steel







Corps en technopolymère blanc.

White technopolymer body.

RUBBER





Rubber 2D_mini | V3 | LED strip CRI 90 | 24 V DC | 6W/m

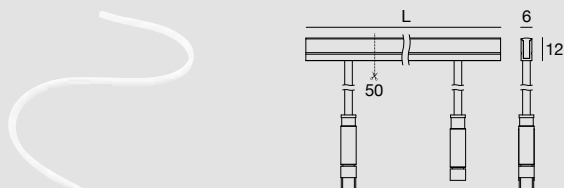

Opt		Im S - Im D	L
☐ DI	C0057MDI05004	624 - On req	(5 m - 30 W)
☐ DI	C0057MDI10004	624 - On req	(10 m - 60 W)
☐ DI	C0057WDI05004	685 - On req	(5 m - 30 W)
☐ DI	C0057WDI10004	685 - On req	(10 m - 60 W)

Rubber 3D | V3 | LED strip CRI 90 | 24 V DC

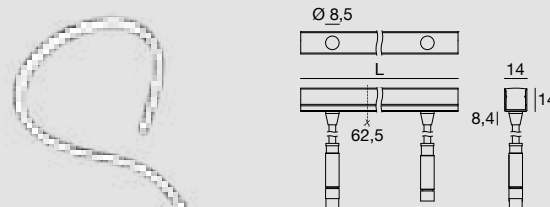

5 W/m	Opt	Im S - Im D	L
☐ DI	C0013MDI01004	499 - On req	(1 m - 5 W)
☐ DI	C0013MDI05004	499 - On req	(5 m - 25 W)
☐ DI	C0013MDI10004	499 - On req	(10 m - 50 W)
☐ DI	C0013WDI01004	530 - On req	(1 m - 5 W)
☐ DI	C0013WDI05004	530 - On req	(5 m - 25 W)
☐ DI	C0013WDI10004	530 - On req	(10 m - 50 W)

9,6 W/m	Opt	Im S - Im D	L
☐ DI	C0014MDI01004	998 - On req	(1 m - 9,6 W)
☐ DI	C0014MDI05004	998 - On req	(5 m - 48 W)
☐ DI	C0014MDI10004	998 - On req	(10 m - 96 W)
☐ DI	C0014WDI01004	1096 - On req	(1 m - 9,6 W)
☐ DI	C0014WDI05004	1096 - On req	(5 m - 48 W)
☐ DI	C0014WDI10004	1096 - On req	(10 m - 96 W)

14,4 W/m	Opt	Im S - Im D	L
☐ DI	C0015MDI01004	1437 - On req	(1 m - 14,4 W)
☐ DI	C0015MDI05004	1437 - On req	(5 m - 72 W)
☐ DI	C0015MDI10004	1437 - On req	(10 m - 144 W)
☐ DI	C0015WDI01004	1526 - On req	(1 m - 14,4 W)
☐ DI	C0015WDI05004	1526 - On req	(5 m - 72 W)
☐ DI	C0015WDI10004	1526 - On req	(10 m - 144 W)

Electronics

Rubber 2D_mini

Rubber 3D | V3 | 5 W/m - 9,6 W/m - 14,4 W/m

99374	ON/OFF - 75W - Φ 56
99331	ON/OFF - 150W - Φ 70
99332	0/1-10V - 150W - Φ 70
83333	DALI/PUSH - 150W - Φ 77
C-E400002	DALI/PUSH - 240W - Φ 77

Rubber 3D | V3 | 16 W/m - 15 W/m

Dimmer RF + RF Remote - Φ 53

C-E700002 + C-W600001

99331 CV 24V 150W - Φ 70


C-E700005 Dimmer DMX - Φ 60

DMX Controllers pag. XXIX


99331 CV 24V 150W - Φ 70

Accessories and cables

pages 680-681



16 W/m *	Opt	Im S - Im D	L
☐ DI	C0014DDI01004	Dynamic White 2000-6000 K	(1 m - 16 W)
☐ DI	C0014DDI05004	Dynamic White 2000-6000 K	(5 m - 80 W)



15 W/m *	Opt	Im S - Im D	L
☐ DI	C0014VDI01004	RBGW (3000 K)	(1 m - 15 W)
☐ DI	C0014VDI05004	RBGW (3000 K)	(5 m - 75 W)

* Pour l'alimentation/l'unité de contrôle, contacter le service d'assistance Linea Light.

* For power supply/control contact Linea Light support service.

Finishes ☐ Smooth white

Cct **M** 2700 **W** 3000 **V** RGBW **D** DW

RUBBER

FLEX LIGHTS & PROFILES






RUBBER

Corps en technopolymère blanc ou gris ciment.


White or concrete grey technopolymer body.

Rubber 3D | Concrete | V3 | LED strip CRI 90 | 24 V DC | 9,6 W/m

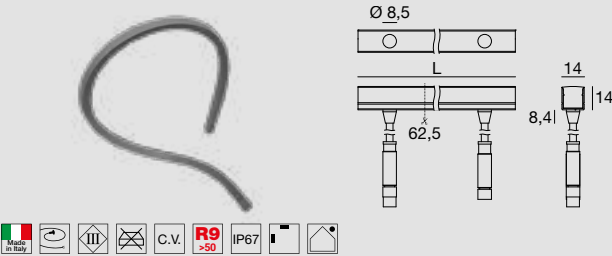

Opt		Im S - Im D	L
DI	C0017WDI01004	274 - On req	(1 m - 9,6 W)
DI	C0017WDI05004	274 - On req	(5 m - 48 W)
DI	C0017WDI10004	274 - On req	(10 m - 96 W)

Rubber 3D | V3 | LED strip CRI 90 | 48 V DC

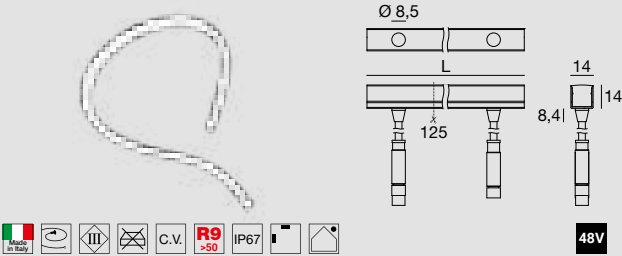

9,6 W/m	Opt		Im S - Im D	L
	DI	C0016MDI05004	1040 - On req	(5 m - 48 W)
	DI	C0016MDI10004	1040 - On req	(10 m - 96 W)
	DI	C0016WDI05004	1142 - On req	(5 m - 48 W)
	DI	C0016WDI10004	1142 - On req	(10 m - 96 W)



15 W/m	Opt		Im S - Im D	L
	DI	C0016VDI01004	RBGW (3000 K)	(1 m - 15 W)
	DI	C0016VDI05004	RBGW (3000 K)	(5 m - 75 W)
	DI	C0016VDI10004	RBGW (3000 K)	(10 m - 150 W)

Pour l'alimentation/l'unité de contrôle, contacter le service d'assistance Linea Light.
For power supply/control contact Linea Light support service.

48V

La caractéristique principale que Linea Light Group introduit avec Rubber 3D 48 V est la capacité d'augmenter la distance entre les points d'alimentation, utile également dans des projets pour lesquels les longueurs sont importantes. Simplifiant ainsi la conception et l'installation.

The main characteristic that Linea Light Group introduces through the Rubber 3D 48V units is the ability to increase the usable section even on projects where significant lengths are foreseen. Thereby simplifying planning and installation.

Electronics

Rubber 3D | V3 | 24 V DC - 9,6 W/m
99374 ON/OFF - 75W - Ø 56
99331 ON/OFF - 150W - Ø 70
99332 0/1-10V - 150W - Ø 70
83333 DALI/PUSH - 150W - Ø 77
C-E400002 DALI/PUSH - 240W - Ø 77

Rubber 3D | V3 | 48 V DC - 9,6 W/m
99784 ON/OFF - 150W CV 48V - Ø 80
99785 ON/OFF - 240W CV 48V - Ø 81
C-E400003 DALI/PUSH - 150W CV 48V - Ø 77
Switching CV 48V (pag. XII-XIII)
83177 Dimmer DMX 312W

Accessories and cables

pages 680-681

Rubber 3D | V3 | 48 V DC - 15 W/m
99784 ON/OFF - 150W CV 48V - Ø 80
99785 ON/OFF - 240W CV 48V - Ø 81

Dimmer RF + RF Remote - CV 48V - Ø 53
C-E700002 + C-W600001
Switching CV 48V (pag. XII-XIII)
83178 Dimmer DMX 384W

Finishes Smooth white
 Smooth concrete


Cct **M** 2700 **W** 3000 **V** RGBW





Corps en technopolymère blanc ou noir.
White or black technopolymer body.

Rubber 3D Optics | V2 | LED strip CRI 90 | 24 V DC

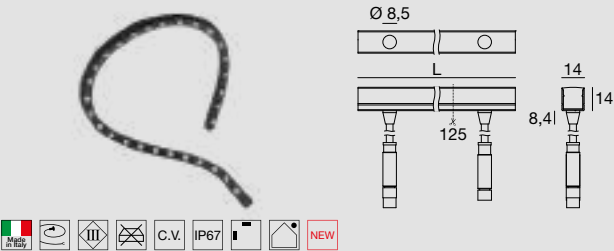

L 1 m - 19,5 W DC

Opt		Im S - Im D
24°	C0010MFL01004	1799 - 1677
24°	C0011MFL01004	1799 - 1677
37°	C0010MML01004	1799 - 1677
37°	C0011MML01004	1799 - 1677
24°	C0010WFL01004	1874 - 1747
24°	C0011WFL01004	1874 - 1747
37°	C0010WML01004	1874 - 1747
37°	C0011WML01004	1874 - 1747

L 3 m - 58,5 W DC

Opt		Im S - Im D
24°	C0010MFL03004	5397 - 5031
24°	C0011MFL03004	5397 - 5031
37°	C0010MML03004	5397 - 5031
37°	C0011MML03004	5397 - 5031
24°	C0010WFL03004	5622 - 5241
24°	C0011WFL03004	5622 - 5241
37°	C0010WML03004	5622 - 5241
37°	C0011WML03004	5622 - 5241

L 5 m - 97,5 W DC

Opt		Im S - Im D
24°	C0010MFL05004	8995 - 8385
24°	C0011MFL05004	8995 - 8385
37°	C0010MML05004	8995 - 8385
37°	C0011MML05004	8995 - 8385
24°	C0010WFL05004	9370 - 8735
24°	C0011WFL05004	9370 - 8735
37°	C0010WML05004	9370 - 8735
37°	C0011WML05004	9370 - 8735

Electronics

99374	ON/OFF - 75W - ⌀ 56
99331	ON/OFF - 150W - ⌀ 70
99332	0/1-10V - 150W - ⌀ 70
83333	DALI/PUSH - 150W - ⌀ 77
C-E400002	DALI/PUSH - 240W - ⌀ 77

Accessories and cables
pages 680-681

Finishes Smooth white
 Smooth black

Cct M 2700 W 3000


Accessories: Rubber 2D Mini

Linear profile



82846 1000 mm - 20 mm - 10 mm
82202 2000 mm - 20 mm - 10 mm
suitable for: Rubber 2D Mini

Clip with toothed spring



82847 50 mm - 20 mm - 10 mm
suitable for: Rubber 2D Mini


Accessories: Rubber 3D

Linear profile



99549 1000 mm - 18 mm - 19 mm
82198 2000 mm - 18 mm - 19 mm
C-K100007 1000 mm - 18 mm - 19 mm
C-K100008 2000 mm - 18 mm - 19 mm
suitable for: Rubber 3D (Not for 3D PROtection)

Linear profile with cable run



83034 1000 mm - 39 mm - 19 mm
82199 2000 mm - 39 mm - 19 mm
C-K100009 1000 mm - 39 mm - 19 mm
C-K100010 2000 mm - 39 mm - 19 mm
suitable for: Rubber 3D (Not for 3D PROtection)

Clip with toothed spring



C-F400001 50 mm - 23 mm - 21 mm
C-F400002
suitable for: Rubber 3D (Not for 3D PROtection)

Clip with toothed spring with cable run



C-F400003 50 mm - 41 mm - 21 mm
C-F400004
suitable for: Rubber 3D (Not for 3D PROtection)

Flexible profile




C-K100011 1007 mm - 13 mm - 16 mm
suitable for: Rubber 3D

Flexible antiglare shade




C-K100032 2035 mm - 80 mm - 34 mm
suitable for: Rubber 3D
To be completed with linear profile or clip.

Tilting bracket




83352
suitable for: Rubber 3D (Not for 3D PROtection)
To be completed with linear profile or clip.

Steel tilting bracket



C-K400168 L 50 mm - 42 mm - 28 mm
C-K400169 L 100 mm - 42 mm - 28 mm
suitable for: Rubber 3D
To be completed with linear profile or clip.

Spike with bracket



83351
suitable for: Rubber 3D (Not for 3D PROtection)
To be completed with linear profile or clip.

Peg with steel tilting bracket




C-F500004 L 50 mm
C-F500005 L 100 mm
suitable for: Rubber 3D (Not for 3D PROtection)
To be completed with linear profile or clip.

Cap kits




99539 Rubber (not for Rubber_0, Rubber 2D Mini).
99538 Rubber 2D Mini

Rubber profile drilling template




C-V200005 25 mm - 20 mm - 34 mm
hole Ø 13,2
suitable for: Linear profile Rubber 3D

Rubber 3D fixing profile for Track System



 **C-K100022** 100 mm - 27 mm - 15 mm
suitable for: Rubber 3D

Rubber 3D fixing profile for Track System



 **C-K100021** 2000 mm - 27 mm - 15 mm
suitable for: Rubber 3D

Track System power supply for Rubber 3D



 **C-E300007** On/Off - Max 50W DC - IP20
 **C-E300008** On/Off - Max 50W DC - IP20
suitable for: Rubber 3D (Not for 3D PROtection)

Input 220-240V DC - Output 24V DC - Class 2

Cables

Cable with connector



 **99688** Conn. F 2x 0,25 - 2000 mm
 **99689** Conn. M 2x 0,25 - 2000 mm
suitable for: Rubber 3D Optics 22W/m - Rubber 3D Pixel

Cable with connector



 **C-W200001** Conn. F 2x 0,25 - 2000 mm
 **C-W200002** Conn. M 2x 0,25 - 2000 mm
suitable for: Rubber 3D - Rubber 3D concrete
Rubber 3D Optics V2 20W/m - Rubber 2D Mini

Cable SPI with connector PIXEL



 **82850** Conn. F 2x 0,5 - 2000 mm
 **82851** Conn. M 2x 0,5 - 2000 mm
suitable for: Rubber 3D PIXEL RGBW

Cable with connector RGBW



 **C-W200005** Conn. M 5x 0,5 - 2000 mm
 **C-W200006** Conn. F 5x 0,5 - 2000 mm
suitable for: Rubber 3D RGBW

Cable with connector Dynamic White



 **C-W200003** Conn. M 3x 0,5 - 2000 mm
 **C-W200004** Conn. F 3x 0,5 - 2000 mm

suitable for: Rubber 3D Dynamic White

Cable with connector M+F



 **C-W200007** Conn. M/F 2x 0,5 - 5000 mm
suitable for: Rubber 3D - Rubber 3D concrete
Rubber 3D Optics 20W/m - Rubber 2D Mini

Cable with connector M+F



 **C-W200009** Conn. M/F 3x 0,5 - 5000 mm

suitable for: Rubber 3D Dynamic White

Cable with connector M+F



 **C-W200011** Conn. M/F 5x 0,5 - 5000 mm


suitable for: Rubber 3D RGBW



Corps en technopolymère blanc.
White technopolymer body.




Rubber 3D PIXEL RGBW | LED strip CRI 90 | 24 V DC | 13,2W/m

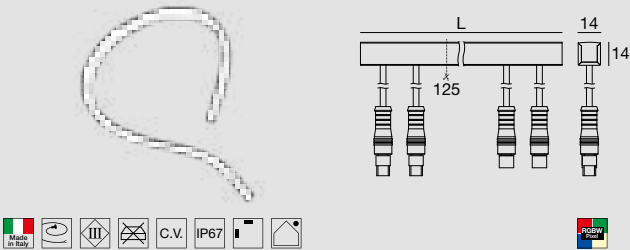

Opt	Im S - Im D	L
☐ DI	C0056VDI00504 RGBW (3000 K)	(0,5 m - 6,6 W)
☐ DI	C0056VDI01004 RGBW (3000 K)	(1 m - 13,2 W)
☐ DI	C0056VDI05004 RGBW (3000 K)	(5 m - 66 W)

Rubber 3D PROtection | V3 | LED strip CRI 90 | 24 V DC




Electronics

99786	ON/OFF - 240W - Φ 81
C-E700004	Easy Pixel Controller + TLC
C-E700037	Easy Pixel controller smartphone

Accessories and cables


RUBBER 3D PIXEL RGBW

Cable with connector

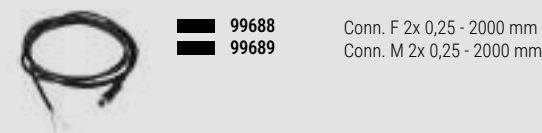


99688	Conn. F 2x 0,25 - 2000 mm
99689	Conn. M 2x 0,25 - 2000 mm

Cable SPI with connector PIXEL

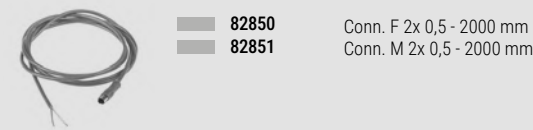

82850	Conn. F 2x 0,5 - 2000 mm
82851	Conn. M 2x 0,5 - 2000 mm

T-cable with connectors




83387



Corps en technopolymère blanc.
White technopolymer body.



Rubber_O | topLED CRI 90 | 48 V DC | 12W/m

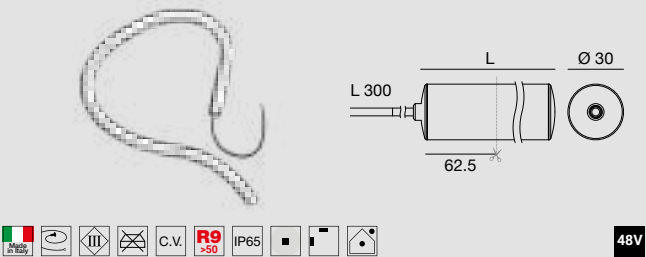

Opt	Im S/m - Im D/m	L
☐ DI C0020MDI02517	1538 - 1150	(2,5 m - 30 W)
☐ DI C0020MDI05017		(5 m - 60 W)
☐ DI C0020MDI10017		(10 m - 120 W)
☐ DI C0020WDI02517	1654 - 1256	(2,5 m - 30 W)
☐ DI C0020WDI05017		(5 m - 60 W)
☐ DI C0020WDI10017		(10 m - 120 W)
☐ DI C0020NDI02517	1770 - 1284	(2,5 m - 30 W)
☐ DI C0020NDI05017		(5 m - 60 W)
☐ DI C0020NDI10017		(10 m - 120 W)

48V

La caractéristique principale que Linea Light Group introduit avec Rubber 3D 48 V est la capacité d'augmenter la distance entre les points d'alimentation, utile également dans des projets pour lesquels les longueurs sont importantes. Simplifiant ainsi la conception et l'installation.

The main characteristic that Linea Light Group introduces through the Rubber 3D 48V units is the ability to increase the usable section even on projects where significant lengths are foreseen. Thereby simplifying planning and installation.

Electronics

- 99784

ON/OFF - 150W CV 48V - Ø 80
- 99785

ON/OFF - 240W CV 48V - Ø 81
- C-E400003

DALI/PUSH - 150W CV 48V - Ø 77
- Switching

CV 48V (pag. XII-XIII)
- 83177

Dimmer DMX 312W


Accessories

- C-K400076

Kit x5 closing caps Ø 30 mm
- C-K400077

Kit x1 closing cap Ø 30 mm +
cable 2 poles
- C-K400080

Silicone glue for sealing







Exemples d'application

Cascades symétriques ou asymétriques, concentriques convergentes ou divergentes. Découvrez quelques exemples d'installations avec Rubber_O et les accessoires dédiés.

Application examples


Symmetrical or asymmetrical, concentrically converging or diverging cascades. Discover some installation examples with Rubber_O and dedicated accessories.

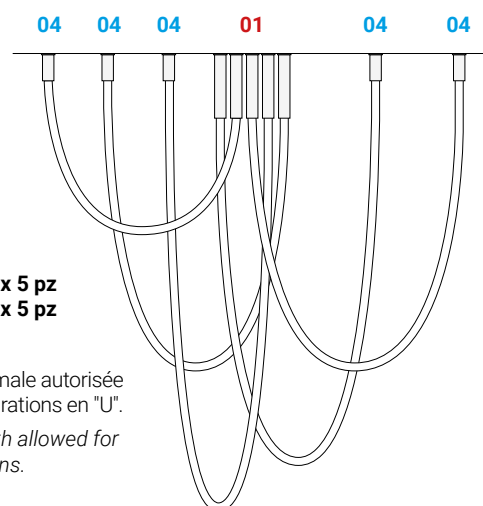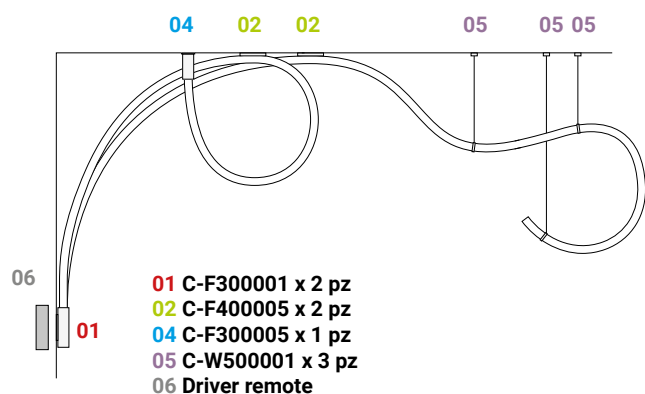

Components

RUBBER_O


Rubber_O | Suspension accessory





C-W500001 1 x ring + steel cable


Rubber_O | Wall clip





C-F400005 1 x wall clip + 3 x screws


Rubber_O | 1/2-way connector






C-F300001
C-F300002


Rubber_O | 1/2-way connector + on/off driver






C-F300003 48 V DC - 60W max
C-F300004 48 V DC - 60W max

Rubber_O | 1/2-way connector + on/off driver





C-F300009 48 V DC - 120W max
C-F300010 48 V DC - 120W max

Rubber_O | Ceiling connector






C-F300005 48 V DC - 120W max
C-F300006 48 V DC - 120W max

Rubber_O | Ceiling connector + on/off driver





C-F300007 48 V DC - 60W max
C-F300008 48 V DC - 60W max

Casambi	II
INDOOR CC On/Off Driver	III
INDOOR CC Triac Driver	VI
INDOOR CC 0/1-10V Driver	VII
INDOOR CC DALI Driver	VIII
INDOOR CV-CC 0/1-10V & DALI Converter	XI
INDOOR CV On/Off Driver	XI
INDOOR CV On/Off Switching	XII
INDOOR CV Triac Driver	XIII
INDOOR CV DALI Driver	XIII
INDOOR CV 0/1-10V, DALI & PUSH Dimmer	XIV
OUTDOOR CC On/Off Driver	XV
OUTDOOR CC DALI Driver	XVI
OUTDOOR CV On/Off Driver	XVII
OUTDOOR CC-CV On/Off Converter	XVIII
OUTDOOR CV 0/1-10V Driver	XVIII
OUTDOOR CV DALI Driver	XIX
Master Triac	XX
Master DALI	XX
Dimmer CC radio frequency	XXIII
Dimmer CV radio frequency	XXIII
Dimmer CV SPI	XXIV
Dimmer CC & CV DALI DT8	XXV
Dimmer CC & CV DALI DT6	XXVI
Signal Converter DMX/DALI	XXVII
Dimmer CC DMX	XXVII
Dimmer CV DMX	XXVIII
Master DMX	XXIX
Emergency	XXXI
Cables	XXXIII
Extension cables	XXXIII
Dmx accessories Junction boxes	XXXIV





ELECTRONICS

Casambi




Leddip | Casambi LED driver



	Range	Output	Input	Eff.	PF	Surge
C-E100019	1.8-10.5W DC	200mA 9-52V	220-240VAC	85%	0.96	2 kV
	2.7-15.5W DC	300mA 9-52V				
	3-18W DC powerLEDs	350mA 9-52V				
	3.6-20W DC arrayLED	400mA 9-52V				
	4.5-26W DC arrayLED	500mA 9-52V				
	5.4-26W DC arrayLED	600mA 9-43V				
	6-26W DC arrayLED	700mA 9-37V				

Alimentation multiple équipée de dip-switches pour la section de courant de sortie de 150 à 700 mA. Driver LED Casambi. Gradation de 1 à 100 %. Sans scintillement.
Multiple power supply equipped with dip-switches for the output current section from 150 to 700 mA. Casambi LED driver. Dimming from 1-100 %. Flicker-free.


Ledmin | Casambi CC 4ch



	Range	Output	Input
C-E500020	4ch. x (2.1-8.4W DC/ch.)	350mA 6-24V	12-24V DC
C-E500021	4ch. x (3-12 W DC/ch)	500mA 6-24V	12-24V DC

24V DC switching
99371 Peta 50 W
84700 Peta 75 W
99374 Reson 75 W
99331 Reson 150 W
Le gradateur à 4 canaux avec module CASAMBI permet de contrôler tous les types de LED : blanc, blanc dynamique, RGB et RGBW.
4-channel dimmer with CASAMBI module allows for the control of all types of LEDs: white, dynamic white, RGB and RGBW.


Ledmin | Casambi CV 4ch



	Range	Output	Input
C-E500022	4ch. x (60W DC/ch.)	2.5A 24V	12-24V DC

24V DC switching
99371 Peta 50 W
84700 Peta 75 W
99374 Reson 75 W
99331 Reson 150 W
Le gradateur à 4 canaux avec module CASAMBI permet de contrôler tous les types de LED : blanc, blanc dynamique, RGB et RGBW.
4-channel dimmer with CASAMBI module allows for the control of all types of LEDs: white, dynamic white, RGB and RGBW.


BasicDIM | Wireless passive module



	Type	Signal Output	Input	Connector
C-E700012		DALI	15-16V DC	CLAMP

Le module passif sans fil est un convertisseur BT DALI compatible Casambi avec 4 entrées à bouton-poussoir librement configurables. Le module est alimenté par le bus DALI, aucune alimentation électrique supplémentaire n'est nécessaire.
The passive wireless module is a BT DALI converter compatible with Casambi, with 4 freely configurable button inputs. The module is powered via the DALI bus, so no additional mains power supply is required.

Ledmin | Converter Casambi DMX



	Type	Signal Output	Input	Connector
C-E700021		DMX	12-48V DC	CLAMP

83009 Power supply
Convertisseur de signal Casambi vers DMX. Configurable via l'application Casambi.
Signal converter from Casambi to DMX. Configurable via Casambi APP.

CasDIM | 0-10V, 1-10V or DALI dimming interface




CasDIM_PH | trailing-edge dimmer




INDOOR | CC On/Off Driver


Bit | On/Off Driver

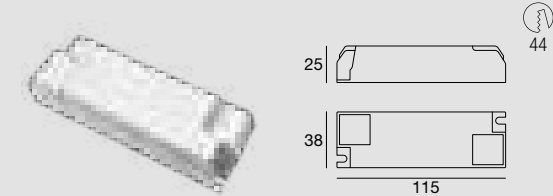

Slim | On/Off Driver

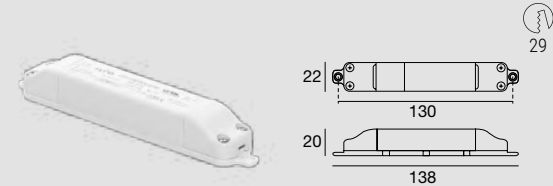

Slim-12 | On/Off Driver

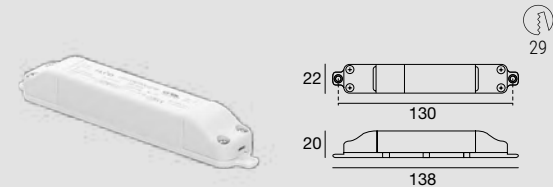

Finishes ☐ Text white R9003



	Type	Signal Output	Input	Connector
KIT0079	☐	0-10V, 1-10V, DALI	220-240V	CLAMP

Unité de contrôle sans fil pour drivers LED avec interface de gradation 0-10 V, 1-10 V ou DALI. Disponible avec interface de contrôle analogique 0-10 V (et 1-10 V) ou interface numérique DALI autonome. La configuration DALI autonome permet la mise en œuvre de systèmes d'éclairage multicanaux avec couleur (RGB et RGBW) ou température de couleur (CCT) réglables.

Wireless control unit for LED drivers with 0-10 V, 1-10 V or DALI dimming interface. Available with 0-10 V (and 1-10 V) analog control interface or standalone DALI digital interface. The standalone DALI configuration allows the implementation of multichannel lighting systems with adjustable color (RGB and RGBW) or color temperature (CCT).



	Type	Signal Output	Input	Connector
KIT0080	☐	Phase cut	220-240V AC	CLAMP

Dispositif de coupure de phase à bord de fuite activé par Casambi, contrôlable via Bluetooth, adapté à une utilisation avec des lampes à incandescence, des lampes LED dimmables et des alimentations LED dimmables. L'unité CBU-TED peut gérer jusqu'à 100 W à 230 VAC.


Trailing-edge phase-cut device enabled by Casambi, controllable via Bluetooth, suitable for use with incandescent lamps, dimmable LED lamps, and dimmable LED drivers. The CBU-TED unit can handle up to 100 W at 230 VAC.



	Range	Output	Input	Eff.	PF	Surge
99243	6.5W DC arrayLED	700mA 10V	220-240V AC	80%	0.6	0.5 kV
99370	10W DC arrayLED	300mA 36V	220-240V AC	80%	0.6	0.5 kV

Protection à réarmement automatique contre la surchauffe, la surcharge, les circuits ouverts et les courts-circuits sur la ligne de sortie.


Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.



	Range	Output	Input	Eff.	PF	Surge
99307	0.7-1.5W DC powerLEDs	220mA 3-7V	220-240V AC	80%	0.6	4 kV
89144	1-2W DC powerLEDs	350mA 3-7V	220-240V AC	80%	0.6	4 kV
	1-2.5W DC topLED					
89145	3-6W DC powerLEDs	350mA 9-18V	220-240V AC	80%	0.6	4 kV
	3.5-7W DC topLED					
99195	1.5-3W DC powerLEDs	500mA 3-7V	220-240V AC	80%	0.6	4 kV
89146	3-5W DC powerLEDs	500mA 6-10V	220-240V AC	80%	0.6	4 kV
89147	2-4W DC powerLEDs	630mA 3-7V	220-240V AC	80%	0.6	4 kV

Smartwave ™ : excellente efficacité, longue durée de vie, protection contre les surtensions, PF élevé. Protection à réarmement automatique contre la surchauffe, la surcharge, les circuits ouverts et les courts-circuits sur la ligne de sortie.

Smartwave™: excellent efficiency, a long operating life, surge protection and high PF. Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.




	Range	Output	Input	Eff.	PF	Surge
83007	2-5W DC powerLEDs	220mA 9-18V	220-240V AC	80%	0.9	2 kV
99375	6-12W DC powerLEDs	350mA 17-40V	220-240V AC	80%	0.9	2 kV
99377	4.5-10W DC powerLEDs	500mA 9-18V	220-240V AC	80%	0.9	2 kV
99376	6-12W DC powerLEDs	630mA 9-18V	220-240V AC	80%	0.9	2 kV


Smartwave ™ : excellente efficacité, longue durée de vie, protection contre les surtensions, PF élevé. Protection à réarmement automatique contre la surchauffe, la surcharge, les circuits ouverts et les courts-circuits sur la ligne de sortie.

Smartwave™: excellent efficiency, a long operating life, surge protection and high PF. Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.

K18 | On/Off Driver

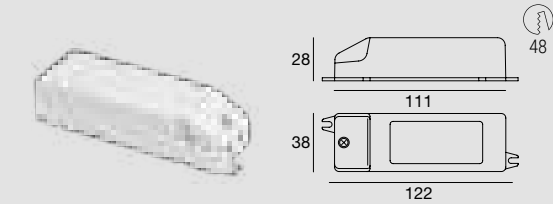


Simon | On/Off Driver

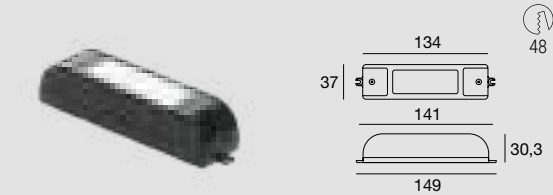


Connecteur Easy Plug inclus pour les codes **99260, 99740**.

Easy Plug connector included for codes **99260, 99740**.

Emy | On/Off Driver

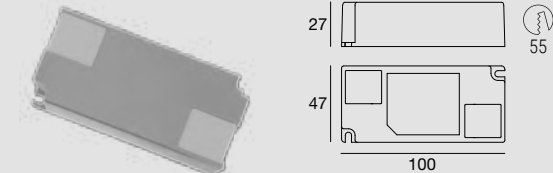

Leon | On/Off Driver

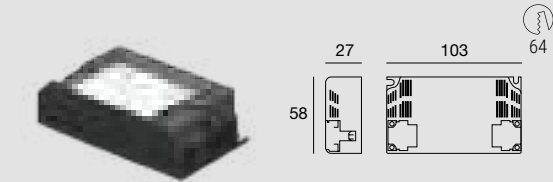

Connecteur Easy Plug inclus pour les codes **99261, 99112, 99093, 99146**.

Easy Plug connector included for codes **99261, 99112, 99093, 99146**.



	Range	Output	Input	Eff.	PF	Surge
C-E100046	3-20W DC powerLEDs	1050mA 21V	220-240V AC	85%	0.6	2 kV

Protection à réarmement automatique contre la surchauffe, la surcharge, les circuits ouverts et les courts-circuits sur la ligne de sortie.

Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.



	Range	Output	Input	Eff.	PF	Surge
99198	8W DC arrayLED 3-7W DC powerLEDs 8W DC topLED	220mA 17-40V	220-240V AC	89%	0.9	4 kV
99126	13.5W DC topLED 6-12W DC powerLEDs	350mA 17-40V	220-240V AC	89%	0.9	4 kV
99128	4.5-9W DC powerLEDs	500mA 9-20V	220-240V AC	89%	0.9	4 kV
99129	6-12W DC powerLEDs	630mA 9-20V	220-240V AC	89%	0.9	4 kV
99734	8W DC arrayLED 11W DC arrayLED 15W DC arrayLED	220mA 12-37V 300mA 12-37V 400mA 12-37V	220-240V AC	82%	0.96	2 kV
99735	6W DC powerLEDs 6.5-7W DC arrayLED 10W DC powerLEDs	500mA 9-12V 700mA 9-12V 800mA 9-12V	220-240V AC	74%	0.96	2 kV
99260	13W DC topLED	350mA 17-40V	220-240V AC	89%	0.9	4 kV
99740	8W DC arrayLED 11W DC arrayLED 15W DC arrayLED	220mA 12-37V 300mA 12-37V 400mA 12-37V	220-240V AC	82%	0.96	2 kV

Smartwave™ : excellente efficacité, longue durée de vie, protection contre les surtensions, PF élevé. Protection contre la surchauffe, la surcharge, les circuits ouverts et les courts-circuits sur la ligne de sortie. Pour les codes 99734, 99735 et 99740, sélection du courant via cavalier.

Smartwave™: excellent efficiency, a long operating life, surge protection and high PF. Protection against overheating, overloading, open circuits and short-circuits along the output line. For codes 99734, 99735 and 99740, the current is selected via the jumper.



	Range	Output	Input	Eff.	PF	Surge
C-E100045	40W DC	1050mA 40V	220-240V AC	88%	0.9	3 kV

Protection à réarmement automatique contre la surchauffe, la surcharge, les circuits ouverts et les courts-circuits sur la ligne de sortie.

Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.




	Range	Output	Input	Eff.	PF	Surge
99106	9-18W DC powerLEDs 19W DC topLED	500mA 39V	220-240V AC	91%	0.95	4 kV
99105	12-24W DC powerLEDs	630mA 39V	220-240V AC	91%	0.95	4 kV
99147	25W DC arrayLED	700mA 37V	220-240V AC	91%	0.95	4 kV
99135	30W DC arrayLED 30W DC topLED	840mA 39V	220-240V AC	91%	0.95	4 kV
99239	35W DC arrayLED	950mA 37V	220-240V AC	89%	0.95	4 kV
99261	23W DC topLED	630mA 39V	220-240V AC	91%	0.95	4 kV
99112	25W DC arrayLED	700mA 37V	220-240V AC	91%	0.95	4 kV
99093	30W DC arrayLED 30W DC topLED	840mA 39V	220-240V AC	91%	0.95	4 kV
99146	35W DC arrayLED	950mA 37V	220-240V AC	89%	0.95	4 kV

Smartwave™ : excellente efficacité, longue durée de vie, protection contre les surtensions, PF élevé. Protection contre la surchauffe, la surcharge, les circuits ouverts et les courts-circuits sur la ligne de sortie.

Smartwave™: excellent efficiency, a long operating life, surge protection and high PF. Protection against overheating, overloading, open circuits and short-circuits along the output line.


K44 | On/Off Driver

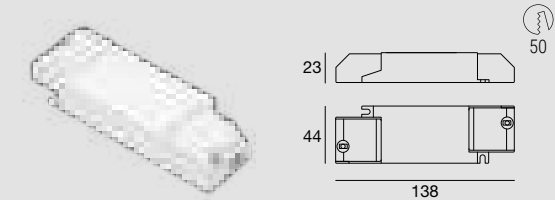

	Range	Output	Input	Eff.	PF	Surge
C-E100033	10/40W DC	300/1050mA 9-45V	220-240V AC	88%	0.95	2 kV

Conducteurs multi-courants de 300 à 1050 mA, par pas de 50 mA. Protection à réarmement automatique contre les surtempératures, la surcharge, le circuit ouvert et le court-circuit le long de la ligne de sortie.
Multi-current driver from 300 to 1050 mA, in 50 mA steps. Self-resetting protection against overheating, overloading, open circuit and short-circuits along the output line.

K53 | On/Off Driver

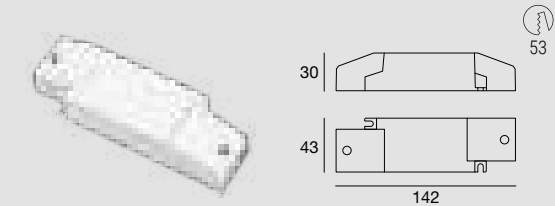


	Range	Output	Input	Eff.	PF	Surge
C-E100048 / C-E100049	18-50W DC arrayLED	500-1200mA 2.5-44V DC 1250mA 2.5-42V DC 1300mA 2.5-40V DC 1350mA 2.5-39V DC 1400mA 2.5-38V DC	220-240 V AC	89%	≥0.95	1 kV

Conducteurs multi-courants de 500 à 1400 mA, par pas de 1 mA, réglable via l'APP NFC du smartphone. Protection à réarmement automatique contre les surtempératures, la surcharge, le circuit ouvert et le court-circuit le long de la ligne de sortie.
Multi-current driver from 500 to 1400 mA, in 1 mA steps, settable via smartphone APP NFC. Self-resetting protection against overheating, overloading, open circuit and short-circuits along the output line.

Connecteur Easy Plug inclus pour les codes **C-E100049**.
Easy Plug connector included for code C-E100049.


Wade | On/Off Driver

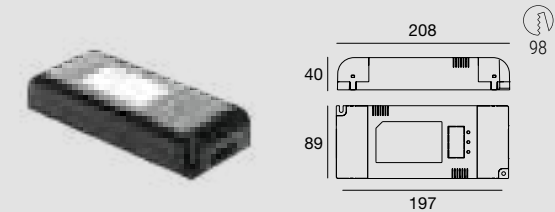

	Range	Output	Input	Eff.	PF	Surge
99717	70W DC topLED	1.75A 37V	220-240V AC	88%	0.97	5 kV
99718	90W DC topLED	2.25A 37V	220-240V AC	88%	0.97	5 kV

Protection contre la surchauffe, la surcharge, les circuits ouverts et les courts-circuits sur la ligne de sortie.
Protection against overheating, overloading, open circuits and short-circuits along the output line.

VoltEdge | On/Off Driver

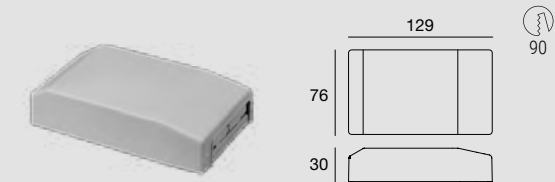

	Range	Output	Input	Eff.	PF	Surge
83122	38 W DC powerLEDs 46 W DC powerLEDs	600mA 60V 600mA 72V	220-240V AC	90%	0.95	2 kV


Protection contre la surchauffe, la surcharge, les circuits ouverts et les courts-circuits sur la ligne de sortie.
Protection against overheating, overloading, open circuits and short-circuits along the output line.

INDOOR | CC Triac Driver

Edge | Triac Multi Current




34



150

46



166



98436 Cable and connector



56



	Range	Output	Input	Eff.	PF	Surge
99141	1-12 W DC powerLEDs	350mA 39V	220-240V AC	85%	0.97	1 kV
	1.5-18 W DC powerLEDs	500mA 39V				
	2-24 W DC powerLEDs	550mA 39V				
	25 W DC arrayLED	700mA 37V				


Réglage via Dimmer à découpage de phase ou TRIAC. Fonctionnement également à 24V DC, puissance maximale de 22W. Sélection de l'intensité du courant de sortie via un dip switch dédié. Protection contre les surchauffes, les courts-circuits, les surcharges et les surtensions du réseau.

Adjustment via Phase Cut or TRIAC Dimmer. Operation also at 24V DC, maximum 22W. Selection of output current intensity via dip-switch. Protection against over-temperature, short circuits, overloading and mains overvoltages.

WT | Triac Multi Current



43



150

29





98436 Cable and connector



52



	Range	Output	Input	Eff.	PF	Surge
99360	8 W arrayLED	250mA 37V	220-240V AC	88%	0.9	1 kV
	13 W arrayLED	350mA 37V				
	25 W arrayLED	700mA 37V				


Réglage via gradateur à coupure de phase ou TRIAC. Sélection de l'intensité du courant de sortie via commutateur DIP. Protection à réarmement automatique contre la surchauffe, la surcharge, les circuits ouverts et les courts-circuits sur la ligne de sortie.

Adjustment via Phase Cut or TRIAC Dimmer. Selection of output current intensity via dip-switch. Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.

Mouse15 | Triac Multi Current



29,5



101,5

51





98436 Cable and connector



60



	Range	Output	Input	Eff.	PF	Surge
C-E100052	7-10.5 W arrayLED	250mA 28-42V	220-240V AC	81%	0.95	1 kV
	10-15 W arrayLED	350mA 28-42V				


Driver LED à courant constant dimmable (SELV). Driver LED indépendant avec serre-câbles. Dimmable via variateur de phase à coupure ascendante et descendante. Plage de gradation de 5 à 100 % (selon le variateur).

Dimmable constant current LED driver (SELV). Independent LED driver with cable clamps. Dimmable via leading edge and trailing edge phase dimmer. Dimming range 5 to 100 % (depending on dimmer).

Mouse21 | Triac Multi Current



29,5



101,5

51





98436 Cable and connector



60



	Range	Output	Input	Eff.	PF	Surge
C-E100053	8,5-12.5 W arrayLED	300mA 28-42V	220-240V AC	82%	0.95	1 kV
	12.5-19 W arrayLED	450mA 28-42V				
	14-21 W arrayLED	500mA 28-42V				


Driver LED à courant constant dimmable (SELV). Driver LED indépendant avec serre-câbles. Dimmable via variateur de phase à coupure ascendante et descendante. Plage de gradation de 5 à 100 % (selon le variateur).

Dimmable constant current LED driver (SELV). Independent LED driver with cable clamps. Dimmable via leading edge and trailing edge phase dimmer. Dimming range 5 to 100 % (depending on dimmer).

Mouse44 | Triac Multi Current



31



130

68





98436 Cable and connector



72





	Range	Output	Input	Eff.	PF	Surge
C-E100054	19,5-29 W arrayLED	700mA 28-42V	220-240V AC	87%	0.95	1 kV
	29-44 W arrayLED	1050mA 28-42V				

Driver LED à courant constant dimmable (SELV). Driver LED indépendant avec serre-câbles. Dimmable via variateur de phase à coupure ascendante et descendante. Plage de gradation de 5 à 100 % (selon le variateur).

Dimmable constant current LED driver (SELV). Independent LED driver with cable clamps. Dimmable via leading edge and trailing edge phase dimmer. Dimming range 5 to 100 % (depending on dimmer).

INDOOR | CC 0/1-10V Driver

Multipower PRO | 0/1-10V PUSH Multi Current

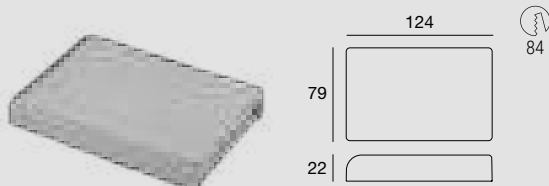


	Range	Output	Input	Eff.	PF	Surge
83143	68 W DC powerLEDs	550mA 108V	99-264V AC	92%	0.95	4 kV

Driver multipower suministrado con dip-switch para la selección de la corriente de salida. Protecciones: contra sobrecalentamiento y cortocircuitos, contra picos de tensión de red, contra sobrecargas. Regulación de luz 0/1 - 100% mediante función PUSH, interfaz 0/1...10 V ($I = 1 \text{ mA}$) o potenciómetro de 100 Kohm. Posibilidad de utilizar la función PUSH en 4/5 controladores sin cable de sincronización. La longitud máxima del cable, desde el pulsador hasta el último conductor, debe ser máx. 15 m.

Multipower driver supplied with dip-switch for the selection of the output current. Protections: against overheating and short circuits, against mains voltage spikes, against overloads. Light regulation 0/1 - 100 % by means of PUSH function, 0/1...10 V interface ($I=1 \text{ mA}$) or 100 Kohm potentiometer. Possibility to use PUSH function to 4/5 drivers without sync cable. Maximum length of the cable, from push button to last driver, must be max. 15 m.



Slim_PRO | 0/1-10V Driver




	Range	Output	Input	Eff.	PF	Surge
C-E100010	4 W DC	350mA 9-12V	220-240V AC	73%	0.45	2 kV
C-E100004	6 W DC	500mA 6-12V	220-240V AC	72%	0.5	2 kV

Ajustes mediante interfaz 0/1-10V, o potenciómetro. Protección autorreiniciable contra sobretemperatura, sobrecarga, circuito abierto y cortocircuito en la línea de salida.

Settings via 0/1-10V interface or potentiometer. Self-resetting protection against overheating, overloading, open circuit and short-circuits along the output line.



Simon | 0/1-10V Multi Current



	Range	Output	Input	Eff.	PF	Surge
99732 / 99739	8 W DC arrayLED 11 W DC arrayLED 15 W DC arrayLED	220mA 12-37V 300mA 12-37V 400mA 12-37V	220-240V AC	82%	0.96	2 kV

99733	6 W DC powerLEDs 6,5 W - 8,5 W DC arrayLED 10 W DC powerLEDs	500mA 9-12V 700mA 9-12V 800mA 9-12V	220-240V AC	82%	0.96	2 kV
--------------	--	---	-------------	-----	------	------


Connecteur Easy Plug inclus pour les codes **99739**.
Easy Plug connector included for codes **99739**.

Sélection de l'intensité du courant de sortie via cavalier. Réglages via interface 0/1-10 V ou potentiomètre. Protection à réarmement automatique contre la surchauffe, la surcharge, les circuits ouverts et les courts-circuits sur la ligne de sortie.

Selection of output current intensity via jumper. Settings via 0/1-10V interface or potentiometer. Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.



Boson | 0/1-10V N/O button Multi Current



	Range	Output	Input	Eff.	PF	Surge
99115	1-15 W DC powerLEDs 15 W DC arrayLED 1.5-18 W DC powerLEDs 19 W DC arrayLED 2-20 W DC powerLEDs	350mA 45V 350mA 39V 500mA 39V 500mA 39V 630mA 33V	220-240V AC	87%	0.6	4 kV
99262	13 W DC arrayLED 18 W DC arrayLED 20 W DC arrayLED	350mA 37V 500mA 37V 630mA 33V	220-240V AC	87%	0.6	4 kV


Connecteur Easy Plug inclus pour les codes **99262**.
Easy Plug connector included for codes **99262**.

Sélection de l'intensité du courant de sortie via une borne dédiée. Réglages via interface, ou potentiomètre 0/1-10 V, ou bouton NO. Possibilité de connecter jusqu'à 50 drivers (via bus Sync). Protection à réarmement automatique contre la surchauffe, la surcharge, les circuits ouverts et les courts-circuits sur la ligne de sortie.

Selection of output current intensity via dedicated terminal. Settings via interface, or 0/1-10V potentiometer, or N/A button. Possibility of connecting up to 50 drivers (via the Sync bus). Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.



WT | 0/1-10V Multi Current



	Range	Output	Input	Eff.	PF	Surge
99361	8 W DC arrayLED 13 W DC arrayLED 25 W DC arrayLED	250mA 37V 350mA 37V 700mA 37V	200-240V AC	88%	0.9	1 kV



Réglages via interface 1-10 V ou potentiomètre. Sélection de l'intensité du courant de sortie via commutateur DIP. Protection à réarmement automatique contre la surchauffe, la surcharge, les circuits ouverts et les courts-circuits sur la ligne de sortie.

Settings via interface 1-10 V or potentiometer. Selection of the intensity of the output current via DIP switch. Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.

98436 Cable and connector

INDOOR | CC DALI Driver

Slim_PRO | DALI2 Push and Simply Dim Multi Current

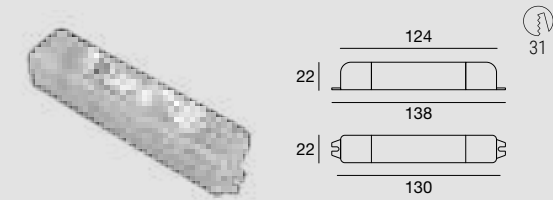


	Range	Output	Input	Eff.	PF	Surge
C-E100011	4 W DC	350mA 9-12V	220-240V AC	73%	0.45	2 kV
C-E100005	6 W DC	500mA 6-12V	220-240V AC	72%	0.5	2 kV

Réglages via interface DALI ou Simply Dim. Optimisation du signal de transmission DALI. Protection à réarmement automatique contre la surchauffe, la surcharge, les circuits ouverts et les courts-circuits sur la ligne de sortie.

Settings via DALI interface or Simply Dim. Optimisation of the DALI transmission signal. Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.

Slim_PRO HE | DALI2 Push and Simply Dim Multi Current

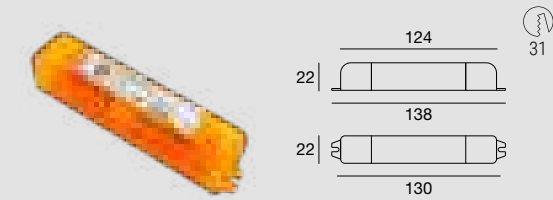


	Range	Output	Input	Eff.	PF	Surge
C-E100012	8.5-9.5 W DC	700mA 12-13V	220-240V AC	89%	0.5	4 kV
C-E100013	10-11 W DC	800mA 12-13V	220-240V AC	89%	0.5	4 kV

Réglages via interface DALI ou Simply Dim. Optimisation du signal de transmission DALI. Protection à réarmement automatique contre la surchauffe, la surcharge, les circuits ouverts et les courts-circuits sur la ligne de sortie.

Settings via DALI interface or Simply Dim. Optimisation of the DALI transmission signal. Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.

Simon_PRO | DALI2 Push and Simply Dim Multi Current

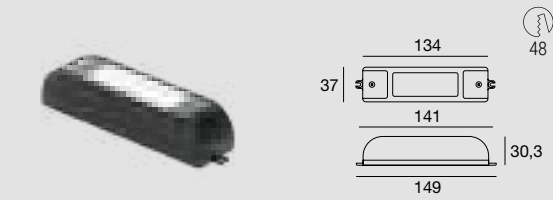


	Range	Output	Input	Eff.	PF	Surge
83322 / C-E100032	2.4-7.4 W DC	200mA 12-36V	220-240V AC	76%	0.91	2 kV
	3-9 W DC	250mA 12-36V	220-240V AC	78%	0.94	2 kV
	3.5-11W DC	300mA 12-36V	220-240V AC	80%	0.97	2 kV
	4-13 W DC	350mA 12-36V	220-240V AC	81%	0.97	2 kV
	5-15W DC	400mA 12-36V	220-240V AC	82%	0.98	2 kV
83323	4.5-6 W DC	500mA 9-12V	220-240V AC	72%	0.86	2 kV
	6-8.5 W DC	700mA 9-12V	220-240V AC	73%	0.94	2 kV
	7-9.5 W DC	800mA 9-12V	220-240V AC	74%	0.97	2 kV

Connecteur Easy Plug inclus pour les codes **C-E100032**.
Easy Plug connector included for codes **C-E100032**.

Réglages via interface DALI ou Simply Dim. Optimisation du signal de transmission DALI. Sélection de l'intensité du courant via une borne dédiée. Protection à réarmement automatique contre la surchauffe, la surcharge, les circuits ouverts et les courts-circuits sur la ligne de sortie.

Settings via DALI interface or Simply Dim. Optimisation of the DALI transmission signal. Selection of current intensity via dedicated terminal. Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.

K18 | DALI2 Push Multi Current

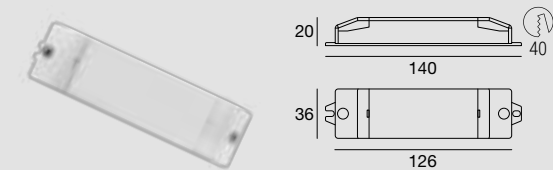


	Range	Output	Input	Eff.	PF	Surge
C-E100047	3-10 W DC	900mA 3-11V	220-240V AC	76%	0.93	1 kV

Réglages via l'interface DALI2 ou PUSH. Protection à réarmement automatique contre les surtempératures, la surcharge, le circuit ouvert et le court-circuit le long de la ligne de sortie.

Settings via DALI2 or PUSH interface. Self-resetting protection against overheating, overloading, open circuit and short-circuits along the output line.

Argo_PRO | DALI2 Push and Simply Dim Multi Current

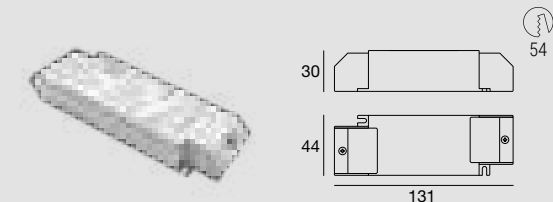

	Range	Output	Input	Eff.	PF	Surge
C-E100001/ C-E100030	6-15 W DC	400mA 15-36V	220-240V AC	76%	0.93	2 kV
C-E100030	6.5-16.5W DC	450mA 15-36V	220-240V AC	78%	0.93	2 kV
	7.5-18.5W DC	500mA 15-36V	220-240V AC	80%	0.93	2 kV
	8-20W DC	550mA 15-36V	220-240V AC	81%	0.93	2 kV
	9-22W DC	600mA 15-36V	220-240V AC	85%	0.93	2 kV
C-E100016/ C-E100031	10.5-26 W DC	700mA 15-36V	220-240V AC	85%	0.93	2 kV

Réglages via interface DALI ou Simply Dim. Optimisation du signal de transmission DALI. Sélection de l'intensité du courant via une borne dédiée. Protection à réarmement automatique contre la surchauffe, la surcharge, les circuits ouverts et les courts-circuits sur la ligne de sortie.

Settings via DALI interface or Simply Dim. Optimisation of the DALI transmission signal. Selection of current intensity via dedicated terminal. Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.

Argo | DALI Push and Simply Dim Multi Current



25


49

210

56



Connecteur Easy Plug inclus pour les codes **99330**.
Easy Plug connector included for codes **99330**.



	Range	Output	Input	Eff.	PF	Surge
99345 /	6-25W DC arrayLED	700mA 9-37V	220-240V AC	85%	0.95	4 kV
99330	7.5-30W DC arrayLED	840mA 9-37V				
	9-35W DC arrayLED	950mA 9-37V				

Réglages via interface DALI ou Simply Dim. Optimisation du signal de transmission DALI. Sélection de l'intensité du courant via une borne dédiée. Protection à réarmement automatique contre la surchauffe, la surcharge, les circuits ouverts et les courts-circuits sur la ligne de sortie.

Settings via DALI interface or Simply Dim. Optimisation of the DALI transmission signal. Selection of current intensity via dedicated terminal. Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.

Emy | DALI2 PUSH Driver



28

46

145

54



	Range	Output	Input	Eff.	PF	Surge
99971.02	40W DC	1050 mA 40V	190-240V AC	87%	0.97	2 kV

Réglages via l'interface DALI2 ou PUSH. Protection à réarmement automatique contre les surtempératures, la surcharge, le circuit ouvert et le court-circuit le long de la ligne de sortie.

Settings via DALI2 or PUSH interface. Self-resetting protection against overheating, overloading, open circuit and short-circuits along the output line.

K44 | DALI2 PUSH Driver



23

44

138

50



	Range	Output	Input	Eff.	PF	Surge
C-E100034	10/40W DC	300/1050mA 9-45V	220-240V AC	88%	0.95	2 kV

Réglages via l'interface DALI2 ou PUSH. Multi-courant de 300 à 1 050 mA, par pas de 50 mA. Protection à réarmement automatique contre les surtempératures, la surcharge, le circuit ouvert et le court-circuit le long de la ligne de sortie.

Settings via DALI2 or PUSH interface. Multi-current from 300 to 1050mA, in 50mA steps. Self-resetting protection against overheating, overloading, open circuit and short-circuits along the output line.

Dynamic Drive | DRIVER DALI 2 DT8 2CH




58

30

202

66




	Range	Output	Input	Eff.	PF	Surge
83159	14-35W DC arrayLED	700mA 37V	220-240V AC	88%	0.9	1 kV

Paramètres via l'interface DALI. Driver pour Dinamic White DT8. Niveau de gradation de 0 / 1-100%.

Settings via the DALI interface. Driver for Dinamic White DT8. Dimming level from 0/1-100%.

LumiTune | DRIVER DALI 2 DT8 2CH



76

30

153

82




	Range	Output	Input	Eff.	PF	Surge
83058	10W DC arrayLED	350mA 39V	120-250V AC	87%	0.9	2 kV
83059	20W DC arrayLED	600mA 39V	120-250V AC	87%	0.9	2 kV
83060	30W DC arrayLED	840mA 39V	120-250V AC	87%	0.9	2 kV
83061	45W DC arrayLED	1250mA 39V	120-250V AC	87%	0.9	2 kV


Paramètres via l'interface DALI. Driver pour Dinamic White DT8. Niveau de gradation de 0 / 1-100%.

Settings via the DALI interface. Driver for Dinamic White DT8. dimming level from 0/1-100%.



98436 Cable and connector



98436 Cable and connector



 Connecteur Easy Plug inclus pour les codes **83066**.
Easy Plug connector included for codes **83066**.

**Omnidali** | DALI2 Multi Current

	Range	Output	Input	Eff.	PF	Surge
99373	1-12W DC arrayLED	350mA 34V	220-240V AC	84%	0.9	0,5 kV
	1.5-12W DC powerLED	500mA 24V				
	1.5-12W DC powerLED	600mA 20V				

Recommended for 6W, 8W or two 6W series items. Settings via the DALI interface. Optimisation of the DALI transmission signal. Selection of output current intensity via dip-switch. Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.

	Range	Output	Input	Eff.	PF	Surge
99362	8 W DC arrayLED	250mA 37V	220-240V AC	88%	>0.9	1 kV
	13 W DC arrayLED	350mA 37V				
	25 W DC arrayLED	700mA 37V				

Settings via the DALI interface. Optimisation of the DALI transmission signal. Selection of output current intensity via dip-switch. Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.

	Range	Output	Input	Eff.	PF	Surge
83008 / 83066	4-18W DC powerLEDs	350mA 53V	99~264V AC	92%	0.96	4 kV
	6-26W DC powerLEDs	500mA 53V				
	8-31W DC powerLEDs	600mA 53V				
	15W DC arrayLED	400mA 37V				
	25W DC arrayLED	700mA 37V				
	30W DC arrayLED	850mA 37V				
	35W DC arrayLED	950mA 37V				
	45W DC arrayLED	1200mA 37V				

Multipower driver supplied with dip-switch for the selection of the output current. Protections: against overheating and short circuits, against mains voltage spikes, against overloads. RIPPLE FREE $\leq 3\%$. On request BLS certification. Light regulation 0/1 - 100 % by means of PUSH function, 0/1...10 V interface ($I=1$ mA) or 100 Kohm potentiometer and DALI. Possibility to use PUSH function to 4/5 drivers without sync cable. Maximum length of the cable, from push button to last driver, must be max. 15 m.

	Range	Output	Input	Eff.	PF	Surge
83120	38 W DC powerLEDs	600mA 60 V	99-264V AC	92%	0.95	4 kV
	46 W DC powerLEDs	600mA 72V				


Multipower driver supplied with dip-switch for the selection of the output current. Protections: against overheating and short circuits, against mains voltage spikes, against overloads. RIPPLE FREE $\leq 3\%$. On request BIS certification. Light regulation 0/1 - 100% by means of PUSH function, 0/1...10 V interface ($I=1$ mA) or 100 Kohm potentiometer and DALI. Possibility to use PUSH function to 4/5 drivers without sync cable. Maximum length of the cable, from push button to last driver, must be max. 15 m.

	Range	Output	Input	Eff.	PF	Surge
83121	68 W DC powerLEDs	550mA 108 V	99-264V AC	92%	0.98	6 kV

Protections: against overheating and short circuits, against mains voltage spikes, against overloads. Light regulation 0/1 - 100 % by means of DALI.

INDOOR | CV-CC 0/1-10V & DALI Converter


Slim | 0/1-10V Converter

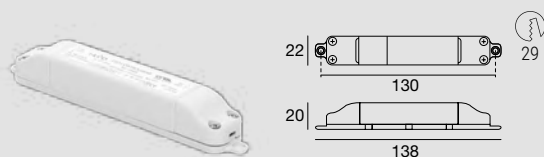

	Range	Output	Input	Eff.
99708	1.6 W powerLEDs	350mA 3-18V	24V DC	95%
99709	1.5-9 W powerLEDs	500mA 3-18V	24V DC	95%
99710	2-12 W powerLEDs	630mA 3-18V	24V DC	95%

Convertisseur 0/1-10 V. Réglages via interface 0/1-10 V ou potentiomètre. Protection à réarmement automatique contre la surchauffe, la surcharge, les circuits ouverts et les courts-circuits sur la ligne de sortie.
 Converter 0/1-10V. Settings via 0/1-10V interface or potentiometer. Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.

Slim | DALI Converter

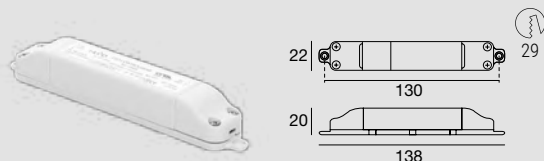


	Range	Output	Input	Eff.
99711	1.6 W powerLEDs	350mA 3-18V	24V DC	95%
99712	1.5-9 W powerLEDs	500mA 3-18V	24V DC	95%
99713	2-12 W powerLEDs	630mA 3-18V	24V DC	95%

Convertisseur DALI. Réglages via interface DALI. Protection à réarmement automatique contre la surchauffe, la surcharge, les circuits ouverts et les courts-circuits sur la ligne de sortie.
 DALI converter. Settings via the DALI interface. Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.

INDOOR | CV On/Off Driver


Slim | On/Off Driver

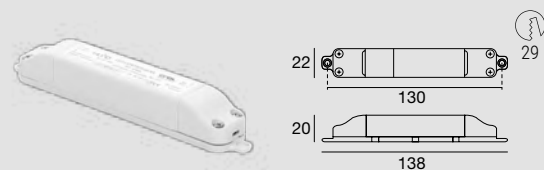

	Range	Output	Input	Eff.	PF	Surge
89408	1-5W DC stripLED 1-5W DC topLED	200mA 24V	220-240V AC	80%	0.6	4 kV

Adapté à l'alimentation de bandes de LED, LED 5 mm et topLED à tension constante. Protection à réarmement automatique contre les circuits ouverts et les courts-circuits sur la ligne de sortie.
 Suitable for powering LED strips, 5 mm LEDs and constant voltage LED top. Protection self-resetting against open circuits and short-circuits along the output line.


Fusion | On/Off Driver

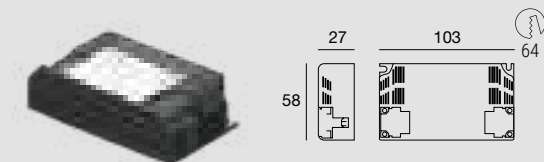

	Range	Output	Input	Eff.	PF	Surge
84829	1-24W DC stripLED 1-24W DC topLED	1A 24V	220-240V AC	88%	0.6	2 kV

Adapté à l'alimentation de bandes de LED, LED 5 mm et topLED à tension constante. Protection à réarmement automatique contre les circuits ouverts et les courts-circuits sur la ligne de sortie.
 Suitable for powering LED strips, 5 mm LEDs and constant voltage LED top. Protection self-resetting against open circuits and short-circuits along the output line.

Reson_75 | On/Off Driver

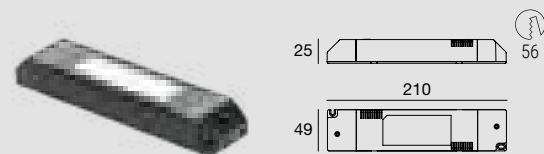


	Range	Output	Input	Eff.	PF	Surge
99374	1-75 W DC stripLED 1-75 W DC topLED	3.125A 24V	220-240V AC	91%	0.96	4 kV

Adapté à l'alimentation de bandes de LED, LED 5 mm et topLED à tension constante. Protection à réarmement automatique contre les circuits ouverts et les courts-circuits sur la ligne de sortie. Efficacité élevée, longue durée de vie et PF élevé.

Suitable for powering LED strips, 5 mm LEDs and constant voltage LED top. Protection self-resetting against open circuits and short-circuits along the output line. High efficiency, long operating life and high PF.

Velar | On/Off Driver

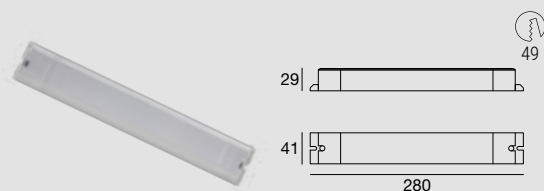

	Range	Output	Input	Eff.	PF	Surge
C-E300009	1-75 W DC stripLED 1-75 W DC topLED	1.550A 48V	220-240V AC	90%	0.96	4 kV
C-E300010	1-150 W DC stripLED 1-150 W DC topLED	3.125A 48V	220-240V AC	91%	0.97	4 kV

Adapté à l'alimentation de bandes de LED et topLED à tension constante. Protection à réarmement automatique contre les circuits ouverts et les courts-circuits sur la ligne de sortie. Efficacité élevée, longue durée de vie et PF élevé.
 Suitable for powering LED strips and constant voltage LED top. Protection self-resetting against open circuits and short-circuits along the output line. High efficiency, long operating life and high PF.

INDOOR | CV On/Off Switching

Peta | Switching Driver 50 W DC



	Type	Output	Input	Cooling	PF
99371	Peta	2.2A 24V	88-264V AC	Natural Convection	No PFC
Protection à réarmement automatique contre les circuits ouverts et les courts-circuits sur la ligne de sortie. <i>Protection self-resetting against open circuits and short-circuits along the output line.</i>					

Peta / Exa | Switching Driver 75 W DC




	Type	Output	Input	Cooling	PF
84700	Peta	3.2A 24V	88-264V AC	Natural Convection	No PFC
Protection à réarmement automatique contre les circuits ouverts et les courts-circuits sur la ligne de sortie. <i>Protection self-resetting against open circuits and short-circuits along the output line.</i>					

Peta | Switching Driver 100 W DC




	Type	Output	Input	Cooling	PF
99372	Peta	4.5A 24V	88-264V AC	Natural Convection	No PFC
Protection à réarmement automatique contre les circuits ouverts et les courts-circuits sur la ligne de sortie. <i>Protection self-resetting against open circuits and short-circuits along the output line.</i>					

Peta / Exa | Switching Driver 150 W DC

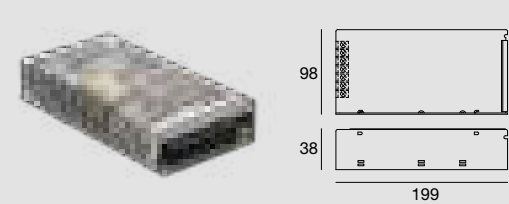


	Type	Output	Input	Cooling	PF
84701	Peta	6.5A 24V	88-264V AC	Natural Convection	No PFC
Protection à réarmement automatique contre les circuits ouverts et les courts-circuits sur la ligne de sortie. <i>Protection self-resetting against open circuits and short-circuits along the output line.</i>					

Peta / Exa | Switching Driver 200 W DC

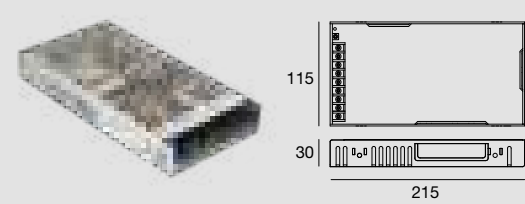

	Type	Output	Input	Cooling	PF
99682	Peta	8.4A 24V	88-264V AC	Natural Convection	0.95
Protection à réarmement automatique contre les circuits ouverts et les courts-circuits sur la ligne de sortie. <i>Protection self-resetting against open circuits and short-circuits along the output line.</i>					


Peta / Exa | Switching Driver 320 W DC

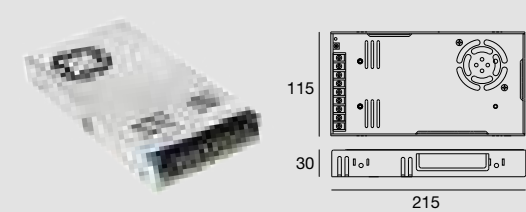

	Type	Output	Input	Cooling	PF
99683	Peta	13.4A 24V	88-264V AC	Forced Convection	0.95
99725	Exa	6.7A 48V	88-264V AC	Forced Convection	0.95

Protection à réarmement automatique contre les circuits ouverts et les courts-circuits sur la ligne de sortie.
Protection self-resetting against open circuits and short-circuits along the output line.


Peta | Switching Driver 500 W DC

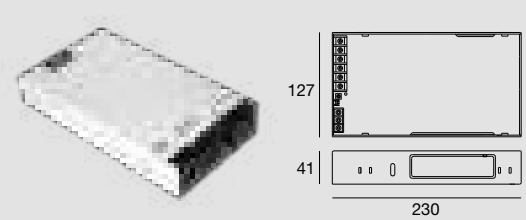

	Type	Output	Input	Cooling	PF
84787	Peta	21A 24V	88-264V AC	Forced Convection	0.95

Protection à réarmement automatique contre les circuits ouverts et les courts-circuits sur la ligne de sortie.
Protection self-resetting against open circuits and short-circuits along the output line.

Exa | Switching Driver 500 W DC

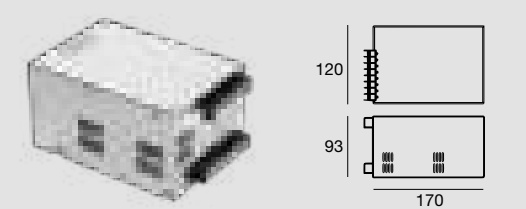


	Type	Output	Input	Cooling	PF
84626	Exa	10A 48V	88-264V AC	Forced Convection	0.95

Protection à réarmement automatique contre les circuits ouverts et les courts-circuits sur la ligne de sortie.
Protection self-resetting against open circuits and short-circuits along the output line.

INDOOR | CV Triac Driver

Triac | Driver TRIAC PUSH

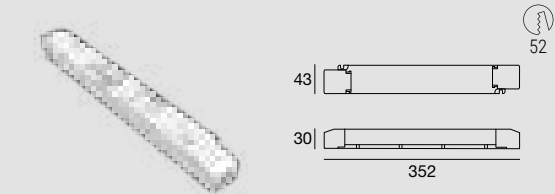


	Range	Output	Input	Eff.	PF	Surge
C-E300001	1-150W DC	6.25A 24V	220-240V AC	91%	0.99	2 kV

Driver LED à tension constante 24 V, supporte le Leading edge (Triac), le Trailing edge (ELV) ou le Push DIM de 1 % à 100 %. Sans scintillement.
24V constant voltage LED driver, supports Leading edge (Triac), Trailing edge (ELV) or Push DIM from 1% to 100%. Flicker-Free.

INDOOR | CV DALI Driver

DALIFlat Push | Driver DALI PUSH


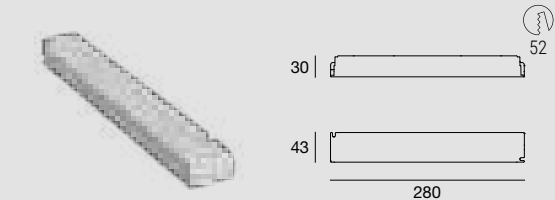


	Range	Output	Input	Eff.	PF	Surge
83062	150W DC	6.25A 24V	220-240V AC	94%	0.99	1 kV

Installation avec interface DALI. Pilote LED à tension constante de 24 V dimmable de 1 à 100% avec interface DALI ou PUSH. Flicker-Free.
Set-up via the DALI interface. 24V constant voltage LED driver dimmable from 1 to 100% via DALI or PUSH interface. Flicker-Free.

INDOOR | CV 0/1-10V, DALI & PUSH Dimmer

Bode | DALI 0/1-10V dimmer

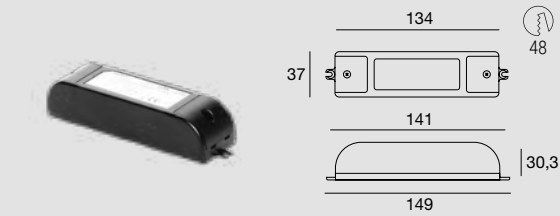


	Range	Output	Input	Eff.
99074	3ch. x (1-72 W DC stripLED/ch.) 3ch. x (1-72 W DC topLED/ch.)	3A 24V/ch.	24V DC	95%
99660	1-216 W DC stripLED 1-216 W DC topLED	9A 24V	24V DC	95%

Adapté à l'alimentation de bandes de LED, LED 5 mm et topLED à tension constante. Réglage via interface DALI, interface 0/1-10 V ou potentiomètre.

Suitable for powering LED strips and 5 mm constant voltage LED tops. Adjustment via DALI, 0/1-10V interface or potentiometer.

Bird Mini | DALI PUSH 0/1-10V dimmer

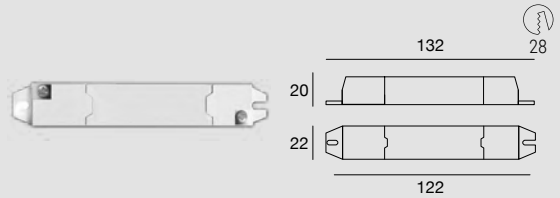


	Range	Output	Input
83041	1-72 W DC stripLED 1-144 W DC stripLED 1-288 W DC stripLED	6A 12V 6A 24V 6A 48V	12V DC 24V DC 48V DC

Adapté pour l'alimentation de produits à tension constante de 12/24/48 V. Régulation avec interface DALI, PUSH, interface de 1-10 V.

Suitable for powering 12/24/48V constant voltage products. Adjustment via DALI, PUSH 1-10V interface.

Bird Maxi | DALI PUSH 0/1-10V dimmer

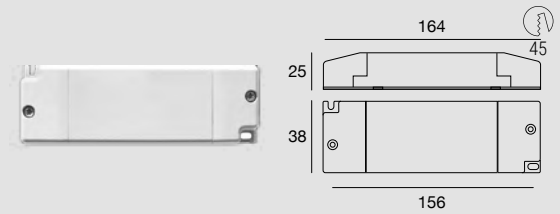


	Range	Output	Input
83042	1-144 W DC stripLED 1-288 W DC stripLED 1-576 W DC stripLED	12A 12V 12A 24V 12A 48V	12V DC 24V DC 48V DC

Adapté pour l'alimentation de produits à tension constante de 12/24 V. Régulation avec interface DALI, PUSH, interface de 0/1-10 V ou avec potentiomètre.

Suitable for powering 12/24V constant voltage products. Adjustment via DALI, PUSH 0/1-10V interface or potentiometer.

L400 | DALI PUSH 0/1-10V dimmer

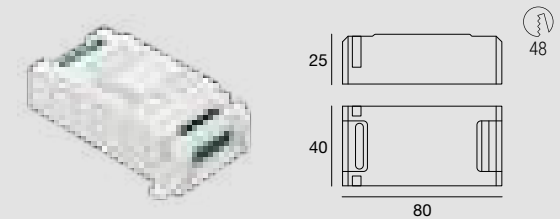

	Range	Output	Input
C-E500023	1-144 W DC stripLED 1-288 W DC stripLED 1-576 W DC stripLED	12A 12V 12A 24V 12A 48V	12V DC 24V DC 48V DC

Adapté pour l'alimentation de produits à tension constante de 12/24 V. Régulation avec interface DALI, PUSH, interface de 0/1-10 V ou avec potentiomètre.

Suitable for powering 12/24V constant voltage products. Adjustment via DALI, PUSH 0/1-10V interface or potentiometer.

OUTDOOR | CC On/Off Driver

Mini_Penny | On/Off Driver




	Range	Output	Input	Eff.	PF	Surge
89148	1-2 W DC powerLEDs	350mA 6.6V	220-240V AC	80%	0.6	0.5 kV
89149	3-6 W DC powerLEDs	350mA 20V	220-240V AC	80%	0.6	0.5 kV
89150	3-4.5 W DC powerLEDs	500mA 10V	220-240V AC	80%	0.6	0.5 kV
89151	2-4 W DC powerLEDs	630mA 6.6V	220-240V AC	80%	0.6	0.5 kV

Protection à réarmement automatique contre la surchauffe, la surcharge, les circuits ouverts et les courts-circuits sur la ligne de sortie.

Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.

Mini_Aquaed | On/Off Driver

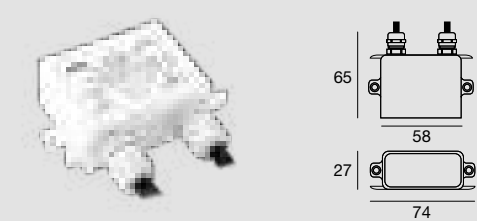


	Range	Output	Input	Eff.	PF	Surge
89419	1-2.5 W DC powerLEDs	350mA 7V	220-240V AC	55%	0.45	0.5 kV
89421	3.5-6.5 W DC powerLEDs	350mA 18V	220-240V AC	75%	0.55	0.5 kV
89422	1.5-3.5 W DC powerLEDs	500mA 7V	220-240V AC	65%	0.5	0.5 kV
89423	3-5 W DC powerLEDs	500mA 10V	220-240V AC	75%	0.5	0.5 kV
89420	2-4.5 W DC powerLEDs	630mA 7V	220-240V AC	70%	0.5	0.5 kV

Protection à réarmement automatique contre la surchauffe, la surcharge, les circuits ouverts et les courts-circuits sur la ligne de sortie.

Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.


Penny_Q | On/Off Driver

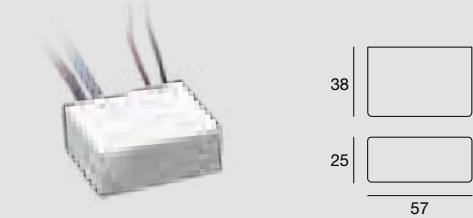

	Range	Output	Input	Eff.	PF	Surge
99716	7.5 W DC topLED	180mA 40V	220-240V AC	76%	0.6	4 kV

Smartwave™ : excellente efficacité, longue durée de vie, protection contre les surtensions, PF élevé. Protection contre la surchauffe, la surcharge, les circuits ouverts et les courts-circuits sur la ligne de sortie. Smartwave™: excellent efficiency, a long operating life, surge protection and high PF. Protection against overheating, overloading, open circuits and short-circuits along the output line.

Penny | On/Off Driver

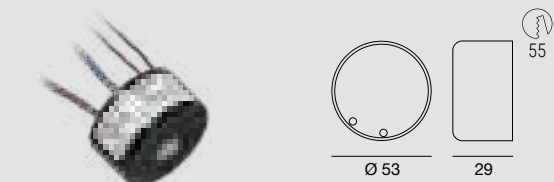

	Range	Output	Input	Eff.	PF	Surge
99177	6-12 W DC powerLEDs	350mA 39V	220-240V AC	84%	0.96	4 kV
99176	4.5-9 W DC powerLEDs	500mA 20V	220-240V AC	84%	0.96	4 kV
99175	6-12 W DC powerLEDs	630mA 20V	220-240V AC	84%	0.96	4 kV

Smartwave™ : excellente efficacité, longue durée de vie, protection contre les surtensions, PF élevé. Protection contre la surchauffe, la surcharge, les circuits ouverts et les courts-circuits sur la ligne de sortie. Smartwave™: excellent efficiency, a long operating life, surge protection and high PF. Protection against overheating, overloading, open circuits and short-circuits along the output line.

Aquaed | On/Off Driver



	Range	Output	Input	Eff.	PF	Surge
99342	3.8-8.4W DC powerLEDs	220mA 39V	220-240V AC	84%	0.6	4 kV

Protection à réarmement automatique contre la surchauffe, la surcharge, les circuits ouverts et les courts-circuits sur la ligne de sortie.

Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.

Aquaed_SLIM | On/Off Driver




	Range	Output	Input	Eff.	PF	Surge
C-E200006	6-12.5 W DC powerLEDs	350mA 17-36V	220-240V AC	>80%	0.9	2 kV
C-E200007	4.5-10W DC powerLEDs	500mA 9-20V	220-240V AC	>80%	0.9	2 kV
C-E200008	6-12.5W DC powerLEDs	630mA 9-20V	220-240V AC	>80%	0.9	2 kV

Protection à réarmement automatique contre la surchauffe, la surcharge, les circuits ouverts et les courts-circuits sur la ligne de sortie.

Self-resetting protection against overheating, overloading, open circuit and short-circuits along the output line.

Maxi_Aquaed | On/Off Driver

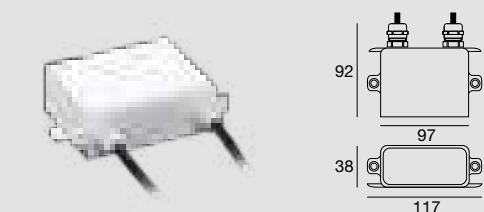

	Range	Output	Input	Eff.	PF	Surge
99185	20 W DC arrayLED 9-18 W DC powerLEDs	500mA 39V	198~264V AC	91%	0.95	4 kV
99340	20 W DC arrayLED	580mA 37V	198~264V AC	91%	0.95	4 kV
99186	20 W DC arrayLED 12-24 W DC powerLEDs	630mA 39V	198~264V AC	91%	0.95	4 kV
99269	30 W DC arrayLED	840mA 37V	198~264V AC	91%	0.95	4 kV

Smartwave™ : excellente efficacité, longue durée de vie, protection contre les surtensions, PF élevé. Protection contre la surchauffe, la surcharge, les circuits ouverts et les courts-circuits sur la ligne de sortie.

Smartwave™: excellent efficiency, a long operating life, surge protection and high PF.

Protection against overheating, overloading, open circuits and short-circuits along the output line.

P1000 | On/Off Driver




	Range	Output	Input	Eff.	PF	Surge
C-E200011	3-14W DC powerLEDs	1000mA 3-14V	220-240V AC	65%	0.65	2 kV

Protection à réarmement automatique contre la surchauffe, la surcharge, les circuits ouverts et les courts-circuits sur la ligne de sortie.

Self-resetting protection against overheating, overloading, open circuit and short-circuits along the output line.

OUTDOOR | CC DALI Driver

Aquaed_PRO | DALI2 PUSH Driver


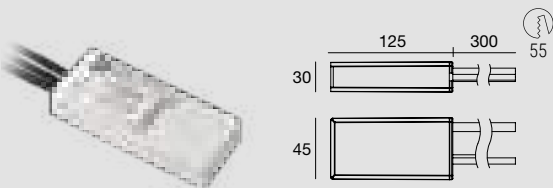


	Range	Output	Input	Eff.	PF	Surge
C-E200005	4-9W DC powerLEDs	250mA 15-36V	220-240V AC	>85%	0.93	2 kV
C-E200004	5-12.5 W DC powerLEDs	350mA 15-36V	220-240V AC	>85%	0.93	2 kV
C-E200003	7.5-18W DC powerLEDs	500mA 15-36V	220-240V AC	>85%	0.93	2 kV
C-E200002	9-21.5W DC powerLEDs	600mA 15-36V	220-240V AC	>85%	0.93	2 kV
C-E200001	10.5-25W DC powerLEDs	700mA 15-36V	220-240V AC	>85%	0.93	2 kV

Réglages via interface DALI ou Simply Dim. Optimisation du signal de transmission DALI. Protection à réarmement automatique contre la surchauffe, la surcharge, les circuits ouverts et les courts-circuits sur la ligne de sortie.

Settings via DALI interface or Simply Dim. Optimisation of the DALI transmission signal. Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.

P1000_PRO | DALI2 Driver

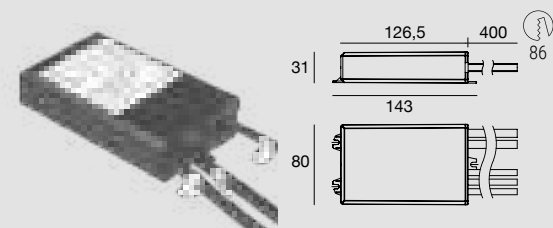


	Range	Output	Input	Eff.	PF	Surge
C-E200012	10-40W DC powerLEDs	1000mA 10-40V	220-240V AC	65%	0.65	2 kV

Réglages via interface DALI. Optimisation du signal de transmission DALI. Protection à réarmement automatique contre la surchauffe, la surcharge, les circuits ouverts et les courts-circuits sur la ligne de sortie.

Settings via DALI interface. Optimisation of the DALI transmission signal. Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.

OUTDOOR | CV On/Off Driver

Stormshield | On/Off Driver 12V

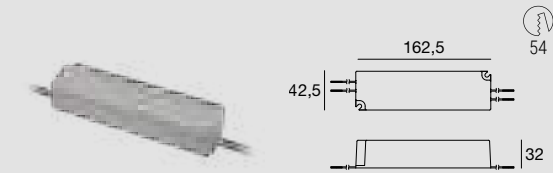


	Range	Output	Input	Eff.	PF	Surge
83010	1-60W DC	5A 12V	90-264V AC	83%	-	3 kV
Adapté pour MK68. Protection à réarmement automatique contre les circuits ouverts et les courts-circuits sur la ligne de sortie. <i>Suitable for MK68. Protection self-resetting against the open circuit and short-circuit along the output line.</i>						

Stormshield | On/Off Driver 12V




	Range	Output	Input	Eff.	PF	Surge
83013	120W DC	10A 12V	180-305V AC	87%	-	3 kV
Adapté pour MK68. Protection à réarmement automatique contre les circuits ouverts et les courts-circuits sur la ligne de sortie. <i>Suitable for MK68. Protection self-resetting against the open circuit and short-circuit along the output line.</i>						

AquaLED | On/Off Driver 24V

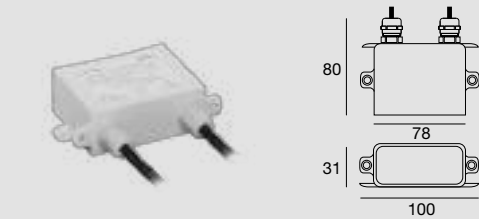


	Range	Output	Input	Eff.	PF	Surge
89488	1-14.4 W DC stripLED 1-14.4 W DC topLED	600mA 24V	220-240V AC	80%	0.6	0.5 kV
Adapté à l'alimentation de bandes de LED, LED 5 mm et topLED à tension constante. Protection à réarmement automatique contre les circuits ouverts et les courts-circuits sur la ligne de sortie. <i>Suitable for powering LED strips, 5 mm LEDs and constant voltage LED top. Protection self-resetting against open circuits and short-circuits along the output line.</i>						

Lingotto | On/Off Driver 24V

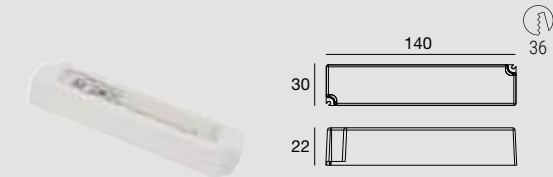


	Range	Output	Input	Eff.	PF	Surge
83009	1-18 W DC stripLED 1-18 W DC topLED	750mA 24V	220-240V AC	82%	0.6	3 kV
Adapté à l'alimentation de bandes de LED, LED 5 mm et topLED à tension constante. Protection à réarmement automatique contre les circuits ouverts et les courts-circuits sur la ligne de sortie. <i>Suitable for powering LED strips, 5 mm LEDs and constant voltage LED top. Protection self-resetting against open circuits and short-circuits along the output line.</i>						

Maxi_AquaLED | On/Off Driver 24V

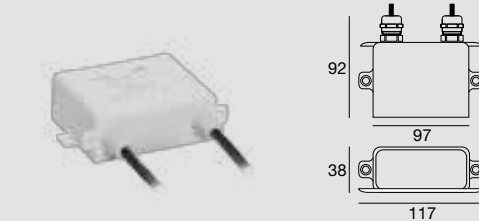

	Range	Output	Input	Eff.	PF	Surge
89179	1-24 W DC stripLED 1-24 W DC topLED	1A 24V	220-240V AC	88%	0.6	2 kV
Adapté à l'alimentation de bandes de LED, LED 5 mm et topLED à tension constante. Protection à réarmement automatique contre les circuits ouverts et les courts-circuits sur la ligne de sortie. <i>Suitable for powering LED strips, 5 mm LEDs and constant voltage LED top. Protection self-resetting against open circuits and short-circuits along the output line.</i>						

Giant_AquaLED | On/Off Driver 24V

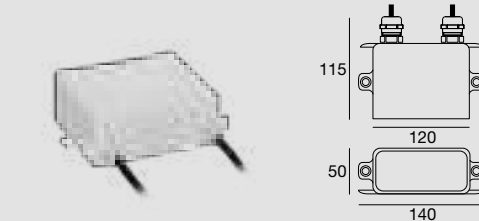

	Range	Output	Input	Eff.	PF	Surge
89359	1-48 W DC stripLED 1-48 W DC topLED	2A 24V	220-240V AC	89%	0.6	1 kV
Adapté à l'alimentation de bandes de LED, LED 5 mm et topLED à tension constante. Protection à réarmement automatique contre les circuits ouverts et les courts-circuits sur la ligne de sortie. <i>Suitable for powering LED strips, 5 mm LEDs and constant voltage LED top. Protection self-resetting against open circuits and short-circuits along the output line.</i>						

Reson_150 | On/Off Driver 24V




	Range	Output	Input	Eff.	PF	Surge
99331	1-150 W DC stripLED	6.25A 24V	220-240V AC	95%	0.98	5 kV
	1-150 W DC topLED					

Adapté à l'alimentation de bandes de LED, LED 5 mm et topLED à tension constante. Protection à réarmement automatique contre les circuits ouverts et les courts-circuits sur la ligne de sortie. Efficacité élevée, longue durée de vie et PF élevé.

Suitable for powering LED strips, 5 mm LEDs and constant voltage LED top. Protection self-resetting against open circuits and short-circuits along the output line. High efficiency, long operating life and high PF.



Stormshield | On/Off Driver 24 V

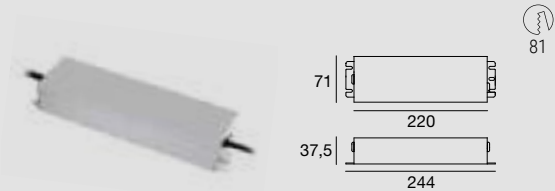


	Range	Output	Input	Eff.	PF	Surge
99786	1-240 W DC stripLED	10A 24V	220-240V AC	92%	0.95	6 kV
	1-240 W DC topLED					

Adapté à l'alimentation de bandes de LED, LED 5 mm et top LED à tension constante. Protection à réarmement automatique contre les circuits ouverts et les courts-circuits sur la ligne de sortie.

Suitable for powering LED strips, 5 mm LEDs and constant voltage LED top. Protection self-resetting against the open circuit and the short-circuit along the output line.

Stormshield | On/Off Driver 48 V

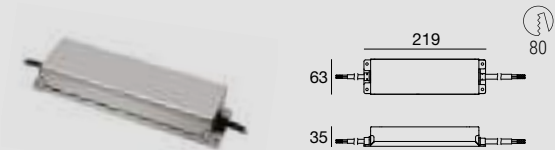


	Range	Output	Input	Eff.	PF	Surge
99784	1-150 W DC	3.13A 48V	180-295V AC	91%	0.95	6 kV

Adapté à l'alimentation de bandes de LED, LED 5 mm et top LED à tension constante. Protection à réarmement automatique contre les circuits ouverts et les courts-circuits sur la ligne de sortie.

Suitable for powering LED strips, 5 mm LEDs and constant voltage LED top. Protection self-resetting against the open circuit and the short-circuit along the output line.

Stormshield | On/Off Driver 48 V

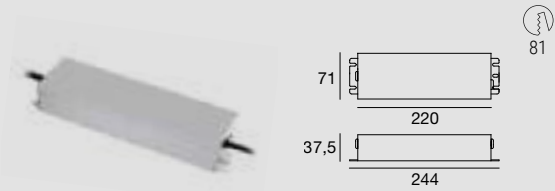

	Range	Output	Input	Eff.	PF	Surge
99785	1-240 W DC	5A 48V	220-240V AC	92%	0.95	2 kV

Adapté à l'alimentation de bandes de LED, LED 5 mm et top LED à tension constante. Protection à réarmement automatique contre les circuits ouverts et les courts-circuits sur la ligne de sortie.

Suitable for powering LED strips, 5 mm LEDs and constant voltage LED top. Protection self-resetting against the open circuit and the short-circuit along the output line.

OUTDOOR | CC-CV On/Off Converter

Round | On/Off Converter



	Range	Output	Input	Eff.
89175	1-3 W DC powerLEDs	350mA 12V	12V DC	95%
	1-6 W DC powerLEDs	350mA 24V	24V DC	95%
89176	1.5-4.5 W DC powerLEDs	500mA 12V	12V DC	95%
	1.5-9 W DC powerLEDs	500mA 24V	24V DC	95%
89177	2-6 W DC powerLEDs	630mA 12V	12V DC	95%
	2-12 W DC powerLEDs	630mA 24V	24V DC	95%

Protection contre la surchauffe, la surcharge, les circuits ouverts et les courts-circuits sur la ligne de sortie.
Protection against overheating, overloading, open circuits and short-circuits along the output line.

OUTDOOR | CV 0/1-10V Driver

Reson_150 | 0/1-10V Driver 24 V



	Range	Output	Input	Eff.	PF	Surge
99332	1-150 W DC stripLED	6.25A 24V	220-240V AC	95%	0.98	5 kV
	1-150 W DC topLED					

Adapté à l'alimentation de bandes de LED, LED 5 mm et topLED à tension constante. Protection à réarmement automatique contre les circuits ouverts et les courts-circuits sur la ligne de sortie. Efficacité élevée, longue durée de vie et PF élevé. Réglage via interface ou potentiomètre 0/1-10 V.

Suitable for powering LED strips, 5 mm LEDs and constant voltage LED top. Protection self-resetting against open circuits and short-circuits along the output line. High efficiency, long operating life and high PF. Adjustment via 0/1-10V interface or potentiometer.

OUTDOOR | CV DALI Driver

Stormshield | DALI Driver 12V



	Range	Output	Input	Eff.	PF	Surge
83015	120W DC	10A 12V	90-305V AC	88%	0.9	2 kV

Réglages via interface DALI. Protection à réarmement automatique contre la surchauffe, la surcharge, les circuits ouverts et les courts-circuits sur la ligne de sortie.

Settings via the DALI interface. Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.

Stormshield | DALI Driver 12V




	Range	Output	Input	Eff.	PF	Surge
83012	60W DC	5A 12V	90-305V AC	86%	0.9	2 kV

Réglages via interface DALI. Protection à réarmement automatique contre la surchauffe, la surcharge, les circuits ouverts et les courts-circuits sur la ligne de sortie.

Settings via the DALI interface. Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.

Stormshield | DALI Driver 24 V


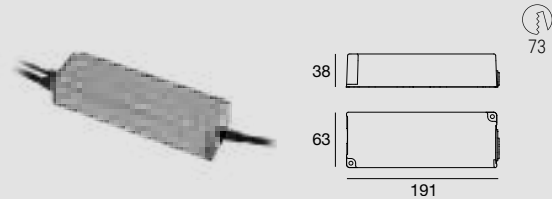


	Range	Output	Input	Eff.	PF	Surge
99722	1-120 W DC stripLED	5A 24V	220-240V AC	90%	0.9	2 kV

Réglages via interface DALI. Protection à réarmement automatique contre la surchauffe, la surcharge, les circuits ouverts et les courts-circuits sur la ligne de sortie.

Settings via the DALI interface. Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.

Power | DALI2 PUSH driver 24V

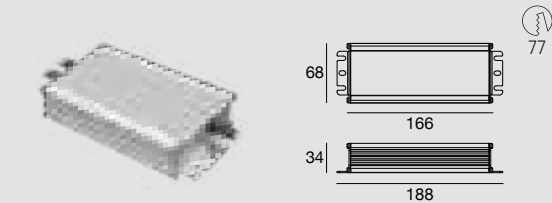


	Range	Output	Input	Eff.	PF	Surge
83333	1-150 W DC stripLED	6.3A 24V	90-305V AC	90%	0.9	6 kV

Réglages via interface DALI2 ou PUSH. Optimisation du signal de transmission DALI. Adapté à l'alimentation de bandes de LED, LED 5 mm et top LED à tension constante. Protection à réarmement automatique contre la surchauffe, la surcharge, les circuits ouverts et les courts-circuits sur la ligne de sortie.

Settings via DALI2 or PUSH interface. Optimisation of the DALI transmission signal. Suitable for powering LED strips, 5 mm LEDs and constant voltage LED top. Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.

Power | DALI2 PUSH driver 24V


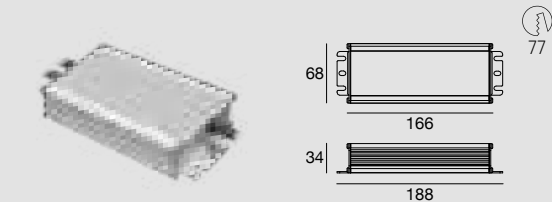


	Range	Output	Input	Eff.	PF	Surge
C-E400002	1-240 W DC stripLED	10A 24V	90-305V AC	90%	0.9	6 kV

Réglages via interface DALI2 ou PUSH. Optimisation du signal de transmission DALI. Adapté à l'alimentation de bandes de LED, LED 5 mm et top LED à tension constante. Protection à réarmement automatique contre la surchauffe, la surcharge, les circuits ouverts et les courts-circuits sur la ligne de sortie.

Settings via DALI2 or PUSH interface. Optimisation of the DALI transmission signal. Suitable for powering LED strips, 5 mm LEDs and constant voltage LED top. Protection self-resetting against overheating, overloading, open circuits and short-circuits along the output line.

Power | DALI2 PUSH driver 48V

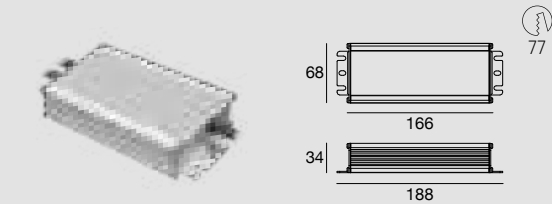


	Range	Output	Input	Eff.	PF	Surge
C-E400003	1-150 W DC stripLED	3.2A 48V	90-305V AC	90%	0.9	6 kV

Réglages via l'interface DALI2 ou PUSH. Optimisation du signal de transmission DALI. Convient pour l'alimentation de bandes et de tops LED à une tension constante de 48 V. Protection à réarmement automatique contre les surtempératures, la surcharge, le circuit ouvert et le court-circuit le long de la ligne de sortie.

Settings via DALI2 or PUSH interface. Optimisation of the DALI transmission signal. Suitable for powering strip LEDs and top LEDs at constant 48V voltage. Self-resetting protection against overheating, overloading, open circuit and short-circuits along the output line.

Master Triac


Phasecon | TRIAC controller



	Comand	Output	Input	Connector
KIT0026	Push DIM	100W	220-240V AC	CLAMP

Gradateur à coupure de phase, via bouton NO. Sélecteurs rotatifs pour le choix de la gradation et des temps de montée et de descente.
Phase Cut Dimmer, via N/A button. Rotating selectors for the choice of dimming and ascent and descent time.

Phasecon | TRIAC controller





	Comand	Output	Input	Connector
KIT0027	Push DIM	350W	220-240V AC	CLAMP

Gradateur à coupure de phase, via bouton NO. Sélecteurs rotatifs pour le choix de la gradation et des temps de montée et de descente. Configuration AUTO qui permet la gradation de tout type de lampe à 230 VAC.
Phase Cut Dimmer, via N/A button. Rotating selectors for the choice of dimming and ascent and descent time. AUTO configuration that enables the dimming of any type of 230V AC lamp.

Master DALI


Dali_PS1 | DALI power Supply



	Type	Signal Output	Input	Connector
99309		DALI 15-16V DC	220-240V AC	CLAMP

Alimentation pour BUS DALI de 200 mA, pour appareils DALI ou modules de contrôle sans alimentation propre.
Power supply for 200 mA DALI BUS, for DALI devices, or control modules without own power supply.


Dali_PS2 | DALI power Supply



	Type	Signal Output	Input	Connector
99310		DALI 15-16V DC	220-240V AC	CLAMP

Alimentation pour BUS DALI de 240 mA, pour appareils DALI ou modules de contrôle sans alimentation propre. Alimentation adaptée au montage sur rail DIN Omega 35 mm.
Power supply for 240 mA DALI BUS, for DALI devices, or control modules without own power supply. Power supply suitable for mounting on 35 mm Omega DIN rail.



Dali_PS3 | DALI power Supply



	Type	Signal Output	Input	Connector
C-E300002		DALI 15-16V DC	220-240V AC	CLAMP

Alimentation pour BUS DALI de 70 mA, pour appareils DALI ou modules de contrôle sans alimentation propre.
Power supply for 70 mA DALI BUS, for DALI devices, or control modules without own power supply.

Dali_USB | DALI Controller




Type	Signal Output	Input	Connector
99308	DALI	4.5-5V DC	CLAMP USB

Interface PC/DALI. Elle permet de connecter le PC au système DALI pour effectuer l'adressage de chaque driver et gérer les scénarios et les groupes. Le système doit être complété du logiciel gratuit « MasterCONFIGURATOR ». Alimentation via câble DALI et interface USB.

PC/DALI interface. It allows the PC to interface with the DALI system and to address individual drivers, managing scenes and groups. The system must be integrated with the free "MasterCONFIGURATOR" software. Powered by DALI cable and USB interface.

Dali_XC | DALI Controller




Type	Signal Output	Input	Connector
99311	DALI	15-16V DC	CLAMP

4 entrées indépendantes pour contacts/boutons NO. Mode de fonctionnement réglable via 2 sélecteurs rotatifs. Possibilité de connecter plusieurs DALI XC sur la ligne DALI. Alimentation via câble DALI. Câbles de connexion (longueur 25 cm, de couleurs correspondant aux bornes) inclus.

4 independent inputs for N/O contacts/buttons. Operating mode adjustable via 2 rotary switches. Possibility of connecting multiple DALI MSensors in a group and on the DALI line. Power supply via DALI cable. Connection cables, with a length of 25 cm, depending on the colours of the terminal, included.

Master Easy NFC | DALI Controller




Type	Signal Output	Input	Connector
C-E700032	DALI	220-240V AC	CLAMP


4 entrées indépendantes pour contacts/boutons N/O. Mode de fonctionnement réglable via APP et NFC. Possibilité de connecter plusieurs dispositifs de contrôle sur la ligne DALI. Alimentation DALI incluse. Câbles de connexion des boutons, longueur de 10 m. Gestion des drivers DT6 et DT8. Contrôles dynamiques pour le cycle circadien et Dim to Warm. Possibilité d'adresser individuellement jusqu'à 32 drivers sur une seule ligne.

4 independent inputs for N/O contacts/buttons. Operating mode adjustable via APP and NFC. Possibility to connect multiple control devices on the DALI line. DALI power supply included. Button connection cables, 10 m length. Management of DT6 and DT8 drivers. Dynamic controls for circadian cycle and Dim to Warm. Possibility to individually address up to 32 drivers on a single line.


DAPHne | DALI Phase Dimmer CV

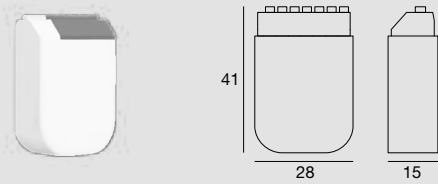


DAPHne | DALI Phase Dimmer CV

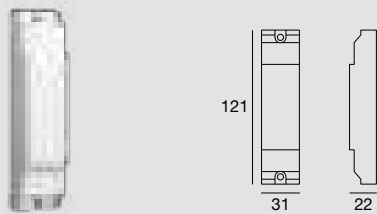

BasicDIM DGC | Digital Controller

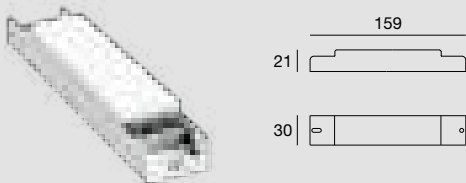

BasicDIM DGC | Sensor 5DPI 14rc

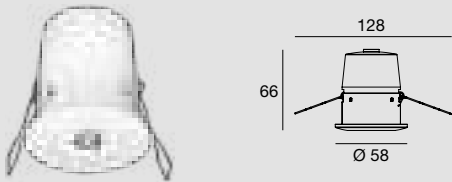

BasicDIM DGC | Full Programmer




BasicDIM DGC | Easy Programmer



	Type	Signal Output	Input	Connector
C-E700013		Phase Dimmer (DT4) 3-25W	DALI + 220-240V AC	CLAMP

Adapté pour la gradation des ampoules LED retrofit de 230V via DALI (Device Typc 4). Différents types pour des charges de 3W à 25W (PD) pour installation en boîte de dérivation et pour 10-300W (PD300) pour plafond distant. Conversion du niveau de gradation DALI en une tension contrôlée par coupure de phase (montante/descendante).

Suitable for dimming of 230V LED retrofit-bulbs via DALI (Device Typc 4). Different types for loads from 3W to 25W (PD) for back box installation and for 10-300W (PD300) for remote ceiling. Conversion of the DALI dimlevel into a phase cut controlled voltage (trailing/leading edgc).



	Type	Signal Output	Input	Connector
C-E700014		Phase Dimmer (DT4) 10-300W	DALI + 220-240V AC	CLAMP

Adapté pour la gradation des ampoules LED retrofit de 230V via DALI (Device Typc 4). Différents types pour des charges de 3W à 25W (PD) pour installation en boîte de dérivation et pour 10-300W (PD300) pour plafond distant. Conversion du niveau de gradation DALI en une tension contrôlée par coupure de phase (montante/descendante).

Suitable for dimming of 230V LED retrofit-bulbs via DALI (Device Typc 4). Different types for loads from 3W to 25W (PD) for back box installation and for 10-300W (PD300) for remote ceiling. Conversion of the DALI dimlevel into a phase cut controlled voltage (trailing/leading edgc).



	Type	Signal Output	Input	Connector
83115		DALI/DSI	220-240V AC	CLAMP

2 sorties de contrôle de broadcast pour 10 + 10 pilotes DALI \ DSI. Possibilité de programmation via le programmeur TLC FULL 83118 ou via le logiciel gratuit "MasterCONFIGURATOR"

2 broadcast control outputs for 10 + 10 DALI \ DSI drivers. Possibility of programming via TLC FULL programmer 83118 or via free "MasterCONFIGURATOR" sofware.



	Type	Signal Output	Input	Connector
83116		DALI/DSI	15-16V DC	CLAMP

Capteur LUX \ PIR, maximum 4 capteurs connectés à un contrôleur 83115. Possibilité de programmation via le programmeur TLC FULL 83118 ou via le logiciel gratuit "MasterCONFIGURATOR".

LUX \ PIR sensor, maximum 4 sensors connected to a 83115 digital controller. Possibility of programming via TLC FULL programmer 83118 or via free "MasterCONFIGURATOR" sofware.



	L x W x H
83118	130x56x15

Télécommande de programmation pour 83115 et 83116. Fonctions de programmation: niveaux de luminosité et temps de retard pour l'allumage et l'extinction, possibilité de désactiver LUX ou \ et capteur PIR.

Programming remote control for 83115 and 83116. Programming functions: brightness levels and delay time for switching on and off, possibility to deactivate LUX or \ and PIR sensor.




	L x W x H
83119	86.5x40.5x72

Télécommande pour la gestion des 83115 et 83116. Fonctionnalité d'activation, de désactivation et de gradation. Activation de la commande d'éclairage automatique (LUX).

Remote control for 83115 and 83116 management. On, Off and Dimming functionality. Activation of automatic lighting control (LUX).

Dimmer CC radio frequency

Smart_PRO CC | RF remote

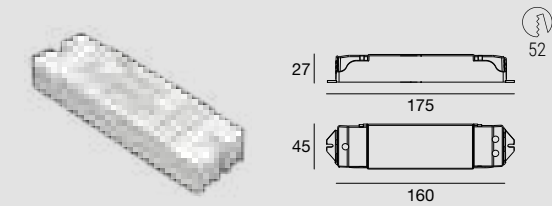

RF Remote



C-W600001

- Fonctions de télécommande RF :**

 - ON/OFF
 - gradation
 - vitesse
- RF remote control functions:**

 - ON/OFF
 - dimming
 - speed



	Range	Output	Input
C-E700003	4ch. x (4.6-9.2 W powerLED/ch.)	220mA 21-42V	48V DC
	4ch. x (6.5-12.5 W powerLED/ch.)	300mA 21-42V	
	4ch. x (7-14.5 W arrayLED/ch.)	350mA 21-42V	
	4ch. x (8.4-17 W powerLED/ch.)	400mA 21-42V	
	4ch. x (10.5-21 W powerLED/ch.)	500mA 21-42V	
	4ch. x (13-26 W powerLED/ch.)	630mA 21-42V	
	4ch. x (14.5-29.5 W arrayLED/ch.)	700mA 21-42V	
	4ch. x (17.5-35 W arrayLED/ch.)	840mA 21-42V	
	4ch. x (20-40W arrayLED/ch.)	950mA 21-42V	
	4ch. x (21-42W arrayLED/ch)	1000mA 21-42V	
	4ch. x (2.5-4 W powerLED/ch.)	220mA 12-18V	
	4ch. x (4-6 W powerLED/ch.)	350mA 12-18V	
	4ch. x (6-9 W powerLED/ch.)	500mA 12-18V	
	4ch. x (11-17 W powerLED/ch.)	630mA 12-18V	
	4ch. x (3 W powerLED/ch.)	350mA 6-9V	12V DC
	4ch. x (4.5 W powerLED/ch.)	500mA 6-9V	
	4ch. x (6 W powerLED/ch.)	700mA 6-9V	


	24V DC		48V DC
99371	Peta 50 W Switching	99784	Mean 150 W Switching IP65
84700	Peta 75 W Switching	99785	Mean 240 W Switching IP65
99374	Reson 75 W Driver		

Gradation via télécommande à fréquence radio, simple bouton NO ou réseau wi-fi (Tuya smart APP). Appareil avec 4 canaux, premier commutateur DIP dédié pour la sélection du courant et second commutateur DIP dédié pour les configurations : MONO, DYNAMIC, RGB, RGBW. Protection contre la surchauffe, la surcharge, les circuits ouverts et les courts-circuits sur la ligne de sortie.

Dimming via radio frequency remote control, single N/A button or wi-fi network (Tuya smart APP). Device with 4 channels, the first dip switch dedicated for current selection and the second dip switch dedicated for configuration: MONO, DYNAMIC, RGB, RGBW. Protection against overheating, overloading, open circuits and short-circuits along the output line.

Dimmer CV radio frequency

Smart_PRO CV | RF remote

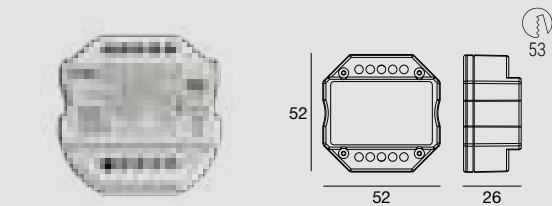

RF Remote



C-W600001

- Fonctions de télécommande RF :**

 - ON/OFF
 - gradation
 - vitesse
- RF remote control functions:**

 - ON/OFF
 - dimming
 - speed



	Range	Output	Input
C-E700002	MONO stripLED	3A x 4ch. 12-24-48V	12-24-48V DC
	DYNAMIC stripLED	3A x 4ch. 12-24-48V	12-24-48V DC
	RGB/RGBW stripLED	3A x 4ch. 12-24-48V	12-24-48V DC

	24V DC		24V DC
99371	Peta 50 W Switching	99331	Reson 150 W Driver
84700	Peta 75 W Switching	99786	Mean 240 W Switching
99374	Reson 75 W Driver		


	48V DC
99784	Mean 150 W Switching IP65
99785	Mean 240 W Switching IP65

Variation de luminosité via une télécommande à radiofréquence, un bouton unique N/A ou un réseau Wi-Fi (application Tuya Smart). Dispositif avec 4 canaux et un dip switch dédié pour la configuration : MONO, DYNAMIC, RGB, RGBW. Protection contre les surchauffes, les surcharges, les circuits ouverts et les courts-circuits le long de la ligne de sortie.

Dimming via radio frequency remote control, single N/A button, or Wi-Fi network (Tuya smart APP). Device with 4 channels and a dedicated dip switch for configuration: MONO, DYNAMIC, RGB, RGBW. Protection against overheating, overload, open circuit, and short circuit along the output line.

Dimmer CV SPI

Smart SPI | Controller SPI

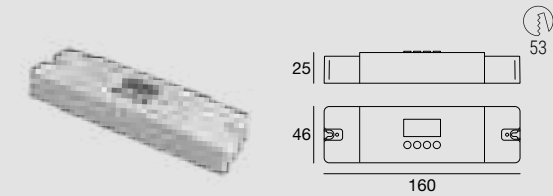

RF Remote




C-W600001

- Fonctions de télécommande RF :**

 - ON/OFF
 - gradation
 - vitesse
- RF remote control functions:**

 - ON/OFF
 - dimming
 - speed


Smart SPI | Controller SPI + RF Remote

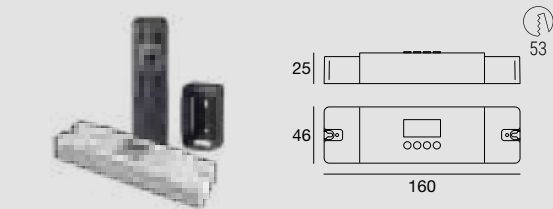

RunPix | Controller SPI & BT



PixRubber | Controller DMX SPI

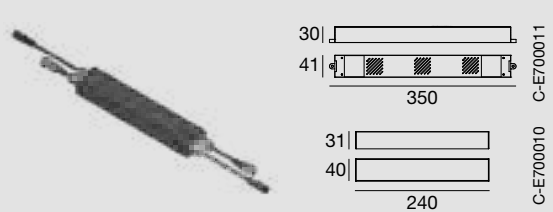

	Range	Output	Input
C-E700001	Rubber Pixel RGBW	4out SPI 512ch	12-24V DC

Quatre sorties SPI, jusqu'à un maximum de 128 pixels (16 mètres) par sortie. Panneau frontal avec boutons de commande, pouvant également être utilisé avec la télécommande RF pour la sélection du mode, du programme et de la vitesse. Avec fonction de mémorisation du dernier état à chaque commutation. Programmes : 7 modes d'effets statiques, 127 modes de cycles automatiques. Fonction maître et esclave via le fil blindé 84865.


Four SPI outputs, up to a maximum of 128 pixels (16 metres) per output. Front panel with control buttons, can also be used with the RF remote control to select mode, programs and speed. With memory function that saves the last status when switched off. Programs: 7 static effect modes, 127 automatic cycle modes. Master and Slave function via shielded wire 84865.



	Range	Output	Input
C-E700004	Rubber Pixel RGBW	4 out SPI 512ch	12-24V DC

Quatre sorties SPI, jusqu'à un maximum de 128 pixels (16 mètres) par sortie. Panneau frontal avec boutons de commande, pouvant également être utilisé avec la télécommande RF pour la sélection du mode, du programme et de la vitesse. Avec fonction de mémorisation du dernier état à chaque commutation. Programmes : 7 modes d'effets statiques, 127 modes de cycles automatiques. Fonction maître et esclave via le fil blindé 84865.

Four SPI outputs, up to a maximum of 128 pixels (16 metres) per output. Front panel with control buttons, can also be used with the RF remote control to select mode, programs and speed. With memory function that saves the last status when switched off. Programs: 7 static effect modes, 127 automatic cycle modes. Master and Slave function via shielded wire 84865.



	Range	Output	Input
C-E700037	Rubber Pixel RGBW	1 out SPI 1024ch	24V DC

Contrôleur pour bande LED Pixel à Pixel avec effet « RUN ». Démarrage et arrêt du spectacle via bouton N/O. Longueur de la bande, direction et vitesse programmables via l'application NewlabForrest. Sorties de synchronisation : SPI x 1. Possibilité de définir les paramètres de contrôle des bandes LED en les sélectionnant dans une liste préconfigurée et testée par Newlab, ou manuellement, en choisissant le type de protocole et le mode de couleur compatible avec la bande LED installée. Réglage de la gradation via l'application Forrest ou par pression prolongée du bouton.

Controller for Pixel to Pixel LED strip with "RUN" effect. Show start and stop via N/O button. Strip length, direction, and speed programmable via NewlabForrest APP. Synchronization outputs: SPI x 1. Possibility to set control parameters for LED strips by selecting them from a preconfigured and tested list by Newlab, or manually, choosing the type of protocol and color mode compatible with the installed LED strip. Dimming setting via Forrest app or by long pressing the button.




	Range	IP	Output	Input
C-E700011	Rubber Pixel RGBW	IP 40	1 out SPI 1024ch	24V DC
C-E700010	Rubber Pixel RGBW	IP 65		

Contrôleur SPI avec entrée DMX OU DMX2048. Sortie unique SPI. Jusqu'à 128 pixels (16 mètres) peuvent être connectés avec des maîtres DMX standard. Jusqu'à un maximum de 256 pixels (32 mètres) avec le maître IL&D DMX2048. Configuration via l'adresse dmx/rdm C-E700026.

SPI controller with DMX or DMX2048 input. Single SPI output. Possibility of connecting up to a maximum of 128 pixels (16 metres) with standard DMX master. Up to a maximum of 256 pixels (32 metres) with IL&D DMX2048 master. Configuration via dmx/rdm C-E700026 addresser.

Dimmer CC & CV DALI DT8


Optidimm RGBW | DALI 4ch DT8

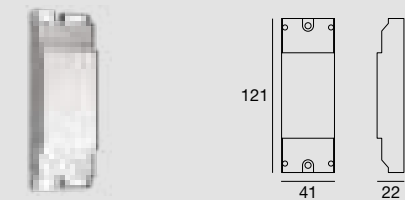

	Range	Output	Input
C-E500007	4ch x 3/6/12W	250mA	12/24/48V DC
C-E500008	4ch x 4/8/16W	350mA	12/24/48V DC
C-E500009	4ch x 6/12/24W	500mA	12/24/48V DC
C-E500010	4ch x 8/16/33W	700mA	12/24/48V DC
	12V DC switching		24V DC switching
83010	Mean 60 W	99371	Peta 50 W
83013	Mean 120 W	84700	Peta 75 W
	48V DC switching	99374	Reson 75 W
99784	Mean 150 W	99331	Reson 150 W
99785	Mean 240 W		

Convient à l'alimentation de produits à courant constant 12/24/48 V. Contrôle via l'interface DALI DT8. Quatre canaux de sortie. Fonctions de gradation, RGB, RGBW.
Suitable for powering 12/24/48V constant current products. Adjustment via DALI DT8 interface. Four output channels. Dimming, RGB, RGBW functions.


Optidimm DW | DALI 4ch DT8

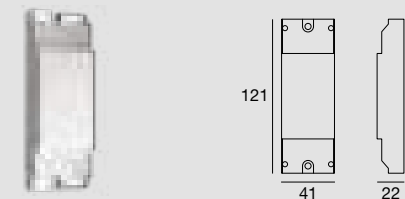

	Range	Output	Input
C-E500004	4ch x 4/8/16W	350mA	12/24/48V DC
C-E500005	4ch x 6/12/24W	500mA	12/24/48V DC
C-E500006	4ch x 8/16/33W	700mA	12/24/48V DC
	12V DC switching		24V DC switching
83010	Mean 60 W	99371	Peta 50 W
83013	Mean 120 W	84700	Peta 75 W
	48V DC switching	99374	Reson 75 W
99784	Mean 150 W	99331	Reson 150 W
99785	Mean 240 W		

Convient à l'alimentation de produits à courant constant 12/24/48 V. Contrôle via l'interface DALI DT8. Quatre canaux de sortie. Fonctions de gradation, blanc dynamique.
Suitable for powering 12/24/48V constant current products. Adjustment via DALI DT8 interface. Four output channels. Dimming, dynamic white functions.


Optidimm CV | DALI RGBW DW DT8

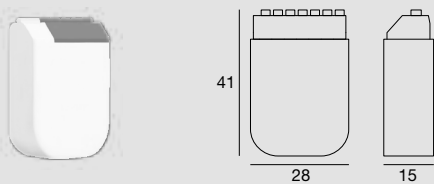

	Range	Type	Output	Input
C-E700015	1-96 W DC	Dynamic white	8A 12V	12V DC
	1-192W DC		8A 24V	24V DC
	1-384 W DC		8A 48V	48V DC
C-E700017	1-96 W DC	RGB/RGBW	8A 12V	12V DC
	1-192W DC		8A 24V	24V DC
	1-384 W DC		8A 48V	48V DC
	24V DC switching			48V DC switching
99786	Mean 240 W		99784	Mean 150 W
			99785	Mean 240 W

Convient à l'alimentation de produits à tension constante 12/24/48 V. Version pour blanc dynamique et RGB/RGBW. Régulation via DALI DT8 et interface PUSH.
Suitable for powering 12/24/48V constant voltage products. Version for Dynamic white and RGB/RGBW. Adjustment via DALI DT8 and PUSH interface.

Optidimm CV | DALI RGBW DW DT8

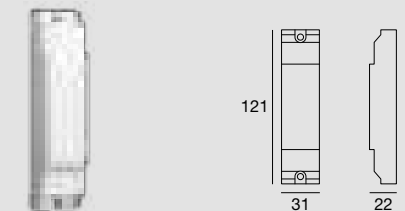


	Range	Type	Output	Input
C-E700016	1-120 W DC	Dynamic white	10A 12V	12V DC
	1-240W DC		10A 24V	24V DC
	1-480 W DC		10A 48V	48V DC
C-E700018	1-120 W DC	RGB/RGBW	10A 12V	12V DC
	1-240W DC		10A 24V	24V DC
	1-480 W DC		10A 48V	48V DC
	24V DC switching			48V DC switching
99786	Mean 240 W		99784	Mean 150 W
			99785	Mean 240 W

Convient à l'alimentation de produits à tension constante 12/24/48 V. Version pour blanc dynamique et RGB/RGBW. Régulation via DALI DT8 et interface PUSH.
Suitable for powering 12/24/48V constant voltage products. Version for Dynamic white and RGB/RGBW. Adjustment via DALI DT8 and PUSH interface.

Dimmer CC & CV DALI DT6

Lumiquad PRO | DALI 4ch DT6

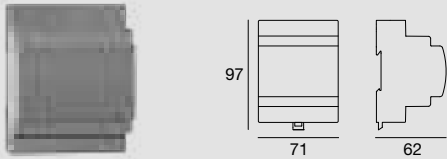


	Range	Output	Input
C-E500017	4ch x 3/6/12W	250mA	12/24/48V DC
	4ch x 4/8/16W	350mA	12/24/48V DC
	4ch x 6/12/24W	500mA	12/24/48V DC
	4ch x 8/16/33W	700mA	12/24/48V DC
	12V DC switching		24V DC switching
83010	Mean 60 W	99371	Peta 50 W
83013	Mean 120 W	84700	Peta 75 W
		99374	Reson 75 W
		99331	Reson 150 W
	48V DC switching		
99784	Mean 150 W		
99785	Mean 240 W		

Convient à l'alimentation de produits à courant constant 12/24/48 V. Régulation via interface DALI DT6, PUSH, interface 0/1-10 V et potentiomètre. Quatre canaux de sortie. Fonctions de gradation Warm Tune, blanc dynamique, RGB, RGBW. L'adresse actuelle et l'adresse DALI peuvent être réglées via un commutateur rotatif ou via DALI.

Suitable for powering 12/24/48V constant current products. Adjustment via DALI DT6, PUSH interface, 0/1-10V interface and potentiometer. Four output channels. Warm tune, dynamic white, RGB, RGBW dimming functions. DALI address and current settable via rotary switch or via DALI.

Lumiquad | Mono CV DALI 1ch DT6

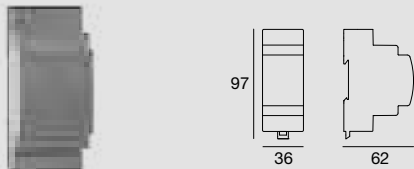


	Range	Output	Input
C-E500016	1-78 W DC	6.5A 12V	12V DC
	1-156 W DC	6.5A 24V	24V DC
	1-312 W DC	6.5A 48V	48V DC
	24V DC switching		48V DC switching
99374	Reson 75 W	99784	Mean 150 W
99331	Reson 150 W	99785	Mean 240 W

Convient à l'alimentation de produits à tension constante 12/24/48 V. Régulation via interface DALI DT6, PUSH, interface 0/1-10 V. Quatre canaux de sortie. Fonctions de gradation Warm Tune, blanc dynamique, RGB, RGBW. Adresse DALI réglable par commutateur rotatif ou par DALI.

Suitable for powering 12/24/48V constant voltage products. Adjustment via DALI DT6, PUSH interface, 0/1-10V interface. Four output channels. Warm tune, dynamic white, RGB, RGBW dimming functions. DALI address settable via rotary switch or via DALI.

Lumiquad mini | CV DALI 4ch DT6

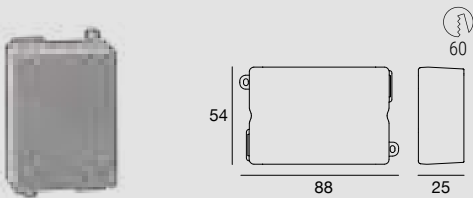


	Range	Output	Input
C-E500019	4ch. x (1-30 W DC/ch.)	2.5A 12V/ch	12V DC
	4ch. x (1-60 W DC/ch)	2.5A 24V/ch	24V DC
	24V DC switching		
99374	Reson 75 W		
99331	Reson 150 W		

Convient à l'alimentation de produits à tension constante 12/24 V. Compatible avec le protocole DALI DT6. Adresse DALI sélectionnable par dip-switch ou par DALI. Quatre canaux de sortie. Fonctions de gradation Warm Tune, blanc dynamique, RGB, RGBW.

Suitable for powering 12/24 V constant voltage products. Compatible with DALI DT6 protocol. DALI address selectable via dip-switch or via DALI. Four output channels. Warm tune, dynamic white, RGB, RGBW dimming functions.


Signal Converter DMX/DALI

Dualgate | Converter SIGNAL




Dimmer CC DMX

Real-T_PRO | CC DMX/RDMX 4ch




Lumiquad PRO | DMX/RDM 4ch

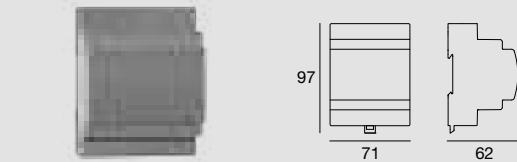

	Type	Signal Input	Signal Output	Power input	Connector
C-E700022		DALI	DMX	12-48V DC	CLAMP
C-E700023		DMX	DALI	12-48V DC	CLAMP

Convertisseur de signaux DALI vers DMX ou DMX vers DALI.
Signal converter from DALI to DMX or from DMX to DALI.



	Range	Output	Input	Eff.
C-E500015	4ch. x (1-5 W powerLEDs/ch.)	220mA 4-22V	24V DC	84%
	4ch. x (1.5-10 W powerLEDs/ch.)	220mA 7-45V	48V DC	85%
C-E500014	4ch. x (1.5-7.5 W powerLEDs/ch.)	350mA 4-22V	24V DC	86%
	4ch. x (2.5-16 W powerLEDs/ch.)	350mA 7-45V	48V DC	88%
C-E500013	4ch. x (3-18 W arrayLED/ch.)	400mA 7-45V	48V DC	89%
C-E500012	4ch. x (2-11 W powerLEDs/ch.)	500mA 4-22V	24V DC	89%
	4ch. x (3.5-22.5 W powerLEDs/ch.)	500mA 7-45V	48V DC	91%
C-E500011	4ch. x (2.5-14 W powerLEDs/ch.)	630mA 4-22V	24V DC	90%
	4ch. x (4.5-28.5 W powerLEDs/ch.)	630mA 7-45V	48V DC	92%
C-E500003	4ch. x (5-31.5 W arrayLED/ch.)	700mA 7-45V	48V DC	93%

24V DC switching		48V DC switching	
99371	Peta 50 W	99784	Mean 150 W
84700	Peta 75 W	99785	Mean 240 W
99374	Reson 75 W		
99331	Reson 150 W		

Convient à l'alimentation de produits à courant constant. Régulation via l'interface DMX. Quatre canaux de sortie. L'adresse DMX peut être réglée via NFC et l'application dédiée ou via DMX/RDM. Avec la fonction d'adressage automatique du maître I-LèD 83192.

Suitable for powering constant current products. Adjustment via DMX interface. Four output channels. DMS address settable via NFC and dedicated APP or via DMX/RDM. With I-LèD 83192 master, self-addressing function.



	Range	Output	Input
83187	4ch x 3/6/12W	250mA	12/24/48V DC
	4ch x 4/8/16W	350mA	12/24/48V DC
	4ch x 6/12/24W	500mA	12/24/48V DC
	4ch x 8/16/33W	700mA	12/24/48V DC

12V DC switching		24V DC switching	
83010	Mean 60 W	99371	Peta 50 W
83013	Mean 120 W	84700	Peta 75 W
		99374	Reson 75 W
		99331	Reson 150 W

48V DC switching			
99784	Mean 150 W		
99785	Mean 240 W		

Régulation via interface DMX, PUSH, interface 0/1-10V et potentiomètre. Quatre canaux de sortie. Fonctions de gradation accord chaud, blanc dynamique, RVB, RGBW. Adresse courant et dmx réglables via le commutateur rotatif ou via DMX/RDM.

Regulation via DMX interface, PUSH, 0/1-10V interface and potentiometer. Four output channels. Dimming functions warm tune, dynamic white, RGB, RGBW. Current and dmx address settable via rotay switch or via DMX/RDM.

Dimmer CV DMX

Spectrum_PRO | CV DMX/RDM 4ch




84865
Cable

Lumiquad | Mono CV DMX/RDM 1ch




84865
Cable

Lumiquad PRO CV | DMX/RDM 4ch

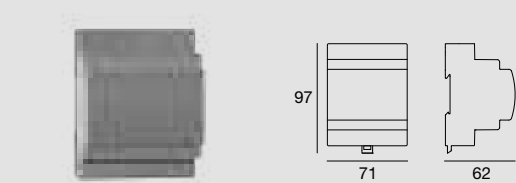


84865
Cable

Lumiquad mini | CV DMX/RDM 4ch

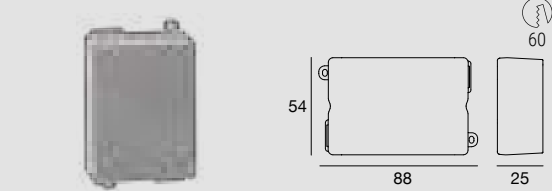

84865
Cable



	Range	Output	Input	Eff.
C-E500002	4ch. x (1-72 W stripLED/ch.)	3A 24V/ch	24V DC	95%
	4ch. x (1-72 W topLED/ch.)			
	24V DC switching			
99371	Peta 50 W			
84700	Peta 75 W			
99374	Reson 75 W			
99331	Reson 150 W			

Convient à l'alimentation de produits à tension constante. Régulation via l'interface DMX. Quatre canaux de sortie. L'adresse Dmx peut être réglée via NFC et l'application dédiée ou via DMX/RDM. Avec la fonction d'adressage automatique du maître I-LèD 83192.

Suitable for powering constant voltage products. Adjustment via DMX interface. Four output channels. DMS address settable via NFC and dedicated APP or via DMX/RDM. With I-LèD 83192 master, self-addressing function.



	Range	Output	Input	Eff.
83177	1-78 W DC	6.5A 12V	12V DC	95%
	1-156 W DC	6.5A 24V	24V DC	95%
	1-312 W DC	6.5A 48V	48V DC	95%
24V DC switching			48V DC switching	
99371	Peta 50 W		99784	Mean 150 W
84700	Peta 75 W		99785	Mean 240 W
99374	Reson 75 W			
99331	Reson 150 W			

Convient pour alimenter des produits à tension constante 12/24/48V. Régulation via interface DMX, PUSH, interface 0/1-10V ou potentiomètre. Canal de sortie unique.

Suitable for powering 12/24/48V constant voltage products. Regulation via DMX interface, PUSH, 0/1-10V interface or potentiometer. Single output channel.



	Range	Output	Input	Eff.
83178	4ch (1-60W DC/ch)	5A 12V/ch	12V DC	95%
	4ch (1-120W DC/ch)	5A 24V/ch	24V DC	95%
	4ch (1-240W DC/ch)	5A 48V/ch	48V DC	95%
24V DC switching			48V DC switching	
99371	Peta 50 W		99784	Mean 150 W
84700	Peta 75 W		99785	Mean 240 W
99374	Reson 75 W			
99331	Reson 150 W			

Convient pour alimenter des produits à tension constante 12/24/48V. Régulation via interface DMX, PUSH, interface 0/1-10V. Quatre canaux de sortie. Fonctions de réglage chaud, blanc dynamique, RVB, RGBW.

Suitable for powering 12/24/48V constant voltage products. Regulation via DMX interface, PUSH, 0/1-10V interface. Four output channels. Warm tune, dynamic white, RGB, RGBW dimming functions.




	Range	Output	Input
C-E700005	4ch. x (1-30 W DC/ch.)	2.5A 12V/ch	12V DC
	4ch. x (1-60 W DC/ch)	2.5A 24V/ch	24V DC
24V DC switching			
99371	Peta 50 W		
84700	Peta 75 W		
99374	Reson 75 W		
99331	Reson 150 W		


Convient à l'alimentation de bandes de LED de 5 mm et de LED, également RGB. Adresse DMX sélectionnable par dip-switch ou par RDM. Compatible avec le protocole USITT DMX 512-A. Quatre canaux de sortie. Fonctions de gradation Warm Tune, blanc dynamique, RGB, RGBW.

Suitable for powering strip LEDs and 5 mm LEDs, also RGB. DMX address selectable via dip-switch or via DALI. Compatible with USITT DMX 512-A protocol. Four output channels. Warm tune, dynamic white, RGB, RGBW dimming functions.

Master DMX

Stick_GU2 | DMX Controller






86 10 86


99184
Power supply

84865
DMX cable

98140
Outer casing

Stick_DE3 | DMX Controller





146 106 11


99184
Power supply

84865
DMX cable

98140
Outer casing

Slesa_U11 | DMX Controller





75 90 160 45

83244
Power supply


89186
5 m extension
M 5 pin M12
M 3 pin XLR

84869
Connector
M 3 pin XLR

84865
DMX cable

Dina_DR1 | DMX Controller





60 159 90

83145
Included

Finishes ☐ Text white R9003 ☐ Text black R9005



	Type	Signal Output	Input	Connector
99045	☐	DMX	5.5-6V DC	CLAMP micro USB
99046	☒	DMX	5.5-6V DC	CLAMP micro USB

Sélecteur de mode : Couleur, Scénario et Gradateur. Jusqu'à 128 canaux (0,25 univers DMX) peuvent être gérés. Sélecteur pour jusqu'à 24 scènes avec sélection entre dynamique ou statique. Les flèches permettent de passer d'une scène active à une autre. Pendant l'exécution d'un programme, la fonction gradation permet de faire varier l'intensité. En mode couleur, il est possible de rappeler une série de couleurs statiques prédéfinies. Toutes les fonctions peuvent être configurées depuis le gestionnaire matériel (activation/désactivation des différents modes, sélection du scénario de départ, etc.).

Mode selector: Color, Scene and Dimmer. Ability to handle 128ch (0.25 DMX Universe). Selector of up to 24 scenes with selection between dynamic or static. Arrows allow changing active scene. During the execution of a program, the dimmer function can be used to vary the intensity. In colour mode, it is possible to recall a series of pre-set static colours. All functions can be configured by hardware manager (enable/disable the different modes, select starting scenario, etc.).



	Type	Signal Output	Input	Connector
99234	☐	DMX	5.5-6V DC	CLAMP RJ45 mini USB
99235	☒	DMX	5.5-6V DC	CLAMP RJ45 mini USB

Capable de gérer 512 canaux (1 univers DMX), extensible jusqu'à 1024 canaux (2 univers DMX). Sélecteur de zone pour activer jusqu'à 10 scénarios simultanément. Gradateur pour le réglage de l'intensité lumineuse et de la saturation. Sélecteur permettant de choisir jusqu'à 500 scénarios et entre scénario dynamique et statique. Possibilité de faire varier la vitesse des scénarios dynamiques et des effets de couleur. Pavé de sélection des couleurs permettant de saisir des valeurs RVB. Possibilité de contrôle via le réseau WiFi local (après connexion Ethernet) avec l'application gratuite Arcolis Remote App.

Ability to handle 512ch (1 DMX Universe), extendable up to 1024ch (2 DMX Universes). Zone selector to simultaneously activate up to 10 scenes. Dimmer to adjust light intensity and saturation. Selector of up to 500 scenes with the possibility of choosing between dynamic or static. Possibility of increasing or reducing the speed of dynamic scenes and colour effects. Color selector pad allowing RGB values to be entered. Control option via local WiFi network (after Ethernet connection) with free Arcolis Remote App.



	Signal Output	Input	Connector
83243	DMX	5.5-6V DC	RJ45 XLR 3 Pin F. USB C

Capable de gérer 1024 canaux (2 univers DMX) de manière autonome, extensible jusqu'à 2048 canaux (4 univers DMX) avec un PC connecté. Sélecteur de scènes (jusqu'à 99) avec choix entre dynamique et statique. Les flèches permettent de passer d'une scène active à une autre. Sélecteur de 5 zones. Possibilité de contrôle via le réseau WiFi local (après connexion Ethernet) avec l'application gratuite Arcolis Remote App.

Ability to manage 1024ch (2 DMX universes) stand-alone, extendable up to 2048ch (4 DMX universes) with connected PC. Selector of up to 99 scenes with selection between dynamic or static. Arrows allow changing active scene. 5 zone selector. Control option via local WiFi network (after Ethernet connection) with free Arcolis Remote App.




	Signal Output	Input	Connector
83144	6 uni DMX/RDM	12V DC	CLAMP Ethernet RJ45 USB typeC

3072ch (6 univers DMX) autonome, 128 pilotes DALI (2 BUS DALI, alimentation BUS DALI requise). Sélecteur pour 2000 scènes au choix, dynamiques ou statiques. Des flèches permettent de passer d'une scène active à une autre. Sélecteur de 20 zones. Option de contrôle via le réseau WiFi local (après connexion Ethernet) avec l'application gratuite Arcolis Remote App. Permet la mise en œuvre via le Cloud pour la gestion à distance (accès Internet requis).

Ability to manage 3072ch (6 DMX Universes) standalone, 128 DALI drivers (2 DALI BUS, DALI BUS power supply required). Selector of up to 2000 scenes with choice of dynamic or static. Arrows allow changing active scene. 20 zone selector. Control option via local WiFi network (after Ethernet connection) with free Arcolis Remote App. Allows deployment via Cloud for remote management (Internet access required).

Dmxhub | 6OUT DMX/RDM





99658
Power supply



84865
DMX cable



89189
5 m cable
M 5 pin M12



98985
ALLinONE splitter
signal/power





	Signal Output	Signal Input	Connector	Input
99386	6 DMX512/RDM	DMX512/RDM	CLAMP	9-24V DC

Le répartiteur DMX-512 reçoit le signal DMX en entrée et le renvoie aux 6 ports de sortie DMX. Le répartiteur peut également servir d'amplificateur de signal dans la mesure où chaque port prend en charge une autre connexion de 300 m de long. Ce répartiteur est conforme au protocole RDM pour la communication bidirectionnelle sur DMX. Appareil adapté au montage sur rail DIN Omega 35 mm.

The DMX-512 Splitter takes the DMX input signal and sends it back to the 6 DMX output ports. The splitter can also function as a signal amplifier, because each port supports another 300-metre long connection. This splitter complies with the RDM protocol for bi-directional communication on DMX. Fixture suitable for mounting on 35mm Omega DIN rail.

Dmxhub PRO | 6OUT DMX/RDM





99658
Power supply



84865
DMX cable



89189
5 m cable
M 5 pin M12



98985
ALLinONE splitter
signal/power




	Signal Output	Signal Input	Connector	Input
83148	6 DMX 512/RDM	DMX 512/RDM	CLAMP	10-48 VDC

Le répartiteur DMX-512 reçoit le signal DMX en entrée et le renvoie aux 6 ports de sortie DMX. Le répartiteur peut également servir d'amplificateur de signal dans la mesure où chaque port prend en charge une autre connexion de 300 m de long. Ce répartiteur est conforme au protocole RDM pour la communication bidirectionnelle sur DMX. Appareil adapté au montage sur rail DIN Omega 35 mm.

The DMX-512 Splitter takes the DMX input signal and sends it back to the 6 DMX output ports. The splitter can also function as a signal amplifier, because each port supports another 300-metre long connection. This splitter complies with the RDM protocol for bi-directional communication on DMX. Fixture suitable for mounting on 35mm Omega DIN rail.

Emergency

Emergency light kit | Emergency

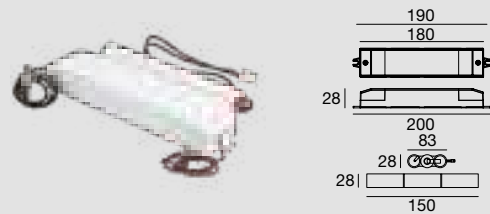

Commutable (on/off) en présence de tension de secteur via interrupteur sur l'entrée SL (ligne commutée). Réinitialisation automatique après remplacement de la batterie et/ou de la lampe LED. Système électronique de charge multi-niveau. Fourni avec batterie 3000 mAh.


Switchable (on/off) in the presence of mains via switch on SL input (switched line). Automatic reset following battery and/or LED lamp replacement. Electronic multi-level charging system. Supplied with 3,000 mAh battery pack.




	Range	Output	Input	Eff.	PF	Surge
99355	Universal	6-60V 40-400mA	220-240V AC	86%	0.5	4 kV
Frequency		50-60 Hz				
Nominal input current		40 mA (30 A inrush current with cold start)				
Outout voltage (without load)		6-60V				
TA Operating temperature		-25 +50 °C				
Max casing temperature TC		70 °C				
Control interface		Switch Line, Rest mode				
Protections		Overtemperature, overload, overvoltage, short-circuit, open circus				
Charge current		200 mA				
Emergency output current		400-40 mA				
Emergency power		2,4W				
Emergency output current		20 h				

Reference norms

IEC 61347-2-7:2011, IEC 61347-2-7:2011/AMD1:2017, IEC 61347-1:2015, IEC 61347-1:2015/AMD1:2017, EN 61347-1:2015, EN 61347-2-7:2012+A1:2019, EN 55015:2013/A1:2015, EN61547:2009, EN 61000-3-2: 2014
EN 61000-3-3: 2013

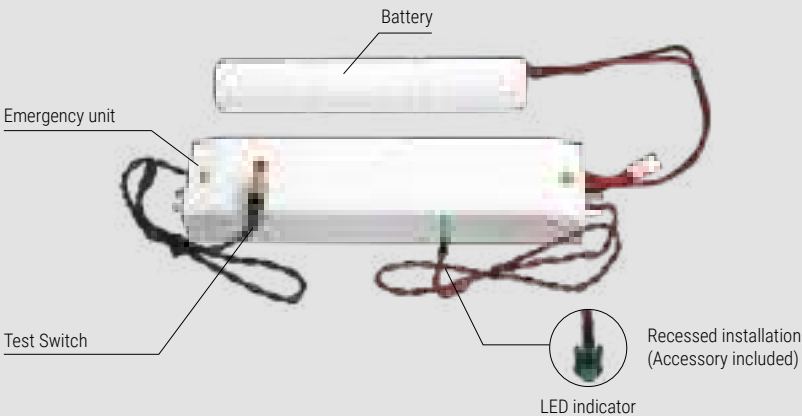


Unswitch Switch

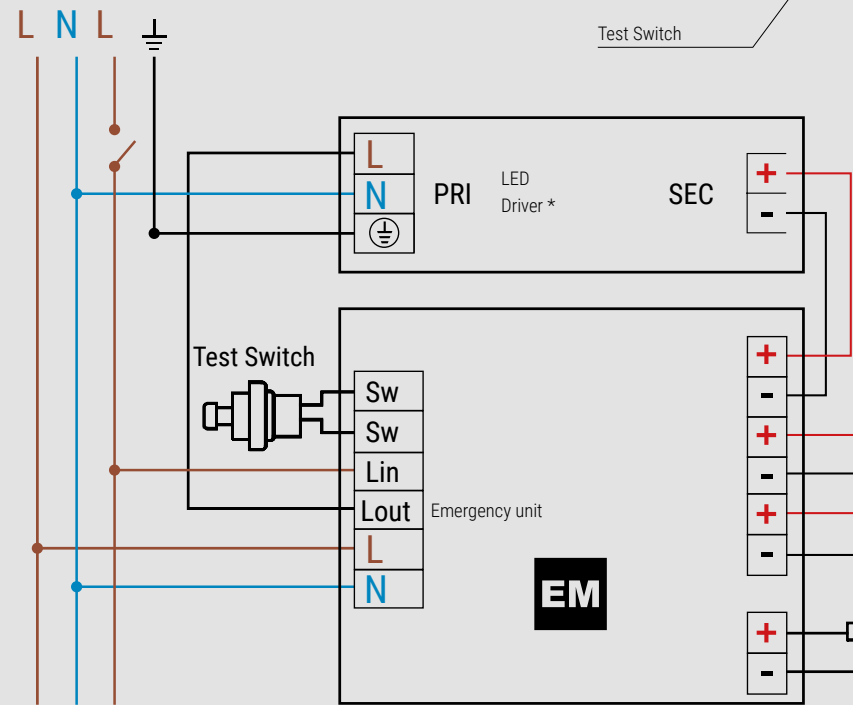

L'installation du kit d'urgence est simple et rapide: connectez l'unité de secours au driver à LED, comme indiqué sur le schéma.
* driver non inclus dans le kit d'urgence / kit d'urgence pouvant être connecté à tous les driver d'origine du luminaire à LED.

The installation of the emergency kit is quick and simple: the Emergency unit only needs to be connected to the LED driver as shown in the diagram.
* the driver is not included in the Emergency kit/the Emergency kit can be connected to all the original drivers of the LED device.



Emergency light kit | Emergency



- Fonctionne uniquement en cas d'urgence
- Fonctionne en éclairage continu avec des alimentations électroniques, et électroniques avec gradateur.
- Version réglable avec commutateur DIP, pour alimentation à LED à courant constant ou pour modules LED à tension constante.
- Raccordables à des alimentations avec tension et courant maximaux en sortie de 90 V et 2 A
- Relais instantané en cas de coupure de réseau
- Batterie au NiCd haute température
- Indicateur de charge à LED avec câble FROR
- Dispositif de protection contre les décharges prolongées.
- Possibilités d'autodiagnostic avec le module externe MAT4 DALI.
- Dispositif de recharge avec isolation principale en mesure de recharger la batterie en mode normal, après l'épreuve mentionnée au point 22.3 de la norme CEI EN 61347-2-7:2007
- Fourni avec batterie 3000 mAh.


- Maintained or non maintained operation
- Suitable for electronic driver, dimmable electronic driver
- Adjustable version dip-switch, constant current or constant voltage to power LED to LED modules
- Connected to power supplies with maximum output voltage and current 90V and 2A
- Automatic operation
- High temperature NiCd batteries
- Charge indicator with FROR led cable
- Protection device against extensive discharge
- MAT4 DALI self diagnosis system with external module
- Charging device with supply is reinforced insulation able to recharge the battery normally after the test in clause 22.3 of the IEC 61347-2-7:2007.
- Supplied with 3,000 mAh battery pack.



	Range	Output	Input	PF
KIT0014	Universal C.C.	9-57V 350-60mA	220-240V AC	0.5
	Universal C.V.	24V 2000mA		
Frequency		50-60 Hz		
Nominal input current		20 mA		
Outout voltage (without load)		9-57V C.C. / 24V C.V.		
TA Operating temperature		0 +50 °C		
Max casing temperature TC		70 °C		
Control interface		Switch Line, Rest mode		
Protections		Overtemperature, overload, overvoltage, short-circuit, open circus		
Emergency output current		350-60 mA C.C. / 2000mA C.V.		
Emergency power		3,4W		
Recharging time		24 h		
Reference norms		EN61347-2-13, EN61347-2-7, EN61547, EN55015, EN60598-2-22, EN61000-3-2		

L'installation du kit d'urgence est simple et rapide: connectez l'unité de secours au driver à LED, comme indiqué sur le schéma.
* driver non inclus dans le kit d'urgence / kit d'urgence pouvant être connecté à tous les driver d'origine du luminaire à LED.

The installation of the emergency kit is quick and simple: the Emergency unit only needs to be connected to the LED driver as shown in the diagram.
* the driver is not included in the Emergency kit/the Emergency kit can be connected to all the original drivers of the LED device.

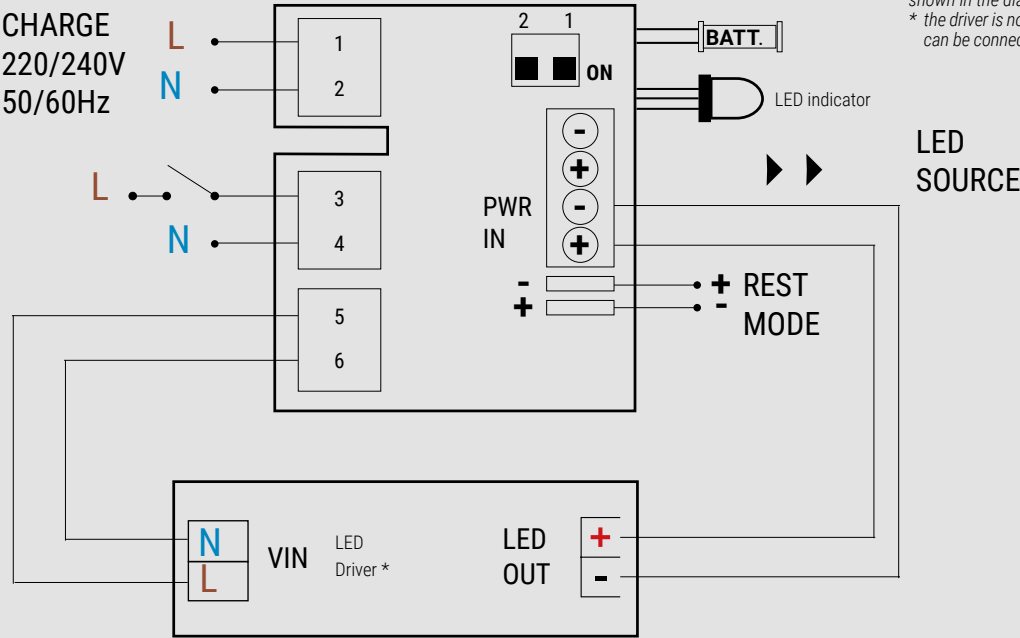

Cables

	application	type	voltage	insulation	Ø	nomenclature	sec. mm	cable colour	core colour	cable gland	temperature
84874	indoor	RGB	low	PVC + PVC	7 mm	--	6 x 0,75	●	○●●●●●	PG7	--
99237	outdoor	MONO	low	FEP + PCP	5,3 mm	--	2 x 0,5	●	●●	--	70-90°C
84888	outdoor	MONO	low	GUM	6,5 mm	--	2 x 1	●	●●	PG7	--
84875	outdoor	MONO	low	GUM + PCP	8,3 mm	H07RN8-F	2 x 1	●	●●	PG9	60-90°C
84892	indoor outdoor	MONO	low	FEP + FEP	1,9 x 3,3 mm	--	2 x 0,5	●●	●●	--	180°C
99353	outdoor	--	high	GUM + PCP	6,2 mm	H05RN-F	2 x 0,75	●	●●	PG7	60-90°C
99229	outdoor	--	high	GUM + PCP	6,5 mm	H05RN-F	2 x 1	●	●●	PG7	60-90°C
84887	outdoor	--	high	GUM + PCP	7,2 mm	H05RN-F	3 x 1	●	●●●	PG7	60-90°C
99002	outdoor underwater	MONO	low	NEOPRENE	5,3 mm	--	2 x 0,5	●	●●	--	70-90°C
84876	outdoor underwater	MONO	low	NEOPRENE	6,5 mm	--	3 x 1	●	●●●	PG9	--
84864	outdoor underwater	RGB	low	NEOPRENE	9,6 mm	--	7 x 1	●	○●●●●●●●	PG9	--

Extension cables

Les câbles conducteurs à utiliser pour installer nos produits à l'extérieur doivent être du type Néoprène H07 qui répond aux exigences de la norme EN60598 sect. 5.2.2 :

- température d'utilisation 90°C
- type de conducteur cuivre rouge
- tension de fonctionnement 450/750V
- nomenclature H07RN-F
- conforme à la norme CEI 20-19
- conforme aux exigences requises par les directives B.T.73/23CEE et 93/68CEE


Le câble est adapté pour utilisation en milieux tant humides que secs et en plein air ; il est résistant à l'eau, aux abrasions et aux fléchissements fréquents. Le câble résiste à des températures jusqu'à -25°C sans présenter de fissures superficielles ; il faut néanmoins le protéger s'il se trouve sur une surface exposée au passage de véhicules ou de personnes et éviter des courbures de plus de 30°.

	application	voltage	insulation	sec. mm	length mm	colour	temperature
84866	indoor	low	PVC	3 x 0,5	1500	●●●	90°C
84867	indoor	low	PVC	3 x 0,5	3000	●●●	90°C
84872	indoor	low	PVC	3 x 0,5	1500	●●●	90°C
84873	indoor	low	PVC	3 x 0,5	1500	●○●	90°C

The conductor cables to utilize for installing our outdoor fixtures has to be NEOPRENE H07 that respond to technical requests of EN60598 sez. 5.2.2:

- temperature of use 90°C
- type of conductor red copper wire
- execution tension 450/750V
- nomenclature H07RN-F
- conforming of the normative CEI 20-19
- conforming on the requests of directive B.T.73/23CEE e 93/68CEE

The cable is suitable for humid and dry outdoor ambient; Water resist, on erosion, on frequent flexions. The cable resist on temperature up to -25°C without any superficial crackles; is necessary to protect it anyway even on surface that is use for pathways or drive over in order to prevent curving at 30°.

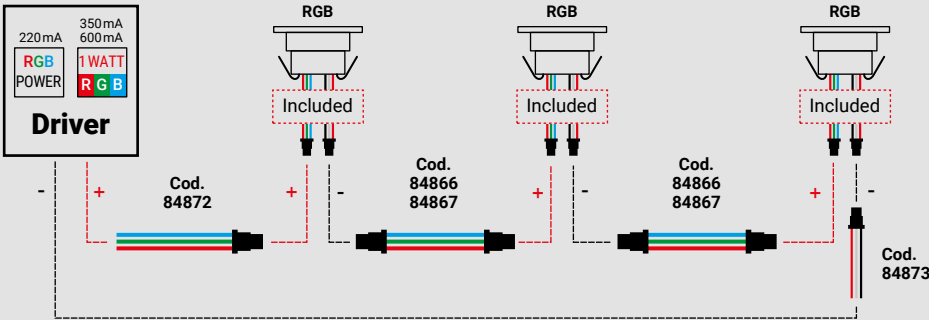


Dmx accessories | Junction boxes

Cable | DMX




price / m	sec. Ø
84865 order: x m / 84865	2 x 0,25 mm² + shield

Junction box | connector gel 2 ways



Connectors	External Ø of the cabl
98989 IP68 2x0,75 mm²	Ø 4,8 ~ Ø 6 mm

Junction box | connector 2 ways




Connectors	External Ø of the cable
98990 IP68 min. 2x0,25 mm² max. 2x1,0 mm²	Ø 3 ~ Ø 8 mm

Junction box | connector gel 2 ways




Connectors	External Ø of the cabl
98991 IP68 max. 3x1.5 mm²	Ø 5,5 ~ Ø 10 mm

Junction box | connector 2 ways



Connectors	External Ø of the cable
84893 IP68 min. 2x0,5 mm² max. 2x2.5 mm²	Ø 7 ~ Ø 13,5 mm

Junction box | connector gel 4 ways



Connectors	External Ø of the cable
84894 IP68 max. 4x1,5 mm²	Ø 6,5 ~ Ø 12 mm

Cables | DMX



L m	Connectors	Sec. Ø
84895 84994	1 5	F 3 pin XLR
		2 x 0,25 mm² + shield

Extension cables | DMX




L m	Connectors	Sec. Ø
84871 84885	1 5	M + F 3 pin XLR
		2 x 0,25 mm² + shield

Connectors | DMX



L m	Connectors	Sec. Ø
84869 84870 99346 99379	3 M 3 F 5 M 5 F	XLR

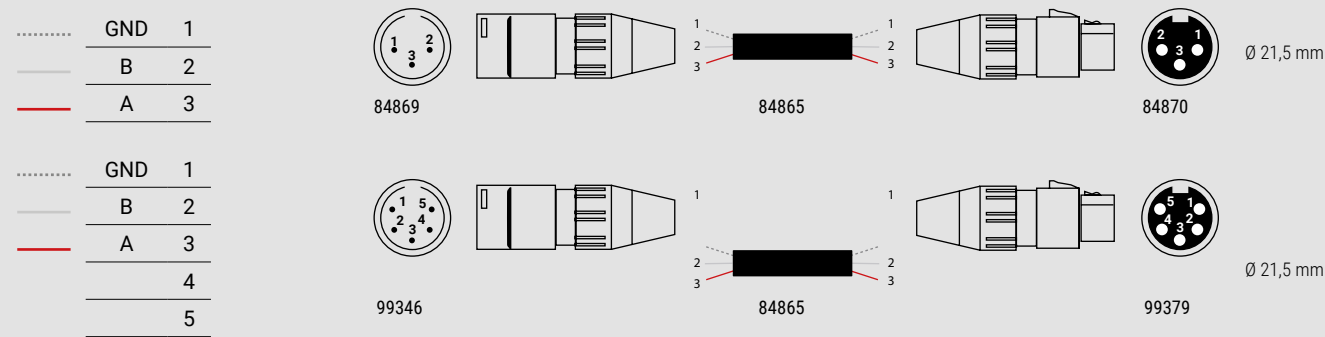

INDEX FINISHES SYMBOLS READ THE CATALOG

Code	Page
1140	417
1141	417
1143	417
1144	417
1146	417
1147	417
7220	371
7221	371
7226	371
7227	371
7232	371
7233	371
7234	371
7235	371
7486	373
7487	373
7618	101
7618M	101
7619	81
7619M	81
7805	541
7805N	541
7806	541
7806E	541
7806N	541
7806NE	541
7806NS	541
7806S	541
7807	543
7807N	543
7808	543
7808E	543
7808N	543
7808NE	543
7808NS	543
7808S	543
7809	547
7809N	547
7810	547
7810E	547
7810N	547
7810NE	547
7810NS	547
7810S	547
7904	343
7905	343
7906	343
7907	343
7908	383
7908M	383
7909	383
7909M	383
7910	383
7910M	383
7911	383
7911M	383
7956	365
7957	365
7972	367
7973	367
7974	367
8028	545
8028N	545
8029	545
8029N	545
8200	243
8201	243
8202	247
8203	247
8204	243
8205	243
8206	247
8207	247
8208	399
8209	399
8210	399
8211	399
8227	321
8227N	321
8229	321
8229N	321
8231	321
8231N	321
8233	321

Code	Page
8233N	321
8236	319
8236N	319
8238	319
8238N	319
8240	319
8240N	319
8242	319
8242N	319
8255	390
8255M	390
8255N	390
8256	391
8256M	391
8256N	391
8257	391
8257M	391
8257N	391
8258	391
8258M	391
8258N	391
8259	97
8259N	97
8260	97
8260N	97
8261	390
8261M	390
8261N	390
8262	391
8262M	391
8262N	391
8263	391
8263M	391
8263N	391
8264	391
8264M	391
8264N	391
8265	399
8266	399
8270	271
	339
8271	271
	339
8272	271
	339
8275	271
	339
8276	271
	339
8277	271
	339
8280	271
	339
8281	271
	339
8282	271
	339
8285	272
	341
8286	272
	341
8287	272
	341
8288	272
	341
8289	272
	341
8292	273
	341
8293	273
	341
8294	273
	341
8295	273
	341
8296	273
	341
8299	273
	341
8300	273
	341
8301	273
	341
8302	273

Code	Page
8303	273
	341
8321	539
8322	539
8325	325
8326	325
8328	325
8329	325
8331	325
8332	325
8334	323
8335	323
8337	323
8338	323
8340	323
8341	323
8345	455
8346	455
8348	455
8349	455
8350	265
8351	265
8353	265
8354	265
8355	265
8356	265
8358	265
8359	265
8360	265
8361	265
8363	265
8364	265
8365	457
8366	457
8420	237
8420M	237
8460	145
8461	145
8462	145
8466	143
8467	143
8470	83
8470M	83
8472	103
8472M	103
8500	413
8501	413
8503	413
8504	413
8505	243
8506	243
8507	247
8508	247
8550	325
8551	325
8553	325
8554	325
8556	325
8557	325
8590	323
8591	323
8593	323
8594	323
8596	323
8597	323
8660	609
8660M	609
8663	609
8663M	609
8666	609
8666M	609
8669	609
8669M	609
8672	551
8672M	551
8770	388
8770M	388
8770N	388
8771	388
8771M	388
8771N	388
8772	389
8772M	389

Code	Page
8772N	389
8773	389
8773M	389
8773N	389
8774	389
8774M	389
8774N	389
8775	389
8775M	389
8775N	389
8776	389
8776M	389
8776N	389
8777	389
8777M	389
8777N	389
8840	251
8840N	251
8841	251
8841N	251
8842	251
8842N	251
8843	251
8843N	251
8844	251
8844N	251
8845	249
8845N	249
8846	249
8846N	249
8850	347
8850N	347
8851	347
8851N	347
8861	73
8861M	73
8865	75
8865M	75
8866	73
8866M	73
8867	73
8867M	73
8870	75
8870M	75
8875	73
8876	75
8877	75
8880	401
8881	401
8882	401
8883	401
8885	401
8886	401
8887	401
8888	401
8912	388
8912M	388
8913	388
8913M	388
8914	389
8914M	389
8915	389
8915M	389
8916	389
8916M	389
8917	389
8917M	389
8918	389
8918M	389
8919	389
8919M	389
8920	349
8921	349
8922	349
8923	349
8924	349
8925	349
8926	349
8927	349
8928	281
8929	281
8930	281
8931	281
8932	281

Code	Page
8933	281
8934	281
8935	281
8936	285
8937	285
8938	285
8939	285
8940	611
8940M	611
8941	611
8941M	611
8942	611
8942M	611
8943	611
8943M	611
8944	611
8944M	611
8945	611
8945M	611
8946	611
8946M	611
8947	611
8947M	611
8948	611
8948M	611
8949	611
8949M	611
9015	327
9016	327
9018	327
9019	327
9021	327
9022	327
9024	329
9025	329
9027	329
9028	329
9095	633
9124	287
9124M	287
9125	287
9125M	287
9126	287
9126M	287
9127	287
9127M	287
9128	287
9128M	287
9129	287
9129M	287
9135	345
9136	345
9137	345
9138	345
9139	345
9140	345
9141	345
9142	345
9143	345
9144	345
9145	345
9146	345
9160	335
9161	335
9162	233
9163	233
9164	233
9165	233
9170	549
9171	549
9172	549
9174	393
9174M	393
9175	393
9175M	393
9176	393
9176M	393
9177	393
9177M	393
9178	393
9178M	393
9179	393
9179M	393
9180	393

Code	Page
9180M	393
9181	393
9181M	393
9182	393
9182M	393
9183	393
9183M	393
9184	393
9184M	393
9185	393
9185M	393
9189	99
9189M	99
9190	99
9190M	99
9191	99
9191M	99
9192	99
9192M	99
9195	239
9195M	239
9196	239
9196M	239
9197	239
9197M	239
9198	239
9198M	239
9315	463
9316	463
9320	635
9321	635
9322	515
9323	515
9324	487
9325	487
9330	517
9331	517
9334	489
9335	489
9336	489
9337	489
9338	561
9339	561
9340	561
9341	561
9345	471
9346	471
9347	471
9349	471
9350	471
9351	471
9355	235
9357	235
9358	235
9361	235
9363	235
9364	235
9367	235
9369	235
9370	235
9373	93
9375	93
9376	93
9379	93
9381	93
9382	93
9385	93
9387	93
9388	93
9391	363
9393	363
9394	363
9397	363
9399	363
9400	363
9451	85
9453	85
9454	85
9532	390
9532M	390
9533	390
9533M	390
9534	391
9534M	391

Code	Page	Code	Page	Code	Page	Code	Page	Code	Page
9535	391	9668M	113	9817	453	16001	637	63830M00	75
9535M	391	9669	403	9908	141	16105	491	63830W00	75
9536	391	9669M	403	9908M	141	16106	519	64010	231
9536M	391	9670	403	9909	141	16109	491	64011	231
9537	391	9670M	403	9909M	141	16110	519	64020	231
9537M	391	9671	403	9910	141	16112	491	64021	231
9538	391	9671M	403	9910M	141	16113	519	64030	231
9538M	391	9672	403	9911	141	16115	519	64031	231
9539	391	9672M	403	9911M	141	16130	623	64060	231
9539M	391	9673	403	9912	141	16131	623	64061	231
9540	388	9673M	403	9912M	141	16132	623	64066	231
9540M	388	9674	403	9913	141	16133	623	64067	231
9540N	388	9674M	403	9913M	141	16150	621	64180	431
9541	389	9675	405	9930	115	16160	621	64546W30	63
9541M	389	9675M	405	9930M	115	16162	621	64547W30	63
9541N	389	9676	405	9933	407	16164	621	64548W30	63
9542	389	9676M	405	9933M	407	16168	521	64549W30	63
9542M	389	9677	405	9936	407	16169	521	64575	231
9542N	389	9677M	405	9936M	407	16170	521	64578	231
9543	389	9678	475	9939	407	16180	521	64660	175
9543M	389	9678M	475	9939M	407	16181	491	64670	231
9543N	389	9679	475	10013	637	16183	491	64789W07	613
9545	390	9679M	475	10015	637	16185	491	64790W07	613
9545M	390	9727	139	10114	275	16190	619	64792W07	613
9545N	390	9727M	139	12100	459	16191	619	64793W07	613
9546	391	9728	139	12101	277	16192	619	64795W07	613
9546M	391	9728M	139	12102	459	16193	619	64796W07	613
9546N	391	9730	139	12103	277	16213	523	65004	221
9547	391	9730M	139	12104	459	16214	493	65008	223
9547M	391	9731	139	12105	277	16215	625	65010	221
9547N	391	9731M	139	12106	459	16216	523	65011	223
9548	391	9746	253	12107	277	16217	493	65013	221
9548M	391	9747	253	12122	109	16218	625	65014	223
9548N	391	9748	253	12124	109	50370	495	65016	223
9595	473	9749	253	12126	109		509	65019	223
9596	473	9750	253	12131	109	51365	495	65022	223
9597	473	9751	253	12132	109	51366	495	65023	557
9598	473	9752	253	12133	109	51395	509	65025	223
9599	473	9753	253	12135	275	51396	509	65026	485
9600	473	9755	253	12136	275	51585	509	65028	221
9630	369	9756	253	12137	275	51586	509	65035	485
9630M	369	9757	253	12138	275	52700	593	65036	485
9631	369	9758	253	12213	279	52901	593	65037	485
9631M	369	9786	153	12214	111	52951	593	65038	557
9633	147	9786M	153	12215	461	60680M70	431	65039	557
9633M	147	9787	153	12216	279	60680W70	431	65040	557
9634	147	9787M	153	12217	111	60811M00	427	65054	221
9634M	147	9788	153	12218	461	60811W00	427		223
9637	269	9788M	153	12224	277	60813M00	429	65055	221
9637M	269	9789	153	12225	277	60813W00	429		223
9638	269	9789M	153	14080	619	60814M00	429	65082	613
9638M	269	9790	153		621	60814W00	429	65097	223
9639	269	9790M	153		623	60815M00	429	65142	231
9639M	269	9791	153	14081	619	60815W00	429	65181	221
9640	269	9791M	153		621	60817M00	387	65182	221
9640M	269	9792	153		623	60817W00	387	65183	221
9645	411	9792M	153	14082	619	60819M00	387	65184	221
9645M	411	9793	153		621	60819W00	387	76078M00	553
9646	411	9793M	153		623	60830	63	76078N00	553
9646M	411	9794	153	14930	619		73	76078W00	553
9647	411	9794M	153		621		75	76079M00	553
9647M	411	9795	153		623	60834M00	387	76079N00	553
9648	411	9795M	153		625	60834W00	387	76079W00	553
9648M	411	9796	153	14931	551	60837	429	76080W30	587
9650	469	9796M	153		605	60838	429	76081W00	587
9651	469	9797	153		607	60840	75	76084W50	91
9652	469	9797M	153		609	60860	73	76085W50	91
9658	415	9800	397		619	60910M00	427	76086W50	91
9658M	415	9801	397		621	60910W00	427	76087W50	91
9659	415	9802	397		623	60920M70	430	76090W07	569
9659M	415	9803	397		625	60920W70	430	76092W07	569
9662	563	9804	397	14937	629	60930M70	431	76093W07	569
9662M	563	9805	397		619	60930W70	431	76094W07	571
9663	563	9806	397		621	61270	431	76096W07	571
9663M	563	9807	397		623	61280	431	76097W07	571
9664	563	9808	397		637	61290	431	76098W07	571
9664M	563	9809	241	14958	637	61390M00	431	76100W07	571
9665	563	9810	241	14991	637	61390W00	431	76101W07	571
9665M	563	9811	241	14992	611	62757	485	76119W30	585
9666	113	9812	241		619		557	76180W30	481
9666M	113	9813	241		621	62758	485	76205W30	585
9667	113	9814	241		623		557	76372M00	195
9667M	113	9815	453	15111	519	62900	221	76372W00	195
9668	113	9816	453	16000	637		223	76373M00	195
								76373W00	195
								76374M00	195
								76374W00	195
								76375M00	195
								76375W00	195
								76376M00	195
								76376W00	195
								76377M00	195
								76377W00	195
								76378M50	195
								76378W50	195
								76379M50	195
								76379W50	195
								76380M50	195
								76380W50	195
								76381M50	195
								76381W50	195
								76382M50	195
								76382W50	195
								76383M50	195
								76383W50	195
								76384M61	195
								76384W61	195
								76385M61	195
								76385W61	195
								76386M61	195
								76386W61	195
								76387M61	195
								76387W61	195
								76420M15	197
								76420M35	197
								76420M60	197
								76420W15	197
								76420W35	197
								76420W60	197
								76421M15	197
								76421M35	197
								76421M60	197
								76421W15	197
								76421W35	197
								76421W60	197
								76422M15	197
								76422M35	197
								76422M60	197
								76422W15	197
								76422W35	197
								76422W60	197
								76423M15	197
								76423M35	197
								76423M60	197
								76423W15	197
								76423W35	197
								76423W60	197
								76428M15	199
								76428M35	199
								76428M60	199
								76428W15	199
								76428W35	199
								76428W60	199
								76429M15	199
								76429M35	199
								76429M60	199
								76429W15	199
								76429W35	199
								76429W60	199
								76430M15	199
								76430M35	199
								76430M60	199
								76430W15	199
								76430W35	199
								76430W60	199
								76431M15	199
								76431M35	199
								76431M60	199
								76431W15	199
								76431W35	

Code	Page
76655W30	559
76690W18	595
76694W18	595
76863W18	595
76867W18	595
76890W00	605
76892W00	605
76894W00	605
76896W00	605
77044W07	569
77046W07	569
77047W07	569
77099M00	629
77099W00	629
77100M00	629
77100W00	629
77101M00	629
77101W00	629
77102M00	629
77102W00	629
77103M00	629
77103W00	629
77104M00	629
77104W00	629
77186M00	553
77186N00	553
77186W00	553
77187W00	605
77322M30	36
77322M45	36
77322W30	36
77322W45	36
77326M30	36
77326M50	36
77326W30	36
77326W50	36
77330M30	34
77330M45	34
77330W30	34
77330W45	34
77331M30	34
77331M45	34
77331W30	34
77331W45	34
77334M30	34
77334M50	34
77334W30	34
77334W50	34
77335M30	34
77335M50	34
77335W30	34
77335W50	34
77338M30	38
77338M45	38
77338W30	38
77338W45	38
77339M30	38
77339M45	38
77339W30	38
77339W45	38
77342M30	38
77342M50	38
77342W30	38
77342W50	38
77343M30	38
77343M50	38
77343W30	38
77343W50	38
77383W07	567
77385W07	567
77386W07	567
77387W07	567
77389W07	567
77390W07	567
77391W70	573
77393W70	573
77413W00	559
77414W00	559
77423W00	559
77424W00	559
77453W00	599
77582M00	185
77582W00	185
77583M00	185

Code	Page
77583W00	185
77584M00	185
77584W00	185
77585M30	185
77585W30	185
77586M30	185
77586W30	185
77587M00	185
77587W00	185
77588M00	185
77588W00	185
77589M30	187
77589W30	187
77590M30	187
77590W30	187
77591M00	187
77591W00	187
77592M00	187
77592W00	187
77593M45	187
77593W45	187
77594M10	188
77594M30	188
77594M45	188
77594W10	188
77594W30	188
77594W45	188
77595M30	189
77595M45	189
77595W30	189
77595W45	189
77596M85	189
77596W85	189
77597M20	189
77597M35	189
77597M60	189
77597W20	189
77597W35	189
77597W60	189
77611W30	503
77611W60	503
80338W30	77
80338W60	77
80581W30	585
80582W30	587
80585W30	587
80588W30	587
80605W07	569
80990	165
80991	165
80992	165
80993	165
80994	165
80995	165
80999	165
81000	165
81002	165
81003	165
81005	166
81006	165
81007	165
81008	165
81009	165
81012	165
81013	165
81014	165
81015	165
81018	167
81019	167
81021	166
81022	166
81024	167
81025	167
81026	167
81033	165
81034	165
81036	165
81037	165
81039	165
81040	165
81042	165
81043	165
81045	165
81046	165

Code	Page
81048	165
81049	165
81051	165
81052	165
81054	165
81055	165
81057	165
81058	165
81060	165
81061	165
81063	165
81064	165
81066	165
81067	165
81069	166
81070	166
81072	167
81073	167
81075	167
81076	167
81078	167
81079	167
81081	166
81082	166
81084	166
81085	166
81086	167
81087	167
81088	167
81098W00	607
81099W00	607
81100W00	607
81102W00	607
81103W00	607
81104W00	607
81106W00	607
81107W00	607
81108W00	607
81172W30	587
81181W30	589
81184W30	589
81187W30	589
81199W30	587
81200W30	587
81223W30	481
81223W60	481
81229W30	481
81229W60	481
81290W07	571
81292W07	571
81321V45	587
81343W07	571
81410	179
81411	179
81413	179
81414	179
81416	179
81417	179
81418	181
81419	181
81420	181
81421	181
81422	183
81423	183
81424	179
81425	183
81426	179
81427	179
81430	179
82198	680
82199	680
82202	680
82270W07	507
82270W12	507
82701W07	577
82703W07	577
82846	680
82847	680
82850	681
	683
82851	681
	683
82903W30	149
82906W30	149

Code	Page
82909W30	149
82914M00	185
82914W00	185
82916M00	185
82916W00	185
82918M30	185
82918W30	185
82920M30	185
82920W30	185
82922M10	188
82922M30	188
82922M45	188
82922W10	188
82922W30	188
82922W45	188
82926M45	187
82926W45	187
82928M00	187
82928W00	187
82930M00	187
82930W00	187
82932M30	187
82932W30	187
82944M30	187
82944W30	187
82949M00	183
82949W00	183
82950M00	183
82950W00	183
82951M00	183
82951W00	183
83007	III
83008	59
	X
83009	XVII
83010	647
	XVII
83012	647
	XIX
83013	647
	XVII
83015	647
	XIX
83034	680
83041	XIV
83042	586
	589
	XIV
83051	151
83052	151
83054	151
83055	151
83058	IX
83059	IX
83060	IX
83061	IX
83062	XIII
83065	35
83066	X
83115	XXII
83116	XXII
83118	XXII
83119	XXII
83120	X
83121	X
83122	V
83129	671
83132	671
	672
	673
83133	671
83140	647
83143	VII
83144	XXIX
83145	XXIX
83148	XXX
83155	573
83159	IX
83177	658
	663
	677
	685
	XXVIII
83178	677

Code	Page
	XXVIII
83187	XXVII
83224	673
83235	589
83242	151
83243	XXIX
83244	XXIX
83246	503
83247	553
83248	553
83249	167
83250	167
83254	201
83255	201
83256	201
83257	201
83258	201
83259	201
83260	201
83261	201
83262	201
83263	201
83264	201
83265	201
83266	201
83267	201
83269	203
83271	203
83272	203
83273	203
83274	203
83275	203
83276	203
83277	203
83278	203
83279	203
83280	203
83281	203
83282	203
83283	205
83284	205
83285	205
83286	205
83287	205
83288	205
83291	205
83292	205
83293	205
83294	205
83295	205
83296	205
83297	197
83298	197
83309	195
83310	195
83311	195
83312	195
83313	195
83314	195
83316	195
83317	195
83318	195
83319	195
83322	29
	35
	37
	39
	41
	51
	55
	57
	59
	75
	79
	VIII
83323	45
	47
	49
	53
	55
	57
	77
	VIII
83328	585

Code	Page
83330	585
83331	585
83333	227
	229
	435
	437
	485
	557
	567
	569
	571
	589
	614
	651
	657
	658
	659
	660
	661
	663
	665
	675
	677
	679
	XIX
83336	165
83337	165
83338	165
83339	165
83340	165
83341	165
83347	159
83351	680
83352	680
83359	499
83361	42
83362	42
83363	42
83364	42
83365	42
83366	42
83367	43
83368	43
83369	43
83370	43
83371	43
83372	43
83373	42
83374	42
83375	42
83376	42
83377	42
83378	42
83379	43
83380	43
83381	43
83382	29
	43
83383	29
	43
83384	29
	43
83387	683
83390	43
83391	43
83392	43
83393	43
83394	43
83395	43
83396	667
83397	667
83398	667
83399	667
83400	667
83401	667
83402	667
83403	667
83412	179
83413	179
83414	179
83415	179
83416	179
83417	179
83418	181

Code	Page	Code	Page	Code	Page	Code	Page	Code	Page	Code	Page
83419	181	84829	XI		439	90287	297	97355W18	597	98956	673
83420	181	84864	XXXIII		441	90288	297	97356W18	597	98964	665
83421	181	84865	XXXIV		445	90296	107	97799W30	591	98965	672
83422	181	84866	XXXIII		449	90297	107	97799W60	591	98985	XXX
83423	183	84867	XXXIII		III	90320	381	97800W30	591	98989	XXXIV
83424	183	84869	XXXIV	89148	XV	90320M	381	98009	579	98990	653
83425	183	84870	XXXIV	89149	XV	90322	381	98049	443		XXXIV
83426	183	84871	XXXIV	89150	XV	90322M	381	98060	649	98991	XXXIV
83427	183	84872	XXXIII	89151	XV	90324	381	98111	569	99002	XXXIII
83428	179	84873	XXXIII	89175	XVIII	90324M	381		571	99045	XXIX
83429	179	84874	XXXIII	89176	XVIII	90332	381	98112	505	99046	XXIX
83430	179	84875	XXXIII	89177	XVIII	90332M	381		511	99074	XIV
83431	179	84876	XXXIII	89179	567	90333	381	98121	595	99093	IV
83558W18	597	84885	XXXIV		569	90333M	381	98122	585	99105	29
83560W18	597	84887	XXXIII		571	90334	381	98140	XXIX		45
83567W00	591	84888	XXXIII		586	90334M	381	98148	649		47
83567W08	591	84890	505		589	90345	351	98149	586		61
83567W30	591		511		XVII	90346	351	98291	589		63
83577W85	511	84892	XXXIII	89186	XXIX	90347	351	98292	589		79
83579M70	573	84893	593	89188	586	90348	283	98395	673		439
83579W70	573		XXXIV	89189	XXX	90349	283	98418	673		441
83581M70	573	84894	593	89190	586	90520M30	501	98419	673		445
83581W70	573		XXXIV	89223	663	90520M60	501	98420	673		449
83583W70	575	84895	XXXIV		665	90520W30	501	98436	VI		IV
83585W70	575	84901	439	89359	586	90520W60	501		VII	99106	29
83601M07	569		441		589	90522M30	501		X		59
83601W07	569	84902	445		XVII	90522M60	501	98437	586		IV
83602M07	569	84915	439	89371	503	90522W30	501	98476	586	99112	151
83602W07	569		441	89373	29	90522W60	501	98477	586		IV
83604W07	569		569		35	90762M30	47	98513	511	99115	51
83943M00	185		573		37	90762M60	47	98530	49		59
83943W00	185		577		39	90762W30	47	98549	501		61
83944M00	185		581		53	90762W60	47	98550	501		63
83944W00	185		590		481	91352Z30	437	98624	499		73
83945M00	185	84916	435	89374	29	91366C30	435		501		75
83945W00	185		437		35	91366W30	435		503		79
83946M30	189		447		37	91749M30	51	98669	499		VII
83946M45	189	84917	437		39	91749M60	51		503	99126	IV
83946W30	189	84918	590		53	91749W30	51	98695	643	99128	IV
83946W45	189		597		481	91749W60	51	98729	643	99129	61
83947M85	189	84935	595	89408	435	92065W00	591	98885	673		63
83947W85	189	84936	595		437	92065W15	591	98886	673		IV
83948M20	189	84952	425		XI	92065W30	591	98887	673	99135	47
83948M35	189	84994	XXXIV	89419	569	92066W30	591	98888	673		IV
83948M60	189	84995	425		573	92067N00	591	98890	673	99141	VI
83948W20	189	85001W30	437		577	92067N30	591	98891	671	99146	151
83948W35	189	85002W30	437		581	92067W00	591	98892	671		IV
83948W60	189	85335C30	435		590	92067W15	591	98895	672	99147	35
84010	179	85335W30	435	89420	XV	92067W30	591	98896	672		37
84011	179	85543M70	573		499	92067W60	591	98897	672		39
84016	179	85543W70	573		511	92068N00	591	98898	672		41
84017	181	86460M70	573		573	92068N30	591	98899	672		45
84031W20	647	86460W70	573		575	92068W00	591	98900	672		47
84031W40	647	86563W70	575		590	92068W15	591	98901	672		49
84071W07	569	86612Z60	439		XV	92068W30	591	98902	672		53
84078M70	573	86708Z30	437	89421	481	92068W60	591	98904	673		55
84078W70	573	87340Z00	447		569	92077W00	591	98906	672		57
84242W30	503	87988M70	573		573	92260W00	581	98907	672		59
84242W60	503	87988W70	573		577	92262W00	581	98912	673		73
84244W30	503	87989W70	575		581	92443N12	643	98913	673		75
84244W60	503	88417C30	437		586	92444N12	643	98914	673		77
84335	437	88417W30	437		589	92671W70	573	98915	673		IV
	447	88568Z30	439		590	92672W70	575	98916	672	99175	XV
84336	439	88568Z60	439		595	92681W12	579	98917	672	99176	XV
	441	89144	435		XV	95126Z60	501		673	99177	XV
	569		437	89422	597	95330Z60	501	98918	672		XXIX
	577		439		649	95474W00	589	98921	673	99184	501
	581		441		XV	95475W00	589	98922	673	99185	595
	590		443	89423	597	96976M07	569	98925	671		599
84338	573		III		649	96976W07	569	98928	671		601
	575	89145	435		XV	96977M07	569	98931	671	99185	XVI
84341	597		437	89488	567	96977W07	569	98941	671	99186	499
84446	671		439		569	96979W07	569		672		505
84538W85	505		441		571	97071W85	511		673		511
84541W85	505		443		586	97073W85	511	98942	671		573
84544W85	505		III		589	97315N30	649		672		575
84562W85	511	89146	45		XVII	97315W00	649		673		590
84563W85	511		47	89548	653	97315W15	649	98943	671		XVI
84581W50	91		49	90281	107	97315W30	649		672	99195	437
84584W50	91		437	90282	107	97315W60	649		673		III
84626	XIII		III	90283	117	97353N18	597	98944	671	99198	51
84700	XII	89147	29	90284	117	97353W18	597		672		75
84701	XII		45	90285	117	97354N18	597	98950	426		IV
84787	XIII		47	90286	297	97354W18	597	98954	671	99216	586

Code	Page
99226	643
99227	643
99229	643
	XXXIII
99234	XXIX
99235	XXIX
99237	XXXIII
99239	IV
99243	73
	75
	III
99260	IV
99261	IV
99262	VII
99269	XVI
99307	III
99308	XXI
99309	XX
99310	XX
99311	XXI
99330	151
	IX
99331	29
	45
	47
	227
	229
	437
	439
	441
	445
	449
	485
	557
	614
	651
	657
	658
	659
	660
	661
	663
	665
	666
	675
	677
	679
	XVIII
99332	227
	229
	435
	437
	485
	557
	567
	569
	571
	589
	614
	651
	657
	677
	679
	XVIII
99332	227
	229
	435
	437
	485
	557
	567
	569
	571
	589
	614
	651
	657
	677
	679
	XVIII
99340	XVI
99342	481
	586
	589
	XV
99345	47
	IX
99346	XXXIV

Code	Page
99353	XXXIII
99355	XXXI
99360	VI
99361	VII
99362	X
99370	III
99371	XII
99372	XII
99373	X
99374	29
	45
	47
	227
	229
	435
	437
	439
	441
	445
	449
	485
	557
	614
	651
	657
	658
	659
	660
	661
	663
	665
	675
	677
	679
	XI
99375	51
	59
	79
	435
	437
	439
	441
	443
	III
99376	29
	45
	47
	61
	63
	439
	441
	445
	449
	III
99377	29
	45
	47
	49
	437
	III
99379	XXXIV
99386	XXX
99485	77
99486	77
99487	77
99488	77
99489	77
99490	77
99497	79
99498	79
99499	79
99500	79
99501	79
99502	79
99520	653
99521	652
99538	680
99539	680
99549	680
99550	77
99552	77
99554	77
99556	95
99560	589

Code	Page
99584	95
99650	586
	589
99651	586
99658	XXX
99660	586
	589
	XIV
99682	XII
99683	XIII
99688	681
	683
99689	681
	683
99708	XI
99709	XI
99710	29
	45
	47
	439
	441
	445
	449
	XI
99711	XI
99712	XI
99713	29
	45
	47
	439
	441
	445
	449
	XI
99716	XV
99717	V
99718	V
99722	227
	229
	435
	437
	XIX
99725	XIII
99732	29
	35
	37
	39
	41
	51
	55
	57
	75
	VII
99733	35
	37
	39
	41
	45
	47
	49
	53
	55
	57
	VII
99734	29
	35
	37
	39
	41
	45
	47
	55
	57
	IV
99735	35
	37
	39
	41
	45
	47
	49
	53
	55
	57

Code	Page
	77
	IV
99739	VII
99740	IV
99744	571
99784	173
	201
	658
	663
	677
	685
	XVIII
99785	173
	201
	658
	663
	677
	685
	XVIII
99786	586
	589
	683
	XVIII
99802	501
99808	151
99809	151
99810	151
99827	151
99828	151
99829	151
99841	151
99842	151
99843	151
99844	151
99849	35
99855	589
99888	53
99889	53
99890	53
99898	95
99899	53
99971.02	95
	IX
99983	671
C0010MFL01004	679
C0010MFL03004	679
C0010MFL05004	679
C0010MML01004	679
C0010MML03004	679
C0010MML05004	679
C0010WFL01004	679
C0010WFL03004	679
C0010WFL05004	679
C0010WML01004	679
C0010WML03004	679
C0010WML05004	679
C0011MFL01004	679
C0011MFL03004	679
C0011MFL05004	679
C0011MML01004	679
C0011MML03004	679
C0011MML05004	679
C0011WFL01004	679
C0011WFL03004	679
C0011WFL05004	679
C0011WML01004	679
C0011WML03004	679
C0011WML05004	679
C0012MDI01004	651
C0012MDI05004	651
C0012MDI10004	651
C0012VDI01004	651
C0012VDI05004	651
C0012WDI01004	651
C0012WDI05004	651
C0012WDI10004	651
C0013MDI01004	675
C0013MDI05004	675
C0013MDI10004	675
C0013WDI01004	675
C0013WDI05004	675
C0013WDI10004	675
C0014DDI01004	675
C0014DDI05004	675

Code	Page
C0014MDI01004	675
C0014MDI05004	675
C0014MDI10004	675
C0014VDI01004	675
C0014VDI05004	675
C0014VDI10004	675
C0014WDI05004	675
C0014WDI10004	675
C0015MDI01004	675
C0015MDI05004	675
C0015MDI10004	675
C0015WDI01004	675
C0015WDI05004	675
C0015WDI10004	675
C0016MDI05004	677
C0016MDI10004	677
C0016VDI01004	677
C0016VDI05004	677
C0016VDI10004	677
C0016WDI05004	677
C0016WDI10004	677
C0017WDI01004	677
C0017WDI05004	677
C0017WDI10004	677
C0018MDI05019	665
C0018NDI05019	665
C0018WDI05019	665
C0019MDI05019	665
C0019NDI05019	665
C0019WDI05019	665
C0020MDI02517	197
	685
C0020MDI05017	197
	685
C0020MDI10017	197
	685
C0020NDI02517	197
	685
C0020NDI05017	197
	685
C0020NDI10017	197
	685
C0020WDI02517	197
	685
C0020WDI05017	197
	685
C0020WDI10017	197
	685
C0021MDI05000	659
C0021NDI05000	659
C0021WDI05000	659
C0022MDI05000	659
C0022NDI05000	659
C0022WDI05000	659
C0023MDI05000	661
C0023NDI05000	661
C0023WDI05000	661
C0024MDI05000	661
C0024NDI05000	661
C0024WDI05000	661
C0025MDI05019	665
C0025NDI05019	665
C0025VDI05019	665
C0025WDI05019	665
C0026MDI05019	665
C0026NDI05019	665
C0026WDI05019	665
C0027DDI05000	660
C0027MDI05000	659
C0027NDI05000	659
C0027SDI05000	660
C0027VDI05000	660
C0027WDI05000	659
C0028MDI05000	661
C0028NDI05000	661
C0028WDI05000	661
C0029MDI05000	659
C0029NDI05000	659
C0029WDI05000	659
C0030MDI05000	661
C0030NDI05000	661
C0030WDI05000	661
C0031MDI05000	661
C0031NDI05000	661

Code	Page
C0031WDI05000	661
C0033MDI05000	657
C0033NDI05000	657
C0033WDI05000	657
C0034MDI05019	614
C0034NDI05019	614
C0034WDI05019	614
C0036MDI05000	657
C0036NDI05000	657
C0036WDI05000	657
C0037MDI05000	660
C0037NDI05000	660
C0037WDI05000	660
C0039MDI05000	659
C0039NDI05000	659
C0039WDI05000	659
C0040MDI05000	661
C0040NDI05000	661
C0040WDI05000	661
C0041MDI05000	657
C0041NDI05000	657
C0041WDI05000	657
C0042MDI05000	657
C0042NDI05000	657
C0042WDI05000	657
C0043MDI05000	657
C0043NDI05000	657
C0043WDI05000	657
C0044MDI05000	657
C0044NDI05000	657
C0044WDI05000	657
C0045MDI05000	658
C0045NDI05000	658
C0045WDI05000	658
C0046MDI05000	658
C0046NDI05000	658
C0046WDI05000	658
C0047MDI05000	658
C0047NDI05000	658
C0047WDI05000	658
C0048MDI05000	658
C0048NDI05000	658
C0048WDI05000	658
C0049MDI20000	658
C0049NDI20000	658
C0049WDI20000	658
C0050MDI15000	658
C0050NDI15000	658
C0050WDI15000	658
C0051MDI05019	663
C0051NDI05019	663
C0051WDI05019	663
C0052MDI05019	485
	557
	663
C0052NDI05019	663
C0052WDI05019	485
	557
	663
C0053MDI05019	663
C0053NDI05019	663
C0053WDI05019	663
C0054MDI05019	663
C0054NDI05019	663
C0054WDI05019	663
C0055MDI15030	663
C0055NDI15030	663
C0055WDI15030	663
C0056VDI00504	683
C0056VDI01004	683
C0056VDI05004	683
C0057MDI05004	675
C0057MDI10004	675
C0057WDI05004	675
C0060MDI01019	183
C0060MDI02519	183
C0060MDI05019	183
C0060WDI01019	183
C0060WDI02519	183
C0060WDI05019	183
C0064MDI05000	657
C0064NDI05000	657
C0064WDI05000	657

Code	Page	Code	Page	Code	Page	Code	Page	Code	Page	Code	Page
C0065MDI05019	663	C00183WHWWF	57	C00440BBNFL	157	C00754WHEZZ	38	CA004DBBMNDI	323	CA032JWHWFL	67
C0065NDI05019	663	C00184WHWFL	57	C00440BBNWF	157	C00755BEZZ	34	CA004DWHMDI	323	CA032JWHWMW	67
C0065WDI05019	663	C00184WHWWF	57	C00440BBWFL	157	C00755WHEZZ	34	CA005DBBMNDI	323	CA033AWHMFL	69
C00048WHMFL	45	C00187WHWZZ	173	C00440BBWWF	157	C00771WHMML	29	CA005DWHMDI	323	CA033AWHMMW	69
C00048WHMWF	45	C00188WHWZZ	173	C00440WHNFL	157	C00771WHMWF	29	CA006DBBMNDI	323	CA033AWHWFL	69
C00048WHWFL	45	C00189WHWZZ	173	C00440WHNWF	157	C00771WHWML	29	CA006DWHMDI	323	CA033AWHMMW	69
C00048WHWWF	45	C00191WHWZZ	173	C00440WHWFL	157	C00771WHWWF	29	CA007DBBMNDI	327	CA034AWHMFL	71
C00052WHMFL	47	C00230WHWUS	421	C00440WHWWF	157	C00832WHWDZ	175	CA007DWHMDI	327	CA034AWHMMW	71
C00052WHMWF	47	C00231WHWUS	421	C00467BBWWF	483	C00833WHWDZ	175	CA008DBBMNDI	327	CA034AWHWFL	71
C00052WHWFL	47	C00232WHWUS	421	C00467WHWWF	483	C00834WHWDZ	175	CA008DWHMDI	327	CA034AWHMMW	71
C00052WHWWF	47	C00233WHWUS	421	C00471BBWWF	483	C00844WHWDZ	175	CA009DBBMNDI	327	CA035ABBMFL	137
C00058WHMFL	49	C00236WHWWW	423	C00471WHWWF	483	C00845WHWDZ	175	CA009DWHMDI	327	CA035ABBMW	137
C00058WHMWF	49	C00237WHWWW	423	C00477CHWXF	425	C00846WHWDZ	175	CA010DBBMNDI	329	CA035ABWFL	137
C00058WHWFL	49	C00238NKWWW	423	C00477NKWXF	425	C00880BBWDI	163	CA010DWHMDI	329	CA035ABBMW	137
C00058WHWWF	49	C00239NKWWW	423	C00478CHWXF	425	C00880WHWDI	163	CA011DBBMNDI	329	CA035AWHMFL	137
C00144WHMML	40	C00247WHWZZ	173	C00478NKWXF	425	C00908GGNDI	641	CA011DWHMDI	329	CA035AWHMMW	137
C00144WHMMW	40	C00248WHWZZ	173	C00487BBWML	501	C00909GGNDI	641	CA021ABEZZ	293	CA035AWHWFL	137
C00144WHWML	40	C00249WHWZZ	173	C00487BBWWF	501	C00910GGNDI	641	CA021ABEZZ	293	CA035AWHMMW	137
C00144WHMMW	40	C00251WHWZZ	173	C00487DBWML	501	C00911GGNDI	641	CA021ADBEZZ	293	CA035JBBMFL	137
C00146WHMML	41	C00258BBMML	39	C00487DBWWF	501	C00912GGNDI	641	CA021AGBEZZ	293	CA035JBBMMW	137
C00146WHMMW	41	C00258BBMMW	39	C00579WHMFL	29	C00973BBWFL	161	CA021AWHEZZ	293	CA035JBBWFL	137
C00146WHWML	41	C00258BBWML	39	C00579WHMWF	29	C00973BBWWF	161	CA022ABEZZ	293	CA035JBBWMW	137
C00146WHWMW	41	C00258BBWMW	39	C00579WHWFL	29	C00973WHWFL	161	CA022ABEZZ	293	CA035JWHMFL	137
C00150BBWML	61	C00258WHMML	39	C00579WHWWF	29	C00973WHWWF	161	CA022ADBEZZ	293	CA035JWHMMW	137
C00150WHWML	61	C00258WHMMW	39	C00580WHMFL	29	C00973WHWML	157	CA022AGBEZZ	293	CA035JWHWFL	137
C00152BBWML	61	C00258WHWML	39	C00580WHMWF	29	C00997BBWWF	157	CA022AWHEZZ	293	CA035JWHWMW	137
C00152WHWML	61	C00258WHWMW	39	C00580WHWFL	29	C00997WHWML	157	CA023ABEZZ	353	CA036DBMDI	374
C00174BBWFL	53	C00259CHWML	435	C00580WHWWF	29	C00997WHWWF	157	CA023ABEZZ	353	CA036DBWDI	374
C00174BBWWF	53	C00259WHMMW	435	C00581WHMML	31	C01038WHMFL	45	CA023ADBEZZ	353	CA036DMGMDI	374
C00174WHWFL	53	C00263CHNMW	437	C00581WHMWF	31	C01038WHMMW	45	CA023AGBEZZ	353	CA036DMGWDI	374
C00174WHWWF	53	C00263CHWMW	437	C00581WHWML	31	C01038WHWFL	45	CA023AWHEZZ	353	CA036DWHMDI	374
C00176BBWFL	53	C00263NKNMW	437	C00581WHWWF	31	C01038WHWMW	45	CA024ABEZZ	353	CA037DBBMDI	375
C00176BBWWF	53	C00263NKWMW	437	C00582WHMFL	31	C01041WHMFL	47	CA024ABEZZ	353	CA037DBBWDI	375
C00176WHWFL	53	C00263WHMMW	437	C00582WHMWF	31	C01041WHWFL	47	CA024AGBEZZ	353	CA037DMGMDI	375
C00176WHWWF	53	C00263WHNMW	437	C00582WHWFL	31	C01045BBWFL	449	CA025ADNEZZ	289	CA037DWHMDI	375
C00177BBMFL	54	C00263WHWMW	437	C00582WHWWF	31	C01045WHWFL	449	CA025ADUEZZ	289	CA037DWHWDI	375
C00177BBWWF	54	C00264WHMMW	437	C00613BBMFL	35	C01046BBWFL	449	CA025AEUEZZ	289	CA038DBBWDI	375
C00177BBWFL	54	C00269CHWMW	439	C00613BBMMW	35	C01046WHWFL	449	CA025AEUEZZ	289	CA038DBBWDI	375
C00177BBWWF	54	C00269WHMMW	439	C00613BBWFL	35	C01047BBMFL	499	CA025AGUEZZ	289	CA038DMGMDI	375
C00177WHMFL	54	C00269WHMMW	439	C00613BBWMW	35	C01047BBMML	499	CA025AGUEZZ	289	CA038DMGWDI	375
C00177WHMWF	54	C00270GGWRU	601	C00613WHMFL	35	C01047BBWWF	499	CA025AKBEZZ	289	CA038DWHMDI	375
C00177WHNFL	54	C00273CHWMW	439	C00613WHMWF	35	C01047BBWFL	499	CA025AKWEZZ	289	CA038DWHWDI	375
C00177WHNWF	54	C00273CHWWF	439	C00613WHWMW	35	C01047BBWML	499	CA025AWUEZZ	289	CA039DBBWDI	375
C00177WHWFL	54	C00273NKWMW	439	C00613WHWWF	35	C01047WHWFL	499	CA026DBBMDI	333	CA039DMGMDI	375
C00177WHWWF	54	C00273NKWFL	439	C00632WHMML	37	C01047WHWML	499	CA026DBBWDI	333	CA039DMGWDI	375
C00178BBMFL	55	C00273WHNMW	439	C00632WHMWF	37	C01052CHWML	591	CA026DWHMDI	333	CA039DWHMDI	375
C00178BBWWF	55	C00273WHWML	439	C00636BBMFL	39	C01052CHWSP	591	CA026DWHWDI	333	CA040DBBMDI	376
C00178WHMFL	55	C00273WHWMW	439	C00636BBWFL	39	C01052SNMFL	591	CA027KBBMDI	331	CA040DBBWDI	376
C00178WHMWF	55	C00275WHMMW	441	C00636BBWWF	39	C01052SWDI	591	CA027KBBWDI	331	CA040DMGMDI	376
C00178WHNFL	55	C00276WHMMW	441	C00636BBWML	39	C01052SWFL	591	CA027KWHWML	331	CA040DMGWDI	376
C00178WHNWF	55	C00278BBWMW	443	C00636BHWML	39	C01052SWML	591	CA028KBBMDI	331	CA040DWHMDI	376
C00178WHWFL	55	C00278BBWWF	443	C00636BHWWF	39	C01052SWWF	591	CA028KBBWDI	331	CA040DWHWDI	376
C00178WHWWF	55	C00278WHMMW	443	C00636BHWML	39	C01052SWSP	591	CA028KWHMDI	331	CA041DBBMDI	377
C00179BBMFL	55	C00278WHWWF	443	C00640BBMML	35	C01052NKMDI	591	CA028KWHWDI	331	CA041DMGMDI	377
C00179BBWWF	55	C00282BWWML	445	C00640BBMWF	35	C01052NKWFL	591	CA028SBWMDI	331	CA041DMGWDI	377
C00179BBWFL	55	C00282WHWML	445	C00640BBWML	35	C01052NKWML	591	CA028SWHMDI	331	CA041DWHMDI	377
C00179BBWWF	55	C00371WHMML	40	C00640BBWWF	35	C01052NKWSP	591	CA029AWHMFL	65	CA042DBBMDI	377
C00179WHMFL	55	C00371WHWML	40	C00640WHMFL	35	C01059BBWDI	227	CA029AWHMMW	65	CA042DBBWDI	377
C00179WHMWF	55	C00373WHMML	41	C00640WHWFL	35	C01059WHWDI	227	CA029AWHWWF	65	CA042DMGMDI	377
C00179WHNFL	55	C00373WHWML	41	C00644WHMML	37	C01060BBWDI	227	CA029AWHWWF	65	CA042DMGWDI	377
C00179WHNWF	55	C00373WHWWF	41	C00644WHWML	37	C01061BBWDI	227	CA030AWHMMW	65	CA042DWHMDI	377
C00179WHWFL	55	C00400BBWML	79	C00644WHWWF	37	C01061WHWDI	227	CA030AWHWFL	65	CA043DBBMDI	377
C00180BBMFL	55	C00400BBWWF	79	C00709BBMML	503	C01062BBWDI	227	CA030AWHMMW	65	CA043DBBWDI	377
C00180BBWWF	55	C00400WHMML	79	C00709BBMMW	503	C01062WHWDI	227	CA030JWHMFL	65	CA043DMGMDI	377
C00180BBWFL	55	C00406WHNWF	59	C00709BBWML	503	C01063BBWDI	227	CA030JWHMWF	65	CA043DWHMDI	377
C00180BBWWF	55	C00406WHWWF	59	C00709BBWML	503	C01063WHWDI	227	CA030JWHWWF	65	CA043DWHWDI	377
C00180WHMFL	55	C00407WHNWF	59	C00709DBMMW	503	C01130WSNDI	95	CA031AWHMFL	67	CA050DBBMDI	357
C00180WHMWF	55	C00409WHNWF	59	C00709DBWML	503	C01131WSNDI	95	CA031AWHMMW	67	CA050DBBWDI	357
C00180WHNFL	55	C00413BBWDI	229	C00709DBWWF	503	C01132WSNDI	95	CA031AWHWFL	67	CA050DBEMDI	357
C00180WHNWF	55	C00413BWWDI	229	C00709GRWML	503	CA0011DBBMDI	325	CA031AWHMMW	67	CA050DBEMDI	357
C00180WHWFL	55	C00414BWWDI	229	C00713BGWSR	605	CA0011DWHMDI	325	CA032AWHMFL	67	CA050DBEMDI	357
C00180WHWWF	55	C00414WHWDI	229	C00713BWSR	605	CA002DDBBMDI	325	CA032AWHMMW	67	CA050DBEMDI	357
C00181WHWFL	57	C00415BWWDI	229	C00714BGRWD	605	CA002DWHMDI	325	CA032JWHMFL	67	CA050DWHMDI	357
C00181WHWWF	57	C00415WHWDI	229	C00715SEWRU	597	CA003DBBMDI	325	CA032JWHMMW	67	CA050DWHWDI	357
C00182WHWFL	57	C00416BWWDI	229	C00715SEWRU	597	CA003DWHMDI	325				
C00182WHWWF	57	C00416WHWDI	229								
C00183WHWFL	57										

Code	Page	Code	Page	Code	Page	Code	Page	Code	Page	Code	Page
CA051DBBMDI	123	CA065DGBMDI	87	CA084DLUMDI	119	CA093DBBMDI	311	CA112DBBMDI	215	CA129CPLWDI	275
CA051DBBWDI	123	CA065DGBWDI	87	CA084DLUWDI	119	CA093DBBWDI	311	CA112DBBWDI	215	CA130CPLWDI	109
CA051DBEMDI	123	CA065DLUMDI	87	CA084DWHMDI	119	CA093DBEMDI	311	CA112DCHMDI	215	CA131CPLWDI	109
CA051DBEWDI	123	CA065DLUWDI	87	CA084DWHWDI	119	CA093DBEWDI	311	CA112DCHWDI	215	CA139DBBMDI	333
CA051DGBMDI	123	CA065DWHMDI	87	CA085DBBMDI	119	CA093DGBMDI	311	CA112DHGMDI	215	CA139DBBWDI	333
CA051DGBWDI	123	CA065DWHWDI	87	CA085DBBWDI	119	CA093DGBWDI	311	CA112DHGWDI	215	CA139DWHMDI	333
CA051DLUMDI	123	CA066DBBMDI	87	CA085DBEMDI	119	CA093DLUMDI	311	CA112DWHMDI	215	CA139DWHWDI	333
CA051DLUWDI	123	CA066DBBWDI	87	CA085DBEWDI	119	CA093DLUWDI	311	CA112DWHWDI	215	CA140ABBMDI	259
CA051DWHMDI	123	CA066DBEMDI	87	CA085DGBMDI	119	CA093DWHMDI	311	CA113DBBMDI	215	CA140ABBWDI	259
CA051DWHWDI	123	CA066DBEWDI	87	CA085DGBWDI	119	CA093DWHWDI	311	CA113DBBWDI	215	CA140ACHMDI	259
CA052DBBMDI	123	CA066DGBMDI	87	CA085DLUMDI	119	CA094DBBMDI	311	CA113DCHMDI	215	CA140ACHWDI	259
CA052DBBWDI	123	CA066DGBWDI	87	CA085DLUWDI	119	CA094DBBWDI	311	CA113DCHWDI	215	CA140AHGMDI	259
CA052DBEMDI	123	CA066DLUMDI	87	CA085DWHMDI	119	CA094DBEMDI	311	CA113DHGMDI	215	CA140AHGWDI	259
CA052DBEWDI	123	CA066DLUWDI	87	CA085DWHWDI	119	CA094DBEWDI	311	CA113DHGWDI	215	CA140AWHMDI	259
CA052DGBMDI	123	CA066DWHMDI	87	CA086DBBMDI	303	CA094DGBMDI	311	CA113DWHMDI	215	CA140AWHWDI	259
CA052DGBWDI	123	CA066DWHWDI	87	CA086DBBWDI	303	CA094DGBWDI	311	CA113DWHWDI	215	CA141ABBMDI	259
CA052DLUMDI	123	CA070DBBMDI	299	CA086DBEMDI	303	CA094DLUMDI	311	CA116DB4WDI	535	CA141ABBWDI	259
CA052DLUWDI	123	CA070DBBWDI	299	CA086DBEWDI	303	CA094DLUWDI	311	CA116DB7WDI	535	CA141ACHMDI	259
CA052DWHMDI	123	CA070DBEMDI	299	CA086DGBMDI	303	CA094DWHMDI	311	CA116DD4WDI	535	CA141ACHWDI	259
CA052DWHWDI	123	CA070DBEWDI	299	CA086DGBWDI	303	CA094DWHWDI	311	CA116DD7WDI	535	CA141AHGMDI	259
CA053DBBMDI	123	CA070DGBMDI	299	CA086DLUMDI	303	CA095DWHMDI	131	CA116DE4WDI	535	CA141AHGWDI	259
CA053DBBWDI	123	CA070DGBWDI	299	CA086DLUWDI	303	CA095DWHWDI	131	CA116DE7WDI	535	CA141AWHMDI	259
CA053DBEMDI	123	CA070DLUMDI	299	CA086DWHMDI	303	CA096DWHMDI	409	CA116DG4WDI	535	CA141AWHWDI	259
CA053DBEWDI	123	CA070DLUWDI	299	CA086DWHWDI	303	CA096DWHWDI	409	CA116DG7WDI	535	CA142ABBMDI	259
CA053DGBMDI	123	CA070DWHMDI	299	CA087DBBMDI	303	CA097DWHMDI	131	CA117ABBMDI	627	CA142ABBWDI	259
CA053DGBWDI	123	CA070DWHWDI	299	CA087DBBWDI	303	CA097DWHWDI	131	CA117ABBWDI	627	CA142ACHMDI	259
CA053DLUMDI	123	CA074DB1WDI	529	CA087DBEMDI	303	CA098DWHMDI	409	CA117ADBMDI	627	CA142ACHWDI	259
CA053DLUWDI	123	CA074DB2WDI	529	CA087DBEWDI	303	CA098DWHWDI	409	CA117ADBWDI	627	CA142AHGMDI	259
CA053DWHMDI	123	CA074DB3WDI	529	CA087DGBMDI	303	CA103DBBEZZ	209	CA118ABBMDI	627	CA142AHGWDI	259
CA053DWHWDI	123	CA074DD1WDI	529	CA087DGBWDI	303	CA103DCHEZZ	209	CA118ABBWDI	627	CA142AWHMDI	259
CA054DBBMDI	307	CA074DD2WDI	529	CA087DLUMDI	303	CA103DHEZZ	209	CA118ADBMDI	627	CA142AWHWDI	259
CA054DBBWDD	307	CA074DD3WDI	529	CA087DLUWDI	303	CA103DWEZZ	209	CA118ADBWDI	627	CA143ABBMDI	259
CA054DBEMDD	307	CA074DE1WDI	529	CA087DWHMDI	303	CA104DBBEZZ	209	CA119ABBMDI	627	CA143ABBWDI	259
CA054DBEWDI	307	CA074DE2WDI	529	CA087DWHWDI	303	CA104DCHEZZ	209	CA119ABBWDI	627	CA143ACHMDI	259
CA054DGBMDI	307	CA074DE3WDI	529	CA088DBBMDI	303	CA104DHGEZZ	209	CA119ADBMDI	627	CA143ACHWDI	259
CA054DGBWDD	307	CA074DG1WDI	529	CA088DBBWDI	303	CA104DWEZZ	209	CA119ADBWDI	627	CA143AHGMDI	259
CA054DLUMDD	307	CA074DG2WDI	529	CA088DBEMDI	303	CA105DBBEZZ	209	CA120DB1WDI	529	CA143AHGWDI	259
CA054DLUWDD	307	CA074DG3WDI	529	CA088DBEWDI	303	CA105DCHEZZ	209	CA120DB2WDI	529	CA143AWHMDI	259
CA054DWHMDD	307	CA075DBBMDI	385	CA088DGBMDI	303	CA105DHGEZZ	209	CA120DB3WDI	529	CA143AWHWDI	259
CA054DWHWDD	307	CA075DBBWDI	385	CA088DGBWDI	303	CA105DWEZZ	209	CA120DD1WDI	529	CA144ABBMDI	259
CA055DBBMDI	307	CA075DBBMDI	385	CA088DLUMDI	303	CA106RBBEZZ	209	CA120DD2WDI	529	CA144ABBWDI	259
CA055DBBWDD	307	CA075DBBWDI	385	CA088DLUWDI	303	CA106RCHEZZ	209	CA120DD3WDI	529	CA144ACHMDI	259
CA055DBEMDD	307	CA075DWHMDI	385	CA088DWHMDI	303	CA106RGEZZ	209	CA120DE1WDI	529	CA144ACHWDI	259
CA055DBEWDI	307	CA075DWHWDI	385	CA088DWHWDI	303	CA106RWEZZ	209	CA120DE2WDI	529	CA144AHGMDI	259
CA055DGBMDD	307	CA076DBBMDI	317	CA089DBBMDI	127	CA107DBBMDI	213	CA120DE3WDI	529	CA144AHGWDI	259
CA055DGBWDD	307	CA076DBBWDD	317	CA089DBBWDI	127	CA107DBBWDI	213	CA120DG1WDI	529	CA144AWHMDI	259
CA055DLUMDD	307	CA076DDBMDD	317	CA089DBEWDI	127	CA107DCHMDI	213	CA120DG2WDI	529	CA144AWHWDI	259
CA055DLUWDD	307	CA076DDBWDD	317	CA089DBEMDI	127	CA107DCHWDI	213	CA120DG3WDI	529	CA145ABBMDI	261
CA055DWHMDD	307	CA076DWHMDD	317	CA089DGBMDI	127	CA107DHGMDI	213	CA121DB1WDI	529	CA145ABBWDI	261
CA055DWHWDD	307	CA076DWHWDD	317	CA089DGBWDI	127	CA107DHGWDI	213	CA121DB2WDI	529	CA145ACHMDI	261
CA056DBBMDI	307	CA077DBBMDI	317	CA089DLUMDI	127	CA107DWHMDI	213	CA121DB3WDI	529	CA145ACHWDI	261
CA056DBBWDD	307	CA077DBBWDD	317	CA089DLUWDI	127	CA107DWHWDI	213	CA121DD1WDI	529	CA145AHGMDI	261
CA056DBEMDD	307	CA077DDBMDD	317	CA089DLWMDI	127	CA108DBBMDI	213	CA121DD2WDI	529	CA145AHGWDI	261
CA056DBEWDI	307	CA077DDBWDD	317	CA089DWHMDI	127	CA108DBBWDI	213	CA121DD3WDI	529	CA145AWHMDI	261
CA056DGBMDD	307	CA077DWHMDD	317	CA090DBBMDI	127	CA108DCHMDI	213	CA121DE1WDI	529	CA145AWHWDI	261
CA056DGBWDD	307	CA077DWHWDD	317	CA090DBBWDI	127	CA108DCHWDI	213	CA121DE2WDI	529	CA146ABBMDI	105
CA056DLUMDD	307	CA078DBBMDI	317	CA090DBEMDI	127	CA108DHGMDI	213	CA121DE3WDI	529	CA146ABBWDI	105
CA056DLUWDD	307	CA078DBBWDD	317	CA090DBEWDI	127	CA108DHGWDI	213	CA121DG1WDI	529	CA146ACHMDI	105
CA056DWHMDD	307	CA078DDBMDD	317	CA090DGBMDI	127	CA108DWHMDI	213	CA121DG2WDI	529	CA146ACHWDI	105
CA056DWHWDD	307	CA078DDBWDD	317	CA090DGBWDI	127	CA108DWHWDI	213	CA121DG3WDI	529	CA146AHGMDI	105
CA057FBBMDI	465	CA078DWHMDD	317	CA090DLUMDI	127	CA109DBBMDI	213	CA122DB1WDI	529	CA146AHGWDI	105
CA057FBBWDD	465	CA078DWHWDD	317	CA090DLUWDI	127	CA109DBBWDI	213	CA122DB2WDI	529	CA146AWHMDI	105
CA057FBEMDI	465	CA079DBBMDI	317	CA090DWHMDI	127	CA109DCHMDI	213	CA122DB3WDI	529	CA146AWHWDI	105
CA057FBEWDD	465	CA079DBBWDD	317	CA090DWHWDI	127	CA109DCHWDI	213	CA122D1ABMDI	529	CA147ABBMDI	261
CA057FGBMDI	465	CA079DDBMDD	317	CA091DBBMDI	127	CA109DHGMDI	213	CA122D2ABMDI	529	CA147ABBWDI	261
CA057FGBWDD	465	CA079DDBWDD	317	CA091DBBWDI	127	CA109DHGWDI	213	CA122D3ABMDI	529	CA147ACHMDI	261
CA057FLUMDI	465	CA079DWHMDD	317	CA091DBEMDI	127	CA109DWHMDI	213	CA122D4ABMDI	529	CA147ACHWDI	261
CA057FLUWDD	465	CA079DWHWDD	317	CA091DBEWDI	127	CA109DWHWDI	213	CA122DE2WDI	529	CA147AHGMDI	261
CA057FWHMDI	465	CA083DBBMDI	119	CA091DGBMDI	127	CA110DBBMDI	213	CA122DE3WDI	529	CA147AHGWDI	261
CA057FWHWDI	465	CA083DBBWDI	119	CA091DGBWDI	127	CA110DBBWDI	213	CA122DG1WDI	529	CA147AWHMDI	261
CA064DBBMDI	87	CA083DBEMDI	119	CA091DLUMDI	127	CA110DCHMDI	213	CA122DG2WDI	529	CA147AWHWDI	261
CA064DBBWDI	87	CA083DBEWDI	119	CA091DLUWDI	127	CA110DCHWDI	213	CA122DG3WDI	529	CA148FBBMDI	477
CA064DBEMDI	87	CA083DGBMDI	119	CA091DWHMDI	127	CA110DHGMDI	213	CA126AWBWDI	273	CA148FBBWDI	477
CA064DBEWDI	87	CA083DGBWDI	119	CA091DWHWDI	127	CA110DHGWDI	213		341	CA148FCHMDI	477
CA064DGBMDI	87	CA083DLUMDI	119	CA092DBBMDI	311	CA110DWHMDI	213	CA126AWHWDI	273	CA148FCHWDI	477
CA064DGBWDI	87	CA083DLUWDI	119	CA092DBBWDI	311	CA110DWHWDI	213		341	CA148FHGMDI	477
CA064DLUMDI	87	CA083DWHMDI	119	CA092DBEMDI	311	CA111DBBMDI	215	CA126AX1WDI	273	CA148FHGWDI	477
CA064DLUWDI	87	CA083DWHWDI	119	CA092DBEWDI	311	CA111DBBWDI	215		341	CA148FHHMDI	477
CA064DWHMDI	87	CA084DBBMDI	119	CA092DGBMDI	311	CA111DCHMDI	215	CA126AX2WDI	273	CA148FHHWDI	477
CA064DWHWDI	87	CA084DBBWDI	119	CA092DGBWDI	311	CA111DCHWDI	215		341	C-C100004	41
CA065DBBMDI	87	CA084DBEMDI	119	CA092DLUMDI	311	CA111DHGMDI	215	CA126AX3WDI	273	C-C100006	49
CA065DBBWDI	87	CA084DBEWDI	119	CA092DLUWDI	311	CA111DHGWDI	215		341	C-C100007	41
CA065DBEMDI	87	CA084DGBMDI	119	CA092DWHMDI	311	CA111DWHMDI	215	CA127CPLWDI	275	C-C100016	31
CA065DBEWDI	87	CA084DGBWDI	119	CA092DWHWDI	311	CA111DWHWDI	215	CA128CPLWDI	275	C-C100017	31

Code	Page	Code	Page	Code	Page	Code	Page	Code	Page
C-C100020	31		590	C-E300002	XX	C-E700016	XXV	C-K400029	42
C-C300001	652		V	C-E300007	167	C-E700017	XXV	C-K400038	42
C-D100001	629	C-E100034	31		681	C-E700018	XXV	C-K400039	42
C-D100002	629		45	C-E300008	167	C-E700021	II	C-K400040	42
C-D100003	629		47		681	C-E700022	XXVII	C-K400041	42
C-D100004	629		449	C-E300009	173	C-E700023	XXVII	C-K400042	42
C-D100005	629		590		XI	C-E700032	XXI	C-K400043	42
C-D100006	629		IX	C-E300010	173	C-E700037	683	C-K400044	43
C-E100001	29	C-E100045	95		XI		XXIV	C-K400045	43
	45		IV	C-E400002	227	C-F100003	175	C-K400046	42
	47	C-E100046	45		229	C-F100004	211	C-K400047	42
	49		47		485	C-F100017	643	C-K400048	42
	59		449		557	C-F300001	687	C-K400049	42
	61		IV		614	C-F300002	687	C-K400050	42
	63	C-E100047	45		651	C-F300003	687	C-K400051	42
	79		47		657	C-F300004	687	C-K400052	43
	151		449		658	C-F300005	687	C-K400053	43
	VIII		590		659	C-F300006	687	C-K400054	43
C-E100004	29		VIII		660	C-F300007	687	C-K400055	43
	45	C-E100048	V		661	C-F300008	687	C-K400058	615
	47	C-E100049	V		663	C-F300009	687	C-K400059	615
	49	C-E100052	VI		665	C-F300010	687	C-K400060	615
	437	C-E100053	VI		675	C-F300013	231	C-K400061	615
	VII	C-E100054	VI		677	C-F300014	231	C-K400062	615
C-E100005	29	C-E200001	XVI		679	C-F300027	231	C-K400063	615
	45	C-E200002	499		XIX	C-F300029	231	C-K400064	615
	47		505	C-E400003	173	C-F400001	680	C-K400065	615
	49		511		658	C-F400002	680	C-K400066	615
	437		573		663	C-F400003	680	C-K400067	615
	VIII		575		677	C-F400004	680	C-K400068	615
C-E100010	73		590		685	C-F400005	687	C-K400069	615
	75		XVI		XIX	C-F500001	505	C-K400070	615
	421	C-E200003	501	C-E500002	XXVIII		511	C-K400071	615
	423		595	C-E500003	XXVII	C-F500002	499	C-K400072	615
	427		597	C-E500004	XXV		501	C-K400073	615
	429		599	C-E500005	XXV		503	C-K400074	615
	431		601	C-E500006	XXV	C-F500003	499	C-K400075	615
	435		649	C-E500007	XXV		501	C-K400076	197
	437		XVI	C-E500008	XXV		503		685
	439	C-E200004	481	C-E500009	XXV	C-F500004	680	C-K400077	197
	441		505	C-E500010	XXV	C-F500005	680		685
	443		569	C-E500011	586	C-F600002	29	C-K400080	197
	VII		573		XXVII		31		685
C-E100011	73		577	C-E500012	XXVII	C-F600003	211	C-K400081	42
	75		581	C-E500013	XXVII	C-F600004	211	C-K400082	42
	421		586	C-E500014	XXVII	C-F600005	211	C-K400083	42
	423		589	C-E500015	439	C-F600006	211	C-K400084	42
	427		590		501	C-K100001	652	C-K400085	42
	429		595		XXVII	C-K100002	652	C-K400086	42
	431		XVI	C-E500016	XXVI	C-K100003	652	C-K400087	42
	437	C-E200005	481	C-E500017	XXVI	C-K100004	652	C-K400088	42
	439		586	C-E500019	XXVI	C-K100005	652	C-K400089	42
	441		589	C-E500020	II	C-K100006	652	C-K400090	42
	443		XVI	C-E500021	II	C-K100007	680	C-K400091	42
	VIII	C-E200006	481	C-E500022	II	C-K100008	680	C-K400092	42
C-E100012	35		505	C-E500023	XIV	C-K100009	680	C-K400102	42
	37		569	C-E700001	XXIV	C-K100010	680	C-K400103	42
	39		573	C-E700002	437	C-K100011	680	C-K400104	42
	41		577		447	C-K100015	672	C-K400105	42
	VIII		581		651	C-K100016	672	C-K400108	42
C-E100013	47		586		660	C-K100017	671	C-K400109	42
	VIII		589		665	C-K100018	671	C-K400110	42
C-E100016	35		590		675	C-K100019	673	C-K400111	42
	37		595		677	C-K100020	673	C-K400114	42
	39		XVI		XXIII	C-K100021	167	C-K400115	42
	41	C-E200007	501	C-E700003	439		681	C-K400116	42
	45		595		501	C-K100022	167	C-K400117	42
	47		597		586		681	C-K400118	42
	49		599		XXIII	C-K100025	673	C-K400119	42
	53		601	C-E700004	683	C-K100026	672	C-K400120	42
	55		649		XXIV	C-K100027	672	C-K400121	42
	57		XVI	C-E700005	437	C-K100028	673	C-K400122	42
	59	C-E200008	499		447	C-K100029	673	C-K400123	42
	77		505		651	C-K100032	680	C-K400124	42
	151		511		660	C-K200001	671	C-K400125	42
	VIII		573		665	C-K200002	671	C-K400126	42
C-E100019	II		575		675	C-K200003	671	C-K400127	42
C-E100030	VIII		590		XXVIII	C-K200004	671	C-K400128	42
C-E100031	VIII		XVI	C-E700010	XXIV	C-K200005	671	C-K400129	42
C-E100032	VIII	C-E200011	499	C-E700011	XXIV		672	C-K400130	42
C-E100033	31		XVI	C-E700012	II	C-K200007	671	C-K400131	42
	45	C-E200012	499	C-E700013	XXII		672	C-K400132	29
	47		XVI	C-E700014	XXII	C-K200009	673	C-K400134	31
	449	C-E300001	XIII	C-E700015	XXV	C-K400028	42	C-K400135	31

Code	Page
	237
	241
	269
	299
	303
	307
	311
	31
	319
	321
	323
	325
	327
	329
	357
	375
	377
	385
	389
	391
	403
	409
	411
	529
	535
	III
KIT0083	551
	609
KIT0096	345
KIT0097	65
	67
	137
	153
KIT0098	345
KIT0099	345
KIT0106	209
KIT0107	335
KIT0108	335
KIT0110	209
KIT0112	249
KIT0113	249
KIT0116	611
KIT0120	271
	273
KIT0121	271
	273
KIT77	611
KIT9095	633
W-F900001	605
C-E100046	595

FINISHES

VARNISHED

						
Text white R9003	Text black R9005	Text deep blue R5011	Text petrol R6004	Text peach R3012	Text brilliant grey R9006	Text light Grey R7035
						
Text azure blue R5009	Text opal green R6026	Text vermilion red R2002	Text rubin R3003	Text black grey R7021	Text green R6031	Text basalt grey R7012
						
Text terracotta	Text dusty blue R5024	Text pastel green R6019	Text sand	Text sablè	Painted tiffany green	Dark brown
						
Painted gold	Painted copper	Painted brushed copper				

POLISHED

						
Polished white R9016	Polished black R9005	Polished brass	Polished aluminium	Polished (galvanic) gold	Polished (galvanic) copper	Polished (galvanic) chrome
						
Mirrored bronze						






BRUSHED

				
Brushed gold	Brushed steel	Brushed dark grey	Brushed natural brass	Brushed nickel

STEEL & ALUMINIUM

			
Steel / Aluminium	Stainless steel	Anodised aluminium	Anodised black aluminium

GLASS / PLASTICS

						
White glass	Amber glass	Smoked glass	Satin glass	Transparent glass	Transparent PMMA	Transparent polycarbonate
						
Opaline polycarbonate	Natural polyethylene	Lava polyethylene	White polyurethane			

OTHER

					
Statuary	Nero greco	Primer	Concrete	Burnished	Oak wood

HOW TO READ SYMBOLS

	Indoor installation		Class III - IEC protection class
	Outdoor installation		Over Voltage Protection
	Wall mounting		Smartwave™
	Ground mounting		Constant Current
	Ceiling mounting		Constant Voltage
	Wall or ground mounting		Dimming On Board Integrated potentiometer
	Ceiling or wall mounting		1-10 V
	Ceiling, wall or ground mounting		Digital Addressable Lighting Interface
	Protection index (IEC 60529) against foreign bodies and water		Digital Addressable Lighting Interface
	Product designed to withstand temporary immersions		Digital Addressable Lighting Interface
	Optical compartment protection index		PointToPoint DALI. Dimming on single item
	Protection index (IEC 62262) against external mechanical impacts		Technology Wi-Fi i-Led
	Walkable device		RDM, DMX 512
	Carriageable device		Casambi
	Stainless steel		Matter
	Circular installation hole		Infrared
	Square installation hole		Radio frequency remote control
	Directional light beam		P.I.R. Sensor
	Tilting light beam		Light + Motion sensor
	Power supply cable included		Power supply with safety transformer
	Device suitable to be mounted on furniture		Independent power supply
	Device suitable to be mounted on normally flammable surfaces (EN 60598)		Thermally protected power supply
	Device with built-in thermal protection		Reinforced insulation
	Driver included		Unified Glare Rating
	Driver not included		BUG Rating
	Class I - IEC protection class		Integrated antenna
	Class II - IEC protection class		External antenna

	The power supply does not switch into the installation hole
	Electrostatic discharge protection
	Over Voltage Protection
	Version suitable for ATEX 2,22 areas
	Internal Driver Micro driver on-board
	The driver contained in the device complies with IEC 61347-2-13 annex J
	Emergency version

Les schémas de connexion des composants électroniques sont disponibles dans la documentation technique.

The connection diagrams for electronics articles are included in the technical documentation.

Les dessins, les cotes, les matériaux et les couleurs du présent catalogue sont donnés à titre indicatif. Dans l'intérêt des clients, la société se réserve le droit de modifier les modèles à tout moment et sans préavis.

« **Linea Light Group** » se réserve le droit, à tout moment et sans préavis, de modifier les caractéristiques de ses produits et leur disponibilité. Tous les produits, données techniques, illustrations et informations du catalogue ne sont pas contractuels pour « **Linea Light Group** ».

« **Linea Light Group** » ne pourra être tenu responsable des éventuelles erreurs d'illustration, de texte et/ou de traduction. Les autres caractéristiques des produits sont décrites dans les fiches techniques et les notices d'instructions correspondantes. Ce catalogue est protégé par la loi sur les droits d'auteur (loi 22/04/1941 n° 633 et loi 14/12/1942 n° 1485 : toute reproduction totale ou partielle du présent catalogue est interdite).

Toutes les valeurs indiquées dans ce catalogue sont des valeurs mesurées. Les données de flux, de CCT et de puissance sont soumises à des tolérances de +/- 10 %. Les données de flux sont calculées sur la finition la plus claire.

The drawings, the measurements, the materials and the colours in this catalogue are understood to be indicative. In the interest of the clientele, the company reserves the right to modify the models at any time and without any obligation of advance notice.

"**Linea Light Group**" reserves the right, without any advance notice, to change the characteristics of their products, as well as the availability of the same at any time. No product, relative technical data, illustrations and information in the catalogue are binding for "**Linea Light Group**". "**Linea Light Group**" will not be held liable for any illustration, text and/or translation errors. More product characteristics are contained in the relative technical data sheets and instruction sheets. This catalogue is protected by copyright (law 22/04/1941 No. 633 and law 14/12/1942 No. 1485: this prohibits any reproduction, total or even partial). All values indicated in the catalogue are measured values. There is a +/- 10% tolerance for the flow, CCT and power data. The flow data are calculated on the lightest finish

HOW TO READ THE CATALOG

		Cct	Lumen Source	Lumen Delivery	
Optics	Opt	2700K	1338 lmS	1127 lmD	
	DI				Code
	DI				CA089DWHMDI
Finishes	DI				CA089DBBMDI
	DI				CA089DBEMDI
	DI				CA089DGBMDI
	DI				CA089DLUMDI
	Opt	3000K	1408 lmS	1186 lmD	
	DI				CA089DWHWDI
	DI				CA089DBBWDI
	DI				CA089DBEWDI
	DI				CA089DGBWDI
	DI				CA089DLUWDI

Technical drawing, symbols and data tables.

Section icon and page references to other families

Product image in various finishes

Web App QR Code

Visual rubrication

Family name

Product description

Family name



Finishes Text white R9003 Text peach R3012 Text deep bue R5011
 Text black R9005 Text petrol R6004

RAL finishes

Electronics, accessories and recessed casings

LINEALIGHT COLLECTION

ADDRESSES

Linea Light HQ Italy Via Europa, 14 31028 Vazzola TV Italy +39 0438 444826 info@linealight.com	Linea Light HUB Milano Via Giovanni Boccaccio, 15/A 20121 Milano MI Italy +39 02 36750915 milano@linealight.com	Linea Light Nord-Est Via Medoaco 4 c/o Hope Center 35135 Padova PD Italy +39 049 7969440 nordest@linealight.com
Linea Light Roma Via La Spezia, 34 00182 Roma Italy +39 06 68589134 info@linealightroma.com	Linea Light UK Suite205 The business design center 52 Upper Street Islington N10QH London United Kingdom +44 0203 6371983 info@linealight.co.uk	Linea Light France Rue des Pays-Bas 12 68310 Wittelsheim France +33 389 75 52 23 info@linealight.fr
Linea Light Deutschland Aktienstraße 214 45473 Mülheim an der Ruhr Germany +49 208 299979-0 service@linealight.de	Linea Light Greece 538 Vouliagmenis Ave. 17456 Alimos Athens Greece +30 210 9940559 g.virinis@linealight.com	Linea Light Spain C/ Longares, 48 28022 Madrid Spain +34 912534773 gestion@linealight.com
Linea Light USA - Inter Lux 3741 Commerce Drive - Suites 306-308 MD21227 Baltimore USA +1 410 381 1497 answers@inter-lux.com	Linea Light GCC P.O. Box 125902 Jumeirah Lake Towers JBC2 35 th Floor Office 04 Dubai UAE +971 4 4218275 info@linealight.ae	Linea Light Asia - Pacific No. 7, Nanyi Huayuan Road, Industry Avenue, 528478 Xiaolan Town, Zhongshan City, Guangdong Province China +86 760 87618355 info@linealight.com.cn
Linea Light Singapore 21 Kaki Bukit Place, 5th Fl. 416199 Singapore Singapore +65 6908 5758 info.sg@linealight.com		

linealight.com

Printed in Italy | June 2025

Illustration | Linea Light Group Marketing Dept., Matteo Lavazza Seranto, Nerokubo, Imagine Computer Graphics

Credits | aDoc medical clinic, Gualdo Tadino, Perugia IT - Project A25, Ph Mattia Micheli | Almar Hotel, Jesolo, Venice IT - Ph Studio Pointer | Andros Queen, Golden Star Ferries maritime company, Greece - Design Drakatos | Aria Retreat & SPA, Cima di Porlezza, Como IT - Project R4M Engineering, LD Light+Arch Consultancy arch. Giorgio Colombo, contract&custom lighting Bespoke Lighting Solutions, building Quadrio Gaetano Costruzioni Spa, Ph Andrea Martiradonna | Cantina Bottenago, Polpenazze del Garda, Brescia IT - Project Arch. Massimiliano Cirani, LD Viola Elettrotecnica, Ph Marco Reggi | CAP Holding Spa, Milan IT - Project studio Claudio Lucchin & Architetti Associati, int. design Alterstudio Partners, Ph Margherita Nardi | Cappella del Machiostro, Cattedrale di San Pietro Apostolo, Treviso IT - LD Studio Tecnico Ing. Carlo Chiodin, Arch. Alessandro Chiodin, Ph The Studio | Cappella del Santissimo, Duomo di Santa Maria Assunta, Asolo IT - Ph The Studio CHQ Building / The Vaults - Dublin, IE - LD Britelux Lighting Ltd. | CO99 Art Building & OPR Gallery, Milan IT - Project arch. Federico Regazzoni, LD Light+Arch Consultancy arch. Giorgio Colombo, Ph Marco Reggi | Dveri Pax, Jarenina, Slovenja | Endress + Hauser, Cernusco sul Naviglio, Milan IT - LD Dara Progettazioni, Ph Andrea Badoni | Fabio Cars, Caltagirone IT - Project Studio3000 Architettura e Design, design Arch. Marco Scebbia, design collab. Arch. Nunzio Andrea Zago, Ph Davide e Umberto Di Pasquale & Figli Fotografi | Flamingo Paradise Beach Hotel, Cyprus GR - Project Constanti Architects - Ena Pros Ekato, LD IFI Group, Ph PanVrahimis | Frantoio Centumbrie, Agello, Perugia IT - Project Gianmarco Balucani, LD Prait / Simone Suriani, design Miriam Cinaglia, Ph Matteo Canestraro | HappyFit Vicenza IT | Hotel Sofitel Barcelona ES - LD Fantastico Lighting Partners + Autentico Architectural Lighting Design, Ph Jordi Anguera | House AF, Alghero IT - Project DomECO, Ph Marek Jarosz | House DG, Rossano Veneto, Vicenza IT - Project Didonè Comacchio Architects, Ph Kassel+Wassel | House SGC, Aci Sant'Antonio, Catania IT - Project Arch. Silvia Spina, Ph Inclined 2 Photography / Giorgio Bottiitta | IRI hq, Milan IT - LD Studio Garibaldi Architects, Ph Giacomo Albo | John Reed Fitness Music Club, Trieste IT - RGS Group (Samuele Frosio, Tilman Schmidt, Konstantina Gkovari), Ph Cristiandeklic Photography | Krujë Castle, Krujë, Albany - LD Fulvio Baldeschi, Ph Pietro Savorelli | KWERK Tour First, Paris FR - Project Arch. Albert Angel Architecture & Design, Ph Nicolas Cardin | L'Angolo dei Poeti, Udine IT - Ph Matteo Lavazza Seranto | Maglificio MICA, Resana, Treviso IT - Arch Severino Bragagliolo / Studio 32, Ph The Studio | Membership Private Club, Milan IT - Project&LD Christian Grande, Ph Marco Reggi | Padova Congress, Padua IT - Project Arch. Kengo Kuma, LD Cogevi, Ph The Studio | Prati Rione Restaurant, Rome IT - Project Arch Gianluca Gentili, Ph Matteo Canestraro | Private House, Milan IT - Ph. Andrea Badoni | Private Villa, Castelfranco V.to, Treviso IT - Arch. Design Studio Architetti Associati Gianpietro & Stefano Cinel, Ph The Studio | Private Villa, Madrid - Project Oscar Abril Revuelta, Ph Marek Jarosz | Private Villa, Treviso IT - Project Arch. Francesco Stimamiglio | Residence "La Quercia", Castelfranco V.to, Treviso IT - Project Cinel Architetti, Ph Record Studio | Residence Civico 3.9, Castelfranco V.to, Treviso IT - Project Studio Architetti Associati Gianpietro & Stefano Cinel, Ph The Studio | Residential Home, Empordà ES - Project Studio Gama, LD Vié II-Luminació / Anna Vié, int. design A&P interiorismo (Loles Armengol y Eva Pallarès), Ph Jordi Anguera | Saluber, Calcinato, Brescia IT - Project Architetti Borgognoni e Sisti, Ph Marco Reggi | Sándgold Alpine Glamping, Campo Tures, Bolzano IT - Project Arch. Benedikt Wieser - Wieser, Ph Francesco Giuliano | Shine Residence, Jesolo, Venice IT | The Westin London City, London IT - Dexter Moren Associates, LD Nulty Lighting, Ph. Matteo Barro | Valentini Interiors Snc and Valentini Srl, Cadoneghe, Padua IT



LIGHT UP NEW IDEAS!

linealight.com